

14118 Stowe Drive, Suite B | Poway, CA 92064  
 TEL: (858) 621-2700 | FAX: (858) 486-1927  
 URL: [www.zcomm.com](http://www.zcomm.com)  
 EMAIL: [applications@zcomm.com](mailto:applications@zcomm.com)

### Voltage-Controlled Oscillator Surface Mount Module


#### Applications

- Personal Communication Systems
- Earthstations
- Portable Radios

#### Application Notes

- AN-101: Mounting and Grounding
- AN-102: Output Loading
- AN-107: Manual Soldering

#### PHASE NOISE (1 Hz BW, typical)

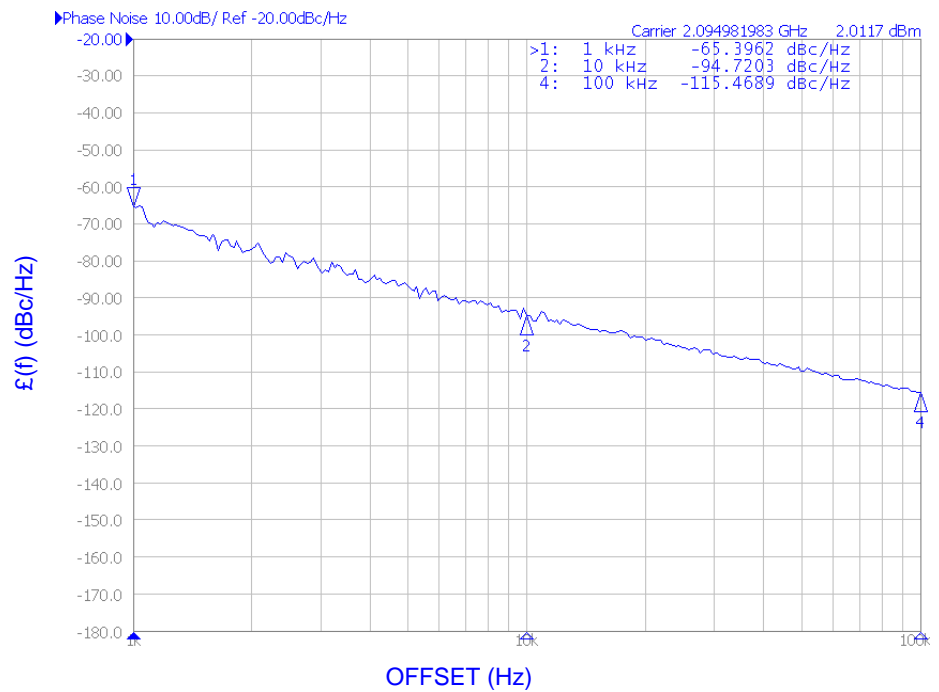

#### Performance Specifications

	Min	Typ	Max	Units
Oscillation Frequency Range	1990		2200	MHz
Phase Noise @ 10 kHz offset (1 Hz BW)		-94		dBc/Hz
Harmonic Suppression (2nd)		-10	-8	dBc
Tuning Voltage	0.5		4.5	Vdc
Tuning Sensitivity (avg.)		70		MHz/V
Power Output	6	8	10	dBm
Load Impedance		50		$\Omega$
Input Capacitance			50	pF
Pushing			4	MHz/V
Pulling (14 dB Return Loss, Any Phase)			15	MHz
Operating Temperature Range	-30		75	$^{\circ}\text{C}$
Package Style	MINI-16-L			


#### Power Supply Requirements

	Min	Typ	Max	Units
Supply Voltage (Vcc, nom.)		5.0		Vdc
Supply Current (Icc)		19	24	mA


#### Additional Notes

LFSuffix = RoHS Compliant. All specifications are subject to change without notice.


**Tuning Curve, typ.**

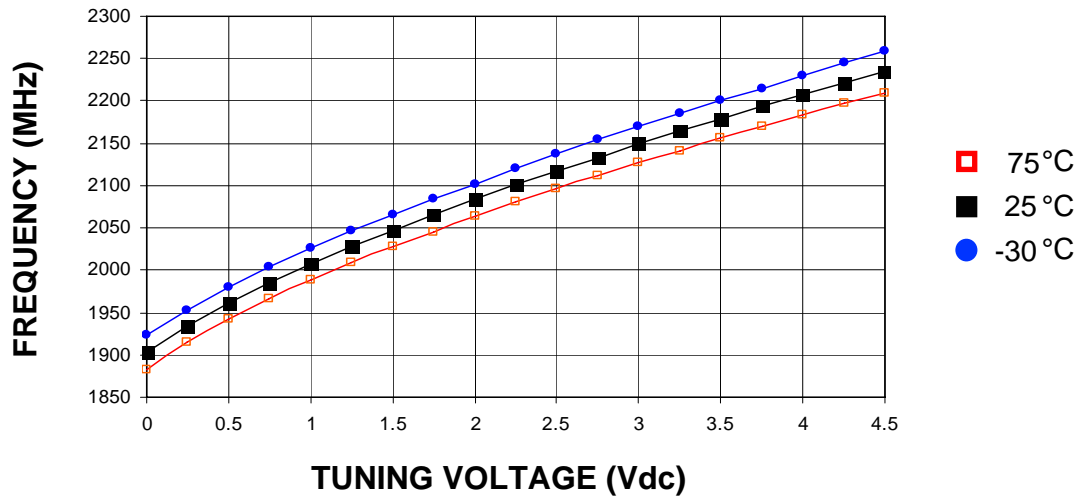


**Power Curve, typ.**

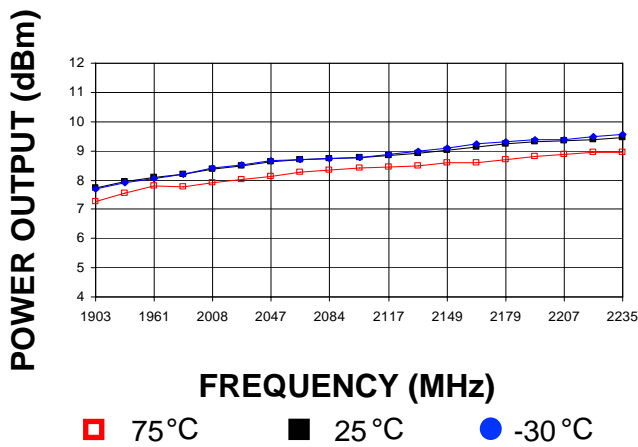

**Footprint**

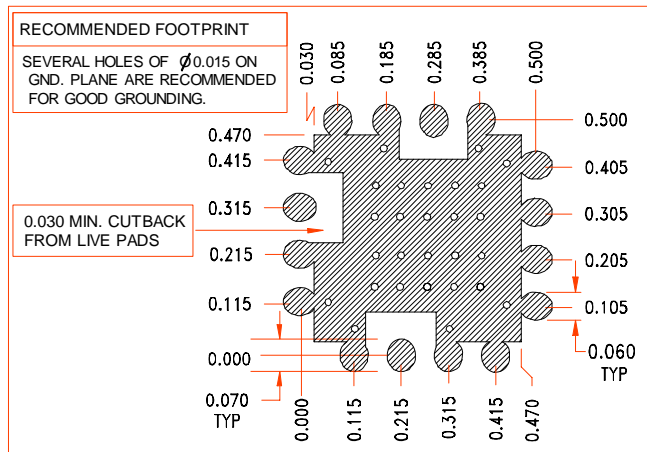

**Physical Dimensions**

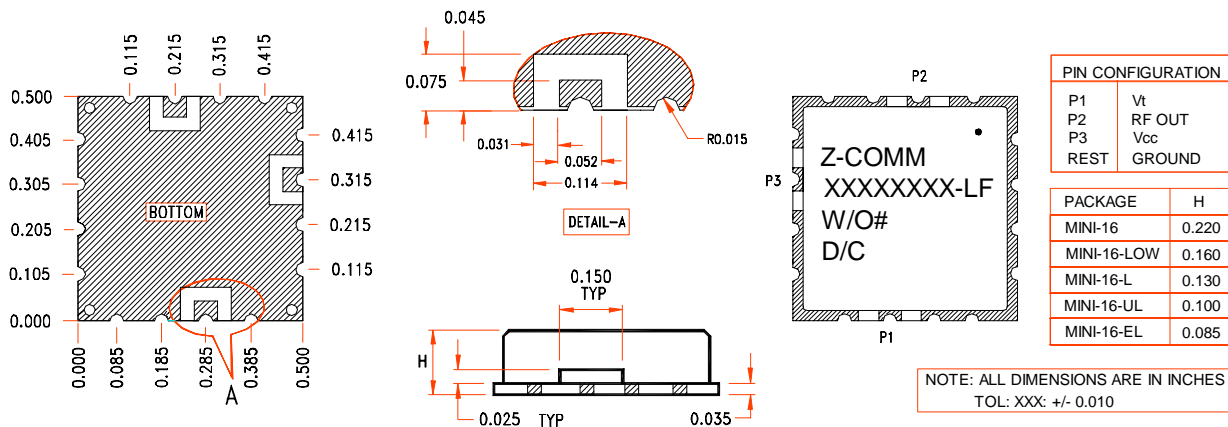

LFSuffix = RoHS Compliant. All specifications are subject to change without notice.