


KP106

Integrated Pressure Sensor IC for Side Crash Detection

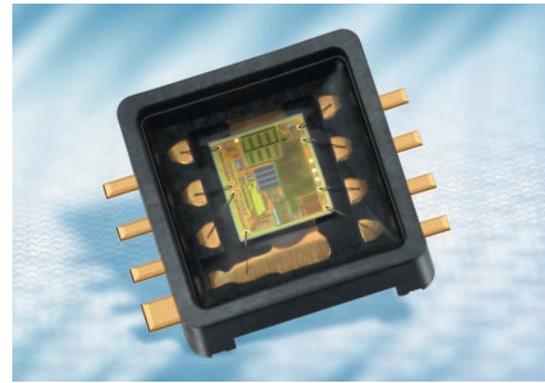


Application

KP106 is a pressure sensor system for the detection of side crashes in passenger cars. In this application, the pressure sensor is assembled in a module located within the car's side doors. When the door is compressed due to a side impact, the KP106 provides a signal pulse which is proportional to the pressure change inside the door. The height of the signal pulse depends on the relative pressure change. Therefore the output signal is independent of the ambient pressure.

Features

- PS15 compliant / Multi-Protocol
- Synchronous or asynchronous data transmission
- User specified protocol available
- 2-wire interface with on chip current modulator for Manchester communication
- E²PROM for ID number, calibration and mode selection
- Patented online diagnoses for pressure cells and circuitry
- Serial service interface
- On chip voltage regulator
- Reverse polarity protection

Application Circuit for the Pressure Sensor System

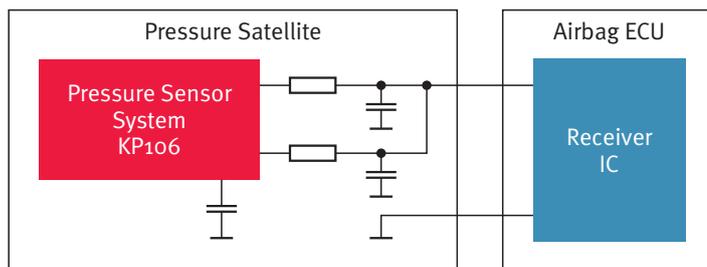


www.infineon.com/sensors

Sensors



Never stop thinking

Application Example: Airbag System

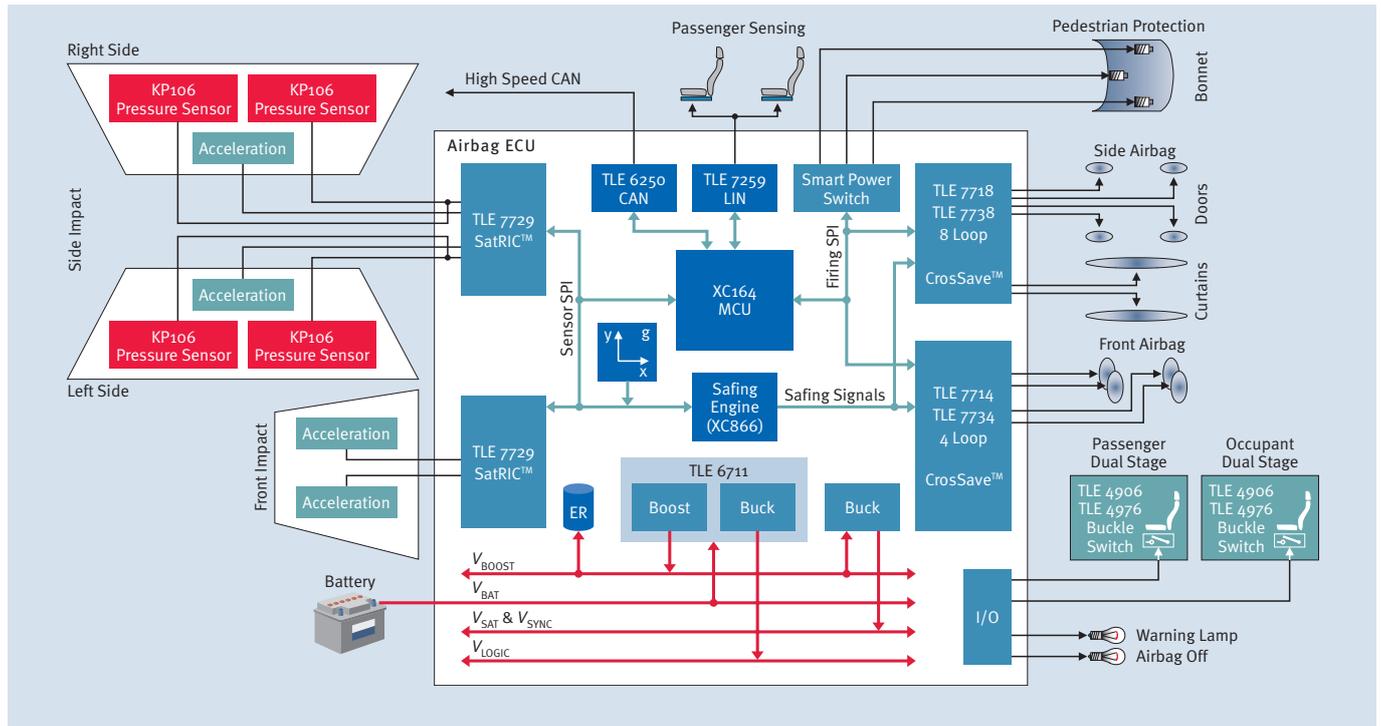

INFINEON TECHNOLOGIES offers an extensive product portfolio for occupant safety systems from micromachined sensors to smart power ICs and microcontrollers. The KP106 as an integrated pressure sensor systems for side crash detection, is a benchmark in terms of reliability and integration level.

Parameter	Range			Unit
	min.	typ.	max.	
Ambient Pressure Range	50		130	kPa
Supply Voltage	4.5		14.0	V
Supply Current into V_{DD}	5.0	8.0	10.0	mA
Signal Modulation Current	20.0	25.0	30.0	mA
Operating Temperature	-40		+90	°C
Internal Clock Frequency		8.0		MHz
Signal Conditioning Corner Frequency		370		Hz
Period of Data Transmission		228		µs

The surface micro-machined capacitive pressure sensor KP106 is designed to provide the relative pressure as a digital Manchester encoded output signal. This configuration is optimal for a single IC satellite system, where no further logic IC is used in the door module.

Type	Sales Code	Package
KP106	On request ¹⁾	PG-DSOF-8-13

¹⁾ Please contact your regional sales office

The sensor IC is mounted in an 8-pin plastic SMD PG-PSOF-8-13 package.

How to reach us:
<http://www.infineon.com>

Published by
 Infineon Technologies AG
 81726 Munich, Germany

© Infineon Technologies AG 2006.
 All Rights Reserved.

Legal Disclaimer

The information given in this Product Brief shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenheitsgarantie"). With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

Information

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office (www.infineon.com).

Warnings

Due to technical requirements components may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies Office.

Infineon Technologies Components may only be used in life-support devices or systems with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system.

Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

Ordering No. B138-H8611-G1-X-7600
 Printed in Germany
 PS 1106.5 nb