


# Legacy NMA2413-B1T 10 MHz to 4000 MHz

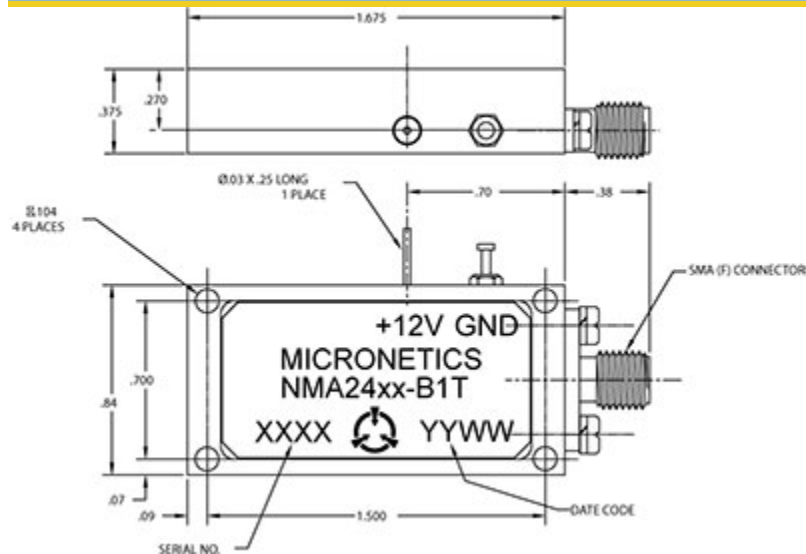

## Specifications

RF Frequency	10 MHz to 4000 MHz
Noise Output	78 dB Min ENR
Noise Spectral Density ( $N_o$ )	-96 dBm/Hz Min
Noise Power (N)	0 dBm min
Flatness	4 dB P-P Max
Peak Factor	5:1
Bias Voltage	12 V
Supply Current	350 mA Max
Impedance	50 ohms

## Package and Connectivity

Construction	Coaxial
Package Type	T Package
Connector Type	SMA(f)

## Environmental

Operating Temperature	-30 to 85 °C
Storage Temperature	-65 to 125 °C


## Notes

Option Standard No TTL

Specifications subject to change without notice

Micronetics, Inc. | Hudson, NH | Tel: 1-603-883-2900 | [www.Micronetics.com](http://www.Micronetics.com)

# MICRONETICS

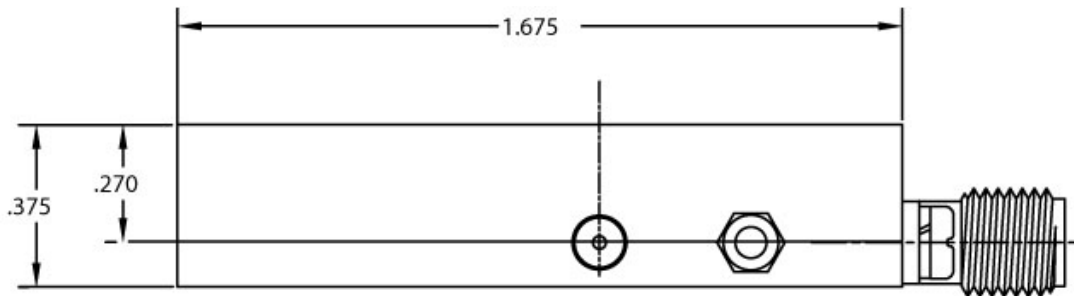

Ø.03 X .25 LONG  
1 PLACE

Ø.104  
4 PLACES

