


# Legacy NZG50-5M 100 Hz to 5 MHz

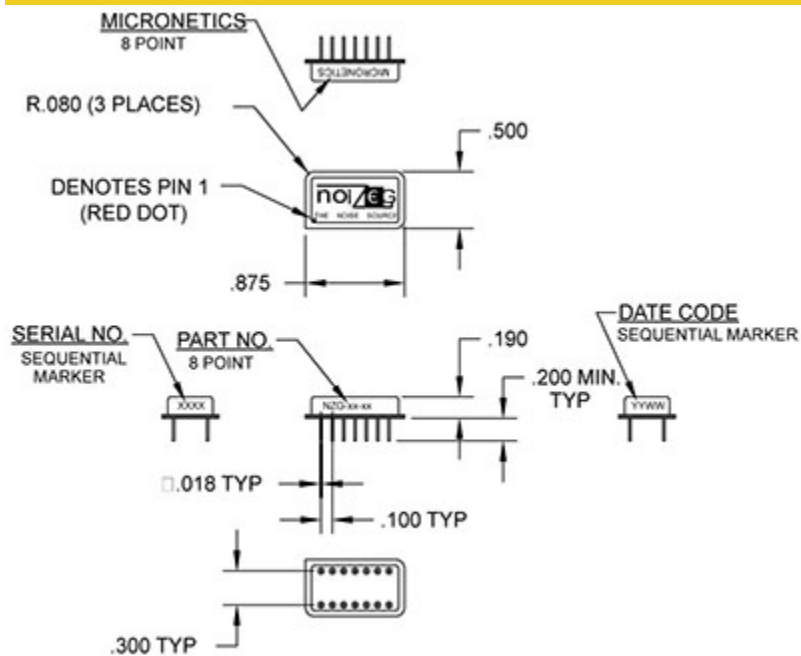

## Specifications

RF Frequency	100 Hz to 5 MHz
Noise Output	83.2 dB Min ENR
Noise Spectral Density ( $N_o$ )	-90.8 dBm/Hz Min
Noise Power (N)	50 mV min in Band
Peak Factor	5:1
Bias Voltage	15 V
Impedance	600 ohms

## Package and Connectivity

Construction	DIP 14 Pin
--------------	------------

## Environmental

Operating Temperature	0 to 70 °C
Storage Temperature	-60 to 150 °C

## Notes

Specifications subject to change without notice

Micronetics, Inc. | Hudson, NH | Tel: 1-603-883-2900 | [www.Micronetics.com](http://www.Micronetics.com)


# MICRONETICS

MICRONETICS  
8 POINT




R.080 (3 PLACES)

DENOTES PIN 1  
(RED DOT)

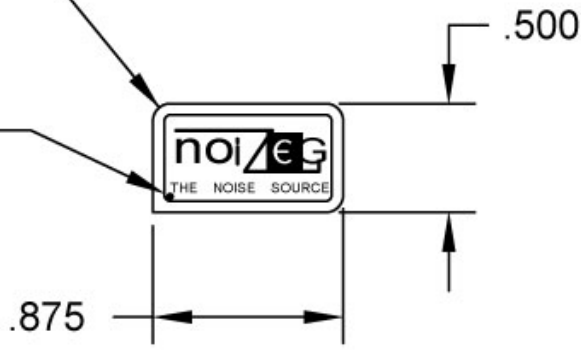


SERIAL NO.  
SEQUENTIAL  
MARKER

PART NO.  
8 POINT



DATE CODE  
SEQUENTIAL MARKER



□.018 TYP

.100 TYP

.190

.200 MIN.  
TYP

.300 TYP

