



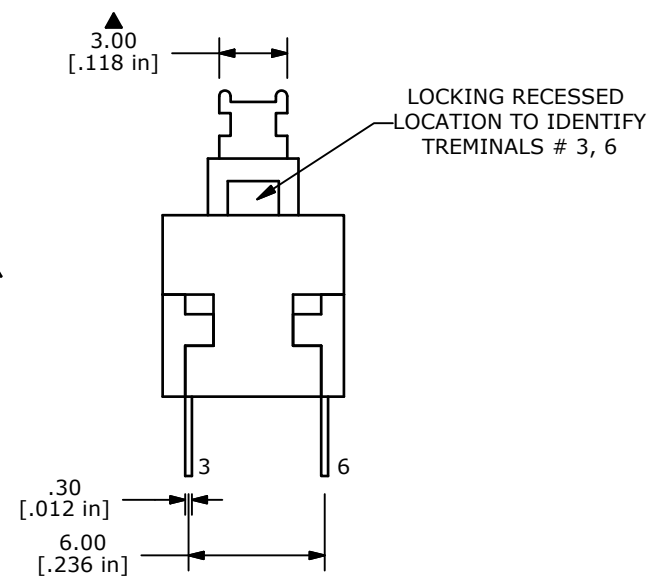
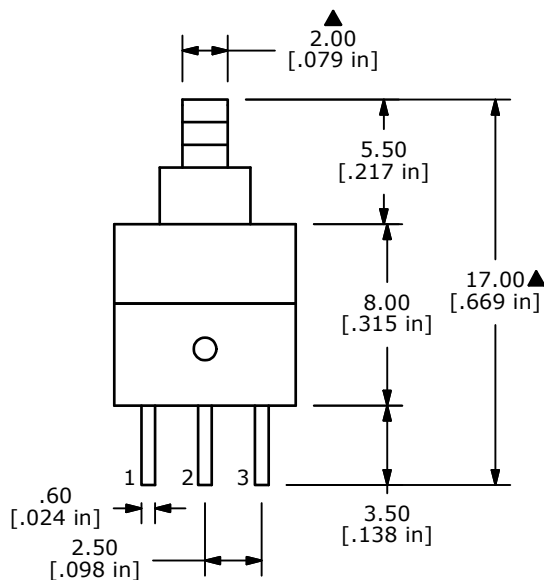


PCB LAYOUT

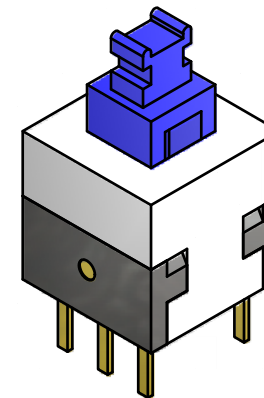

SWITCH FUNCTION	
POS. 1	POS. 2
ON	ON
3-1, 4-6	3-2, 4-5

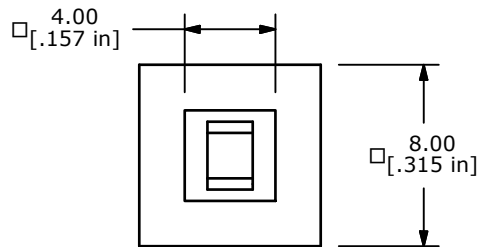

NOTES:

- ALL DIMENSIONS IN mm [INCHES]
- GENERAL TOLERANCE: x.x= ±0.4
x.xx=±.25
- TERM. NOS. FOR REF. ONLY
- RATING: 0.1A; 30V
- CONTACT RESISTANCE: 100 MILLI-OHMS MAX.
- TIMING: NON-SHORTING
- TRAVEL: FULL 2.5mm, LOCK 1.5mm
- OPERATING FORCE: 180 ± 50gf
- ELECTRICAL LIFE: 10,000 CYCLES MAKE AND BREAK
CYCLES AT FULL LOAD
- ▲ DENOTE CRITICAL PARAMETER
- 2002/95/EC (ROHS) COMPLIANT



D	19713	CORRECTED SWITCH FUNC. TERMINALS	2/24/11	BGL
C	19639	DRAWING UPDATE	2/1/11	BGL
REV	PCR NO	DESCRIPTION	DATE	BY

TITLE TL2285EE				
SCALE	DATE	DR	DWG	REV
3:1	2/1/2011	BGL	P010451	D

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED