

KR Electronics

General Description


KR 2831 is a 405 MHz surface mount bandpass filter. The filter has a minimum 1 dB bandwidth of 30 MHz. Other passband frequencies are available. Please consult the factory.

Features


- Surface Mount Package
- 50 Ω Source and Load

Typical Performance

Passband Amplitude & Group Delay (0.5 dB/div and 5 nsec/div)

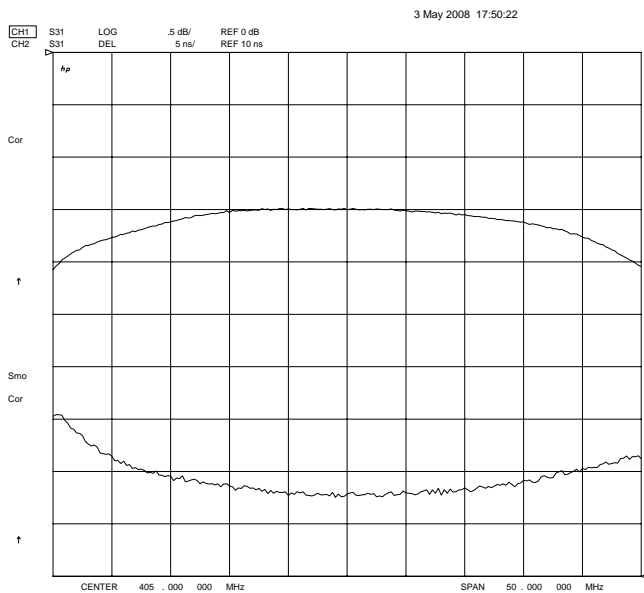

Overall Response (10 dB/div)

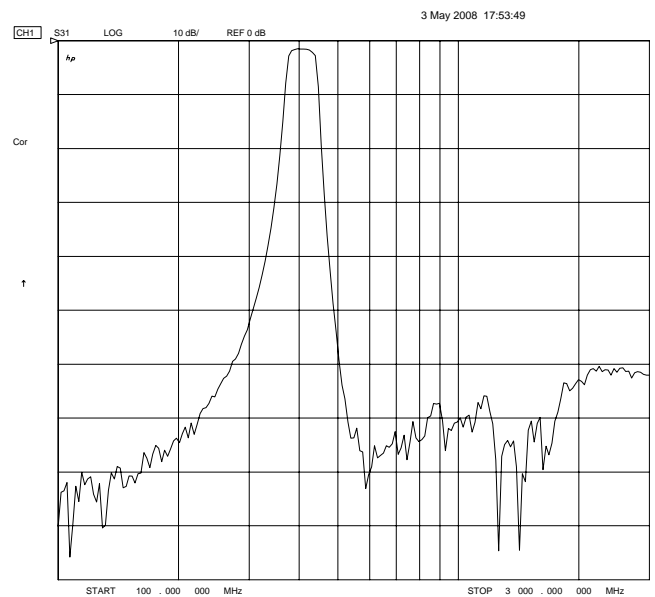

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001


Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

KR Electronics 2831

Specifications

Parameter	Specification
Filter type	Bandpass
Center Frequency	405 MHz
Insertion Loss	< 3 dB (1.5 dB typical)
1 dB Bandwidth	30 MHz min
Attenuation at 305 MHz & 505 MHz	45 dB min
Attenuation at 200 MHz & 600 MHz	60 dB min
Source and Load	50 Ω

Physical Dimensions

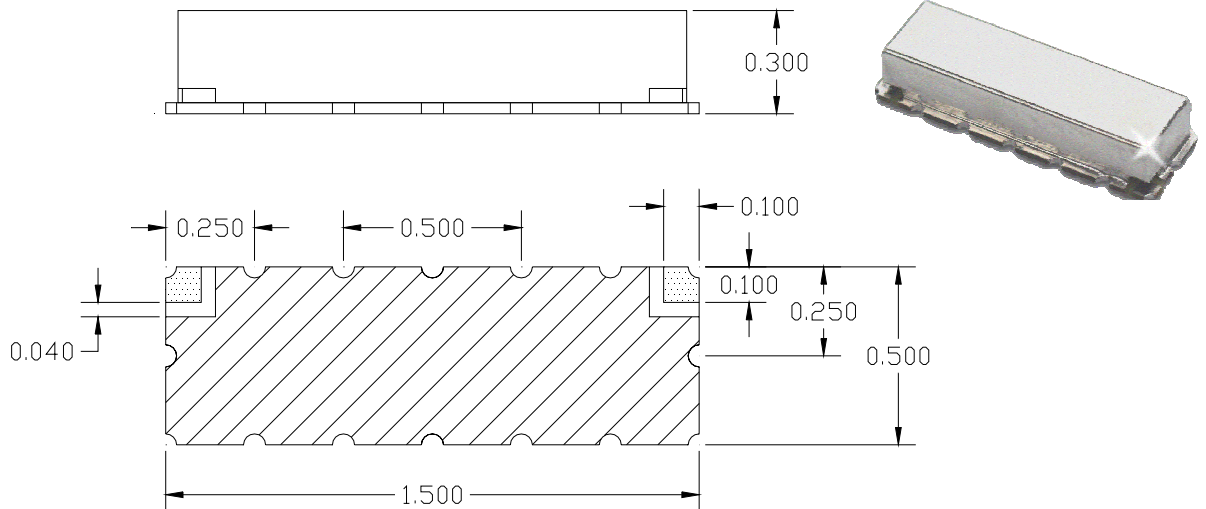

Notes:

1. Surface mount package — Metal cover, open frame
2. Dimensions in inches
3. Maximum reflow temperature 209° C for 10 seconds maximum
4. If boards are cleaned after installation, units must be completely dried