



SANYO Semiconductors

DATA SHEET

2SC5414A — NPN Epitaxial Planar Silicon Transistor

High-Frequency Low-Noise Amplifier Applications

Features

- High gain : $|S_{21e}|^2=9.5\text{dB typ (f=1GHz)}$.
- High cut-off frequency : $f_T=6.7\text{GHz typ}$.

Specifications

Absolute Maximum Ratings at $T_a=25^\circ\text{C}$

Parameter	Symbol	Conditions	Ratings	Unit
Collector-to-Base Voltage	V_{CB0}		20	V
Collector-to-Emitter Voltage	V_{CEO}		12	V
Emitter-to-Base Voltage	V_{EBO}		2	V
Collector Current	I_C		100	mA
Collector Dissipation	P_C		400	mW
Junction Temperature	T_j		150	$^\circ\text{C}$
Storage Temperature	T_{stg}		-55 to +150	$^\circ\text{C}$

Electrical Characteristics at $T_a=25^\circ\text{C}$

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Collector Cutoff Current	I_{CBO}	$V_{CB}=10\text{V}, I_E=0\text{A}$			1.0	μA
Emitter Cutoff Current	I_{EBO}	$V_{EB}=1\text{V}, I_C=0\text{A}$			10	μA
DC Current Gain	h_{FE1}	$V_{CE}=5\text{V}, I_C=30\text{mA}$	90*		270*	
	h_{FE2}	$V_{CE}=5\text{V}, I_C=70\text{mA}$	70			

Continued on next page.

* : The 2SC5414A is classified by 30mA h_{FE} as follows :

Rank	E	F
h_{FE}	90 to 180	135 to 270

■ Any and all SANYO Semiconductor Co.,Ltd. products described or contained herein are, with regard to "standard application", intended for the use as general electronics equipment (home appliances, AV equipment, communication device, office equipment, industrial equipment etc.). The products mentioned herein shall not be intended for use for any "special application" (medical equipment whose purpose is to sustain life, aerospace instrument, nuclear control device, burning appliances, transportation machine, traffic signal system, safety equipment etc.) that shall require extremely high level of reliability and can directly threaten human lives in case of failure or malfunction of the product or may cause harm to human bodies, nor shall they grant any guarantee thereof. If you should intend to use our products for applications outside the standard applications of our customer who is considering such use and/or outside the scope of our intended standard applications, please consult with us prior to the intended use. If there is no consultation or inquiry before the intended use, our customer shall be solely responsible for the use.

■ Specifications of any and all SANYO Semiconductor Co.,Ltd. products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.

SANYO Semiconductor Co., Ltd.

www.semiconductor-sanyo.com/network

2SC5414A




Continued from preceding page.

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Gain-Bandwidth Product	f_T	$V_{CE}=5V, I_C=30mA$	5	6.7		GHz
Output Capacitance	C_{ob}	$V_{CB}=5V, f=1MHz$		1.0	1.5	pF
Reverse Transfer Capacitance	C_{re}	$V_{CB}=5V, f=1MHz$		0.6		pF
Forward Transfer Gain	$ S_{21e} ^2$	$V_{CE}=5V, I_C=30mA, f=1GHz$	8	9.5		dB
Noise Figure	NF	$V_{CE}=5V, I_C=7mA, f=1GHz$		1.1	2.0	dB








Package Dimensions

unit : mm (typ)

7522-003

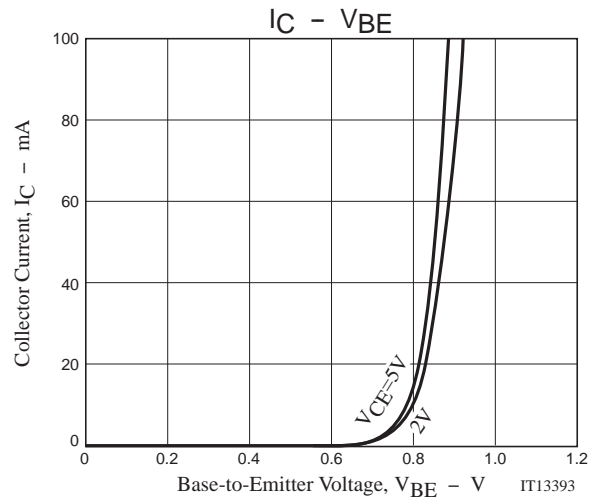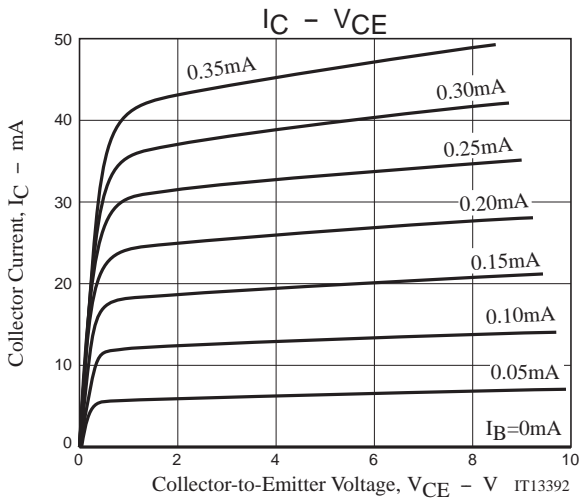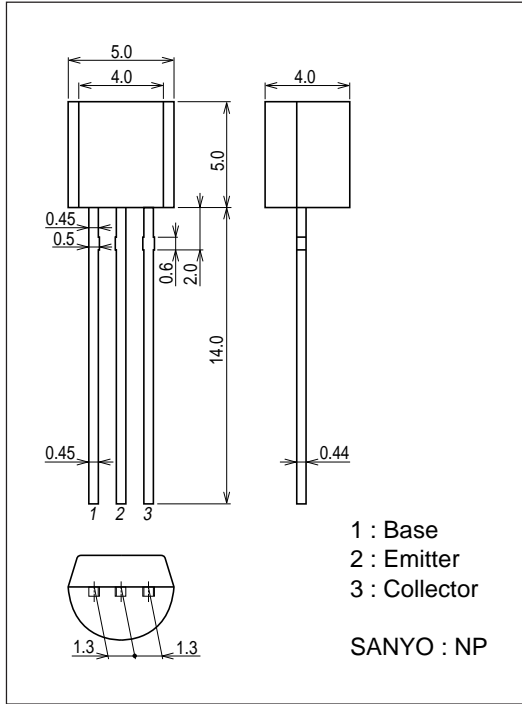

2SC5414A

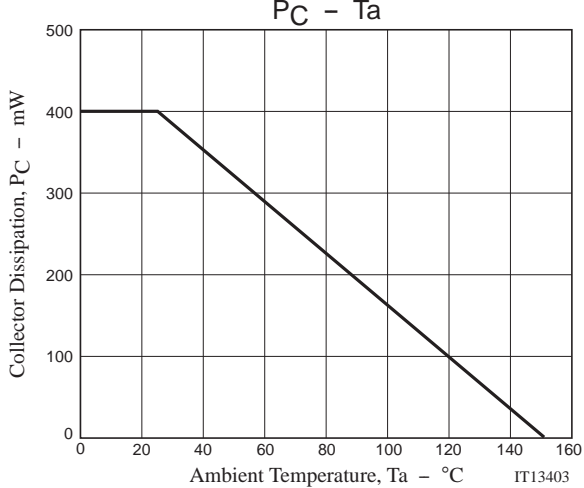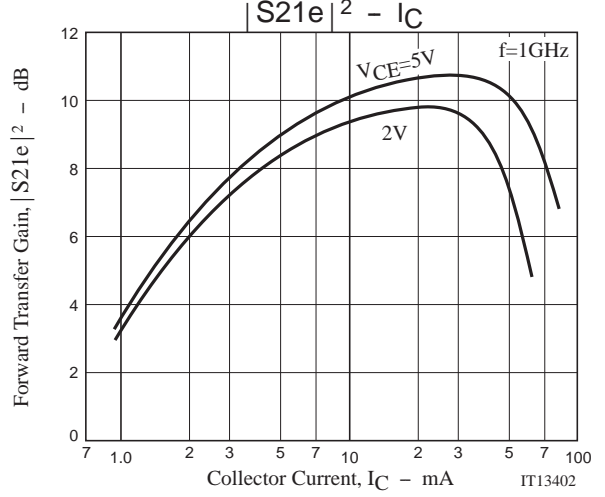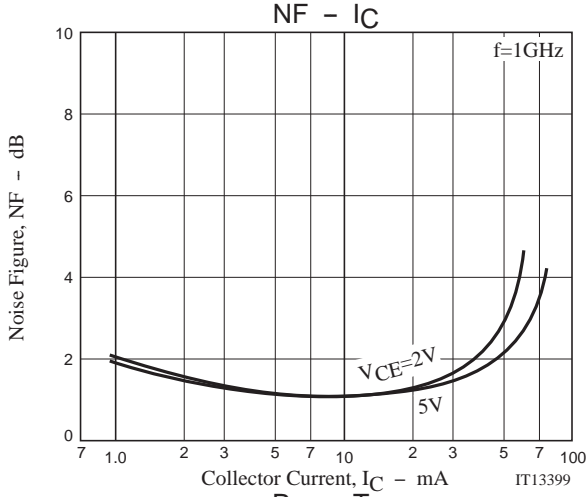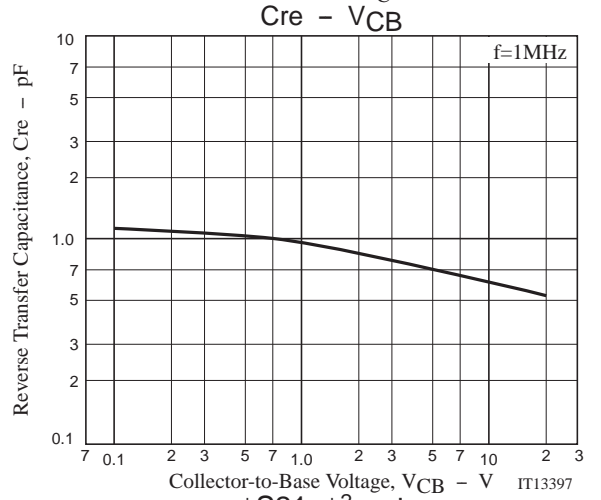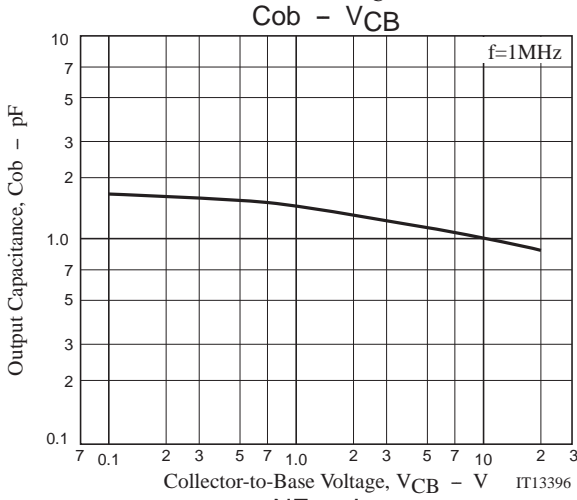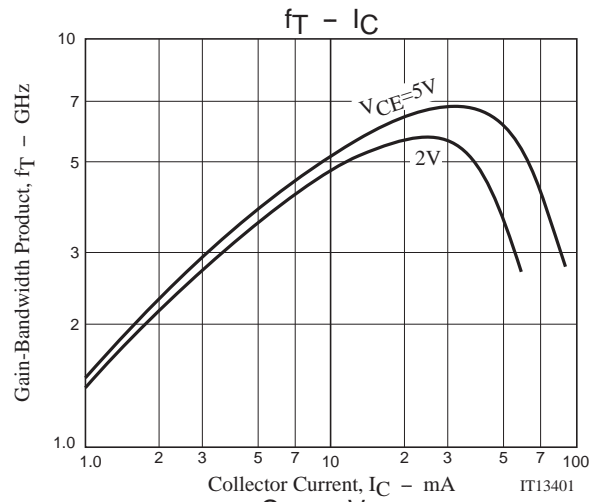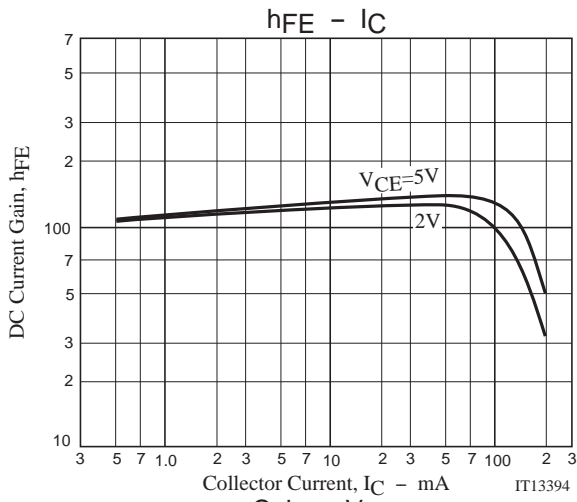

2SC5414A

S Parameters (Common emitter)

$V_{CE}=2V, I_C=5mA, Z_O=50\Omega$

Freq(MHz)	$ S_{11} $	$\angle S_{11}$	$ S_{21} $	$\angle S_{21}$	$ S_{12} $	$\angle S_{12}$	$ S_{22} $	$\angle S_{22}$
100	0.789	-46.1	12.790	142.7	0.041	66.1	0.870	-25.4
200	0.604	-80.1	9.631	117.8	0.063	53.1	0.691	-39.5
400	0.404	-123.7	5.802	90.2	0.090	44.6	0.510	-51.7
600	0.331	-153.8	4.101	72.4	0.112	42.2	0.444	-58.8
800	0.297	-177.9	3.180	58.0	0.137	39.3	0.419	-66.4
1000	0.281	160.9	2.642	45.5	0.163	35.7	0.413	-74.1
1200	0.275	140.4	2.254	32.7	0.190	31.0	0.410	-82.5
1400	0.277	122.6	1.983	21.5	0.218	26.0	0.405	-90.9
1600	0.281	103.9	1.787	10.3	0.247	20.5	0.395	-99.8
1800	0.295	89.0	1.626	-0.1	0.278	14.4	0.390	-108.3
2000	0.314	73.5	1.511	-10.3	0.311	7.7	0.380	-117.5

$V_{CE}=2V, I_C=10mA, Z_O=50\Omega$

Freq(MHz)	$ S_{11} $	$\angle S_{11}$	$ S_{21} $	$\angle S_{21}$	$ S_{12} $	$\angle S_{12}$	$ S_{22} $	$\angle S_{22}$
100	0.638	-60.1	18.641	131.8	0.036	63.1	0.754	-33.9
200	0.438	-95.8	12.165	107.7	0.054	55.5	0.549	-45.7
400	0.289	-138.8	6.728	84.2	0.083	53.2	0.392	-53.9
600	0.245	-168.0	4.654	69.1	0.113	50.5	0.348	-59.7
800	0.227	170.3	3.575	56.2	0.146	45.7	0.336	-67.3
1000	0.221	150.3	2.950	44.5	0.177	40.1	0.335	-75.3
1200	0.215	130.3	2.520	32.5	0.221	30.9	0.332	-86.7
1400	0.218	113.3	2.203	21.6	0.240	27.0	0.331	-92.3
1600	0.231	96.2	1.978	11.2	0.272	20.1	0.320	-101.1
1800	0.243	80.8	1.805	1.2	0.304	13.0	0.314	-109.7
2000	0.267	66.9	1.668	-8.9	0.336	5.5	0.306	-118.6

$V_{CE}=2V, I_C=20mA, Z_O=50\Omega$

Freq(MHz)	$ S_{11} $	$\angle S_{11}$	$ S_{21} $	$\angle S_{21}$	$ S_{12} $	$\angle S_{12}$	$ S_{22} $	$\angle S_{22}$
100	0.476	-75.8	22.939	121.7	0.031	62.9	0.633	-40.4
200	0.317	-113.1	13.544	100.3	0.047	61.2	0.427	-48.3
400	0.227	-155.0	7.193	80.3	0.081	59.5	0.319	-53.3
600	0.206	178.6	4.913	66.5	0.116	55.1	0.293	-59.0
800	0.195	158.2	3.764	54.3	0.151	49.1	0.289	-67.1
1000	0.194	139.7	3.091	43.4	0.186	42.4	0.291	-75.4
1200	0.198	121.4	2.632	32.0	0.220	34.9	0.294	-84.4
1400	0.204	105.8	2.305	21.3	0.253	27.5	0.290	-93.3
1600	0.213	89.2	2.066	11.2	0.285	20.1	0.281	-102.3
1800	0.230	75.2	1.881	1.5	0.318	12.5	0.275	-111.0
2000	0.252	62.9	1.742	-8.4	0.350	4.6	0.264	-120.0

$V_{CE}=2V, I_C=30mA, Z_O=50\Omega$

Freq(MHz)	$ S_{11} $	$\angle S_{11}$	$ S_{21} $	$\angle S_{21}$	$ S_{12} $	$\angle S_{12}$	$ S_{22} $	$\angle S_{22}$
100	0.403	-88.7	23.847	116.6	0.028	63.5	0.561	-42.5
200	0.284	-126.8	13.541	96.9	0.045	63.7	0.380	-47.5
400	0.228	-167.6	7.074	78.2	0.081	61.5	0.295	-51.3
600	0.217	169.3	4.827	65.0	0.116	56.8	0.275	-57.2
800	0.213	151.0	3.687	52.8	0.153	50.3	0.276	-66.0
1000	0.211	134.3	3.034	42.2	0.188	43.2	0.281	-74.9
1200	0.216	117.8	2.579	30.8	0.223	35.5	0.283	-84.2
1400	0.222	103.1	2.262	20.4	0.256	27.9	0.280	-93.2
1600	0.238	87.6	2.029	10.3	0.289	20.3	0.271	-102.4
1800	0.248	74.2	1.840	0.3	0.321	12.6	0.265	-111.2
2000	0.271	61.6	1.706	-9.7	0.354	4.5	0.254	-120.5

2SC5414A

S Parameters (Common emitter)

$V_{CE}=5V, I_C=5mA, Z_O=50\Omega$

Freq(MHz)	$ S_{11} $	$\angle S_{11}$	$ S_{21} $	$\angle S_{21}$	$ S_{12} $	$\angle S_{12}$	$ S_{22} $	$\angle S_{22}$
100	0.807	-41.4	12.983	145.1	0.032	68.1	0.899	-20.6
200	0.627	-72.5	10.034	120.7	0.052	55.7	0.748	-32.3
400	0.399	-114.4	6.208	92.5	0.074	47.6	0.590	-42.7
600	0.314	-144.0	4.422	74.9	0.093	45.2	0.532	-49.4
800	0.266	-169.8	3.425	60.3	0.115	42.9	0.514	-56.8
1000	0.242	168.7	2.831	47.9	0.137	39.8	0.512	-64.6
1200	0.230	146.1	2.422	35.3	0.161	35.8	0.510	-72.6
1400	0.227	125.8	2.121	24.0	0.186	31.3	0.508	-80.8
1600	0.237	105.7	1.902	13.1	0.212	26.4	0.504	-89.1
1800	0.249	88.5	1.725	3.1	0.240	21.0	0.501	-97.2
2000	0.273	72.7	1.595	-7.2	0.271	14.8	0.497	-106.0

$V_{CE}=5V, I_C=10mA, Z_O=50\Omega$

Freq(MHz)	$ S_{11} $	$\angle S_{11}$	$ S_{21} $	$\angle S_{21}$	$ S_{12} $	$\angle S_{12}$	$ S_{22} $	$\angle S_{22}$
100	0.664	-52.5	19.156	134.9	0.029	65.7	0.807	-26.7
200	0.450	-85.2	13.004	110.4	0.044	58.6	0.621	-36.3
400	0.264	-124.5	7.320	86.3	0.069	55.5	0.490	-42.7
600	0.206	-153.2	5.075	70.9	0.095	53.3	0.450	-48.6
800	0.175	-178.9	3.884	58.1	0.122	48.7	0.444	-56.0
1000	0.163	159.7	3.190	46.8	0.150	43.8	0.446	-64.0
1200	0.156	135.8	2.715	35.0	0.178	37.8	0.446	-72.4
1400	0.158	115.9	2.376	24.3	0.204	31.8	0.448	-80.6
1600	0.174	95.5	2.127	14.0	0.233	25.5	0.439	-88.9
1800	0.188	77.7	1.938	4.1	0.262	19.0	0.434	-96.9
2000	0.212	62.7	1.788	-5.6	0.292	12.0	0.431	-105.3

$V_{CE}=5V, I_C=30mA, Z_O=50\Omega$

Freq(MHz)	$ S_{11} $	$\angle S_{11}$	$ S_{21} $	$\angle S_{21}$	$ S_{12} $	$\angle S_{12}$	$ S_{22} $	$\angle S_{22}$
100	0.423	-71.0	26.259	120.2	0.024	66.3	0.647	-32.7
200	0.258	-103.4	15.300	99.6	0.038	65.6	0.482	-36.2
400	0.155	-145.0	8.070	80.5	0.068	63.8	0.405	-39.6
600	0.129	173.2	5.493	67.5	0.098	59.1	0.388	-45.9
800	0.119	161.6	4.203	55.9	0.129	53.1	0.390	-54.2
1000	0.116	140.1	3.436	45.4	0.160	46.5	0.396	-62.7
1200	0.119	117.4	2.914	34.2	0.190	39.4	0.401	-71.8
1400	0.129	98.0	2.545	24.3	0.219	32.5	0.398	-80.2
1600	0.146	79.7	2.284	14.2	0.249	25.3	0.393	-88.6
1800	0.160	65.1	2.064	4.9	0.278	18.2	0.389	-96.9
2000	0.187	54.4	1.913	-4.9	0.308	10.7	0.386	-105.3

$V_{CE}=5V, I_C=50mA, Z_O=50\Omega$

Freq(MHz)	$ S_{11} $	$\angle S_{11}$	$ S_{21} $	$\angle S_{21}$	$ S_{12} $	$\angle S_{12}$	$ S_{22} $	$\angle S_{22}$
100	0.381	-82.7	25.958	114.6	0.023	65.6	0.611	-32.2
200	0.251	-120.2	14.443	95.9	0.037	65.8	0.465	-34.5
400	0.185	-164.6	7.561	78.0	0.067	64.0	0.405	-38.7
600	0.174	170.5	5.153	64.8	0.096	59.6	0.396	-46.0
800	0.163	149.4	3.904	52.8	0.127	53.5	0.401	-54.9
1000	0.167	130.7	3.194	41.9	0.157	47.1	0.406	-63.5
1200	0.176	112.8	2.696	31.0	0.187	39.8	0.410	-72.9
1400	0.184	96.6	2.358	20.5	0.216	32.9	0.409	-81.5
1600	0.197	80.7	2.115	10.1	0.246	25.9	0.404	-90.3
1800	0.214	68.1	1.908	0.1	0.275	18.8	0.400	-98.2
2000	0.243	55.0	1.766	-9.6	0.305	11.1	0.392	-106.2

- SANYO Semiconductor Co.,Ltd. assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all SANYO Semiconductor Co.,Ltd. products described or contained herein.
- SANYO Semiconductor Co.,Ltd. strives to supply high-quality high-reliability products, however, any and all semiconductor products fail or malfunction with some probability. It is possible that these probabilistic failures or malfunction could give rise to accidents or events that could endanger human lives, trouble that could give rise to smoke or fire, or accidents that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all SANYO Semiconductor Co.,Ltd. products described or contained herein are controlled under any of applicable local export control laws and regulations, such products may require the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written consent of SANYO Semiconductor Co.,Ltd.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the SANYO Semiconductor Co.,Ltd. product that you intend to use.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production.
- Upon using the technical information or products described herein, neither warranty nor license shall be granted with regard to intellectual property rights or any other rights of SANYO Semiconductor Co.,Ltd. or any third party. SANYO Semiconductor Co.,Ltd. shall not be liable for any claim or suits with regard to a third party's intellectual property rights which has resulted from the use of the technical information and products mentioned above.

This catalog provides information as of September, 2009. Specifications and information herein are subject to change without notice.