



Frontier Electronics Corp.

667 E. COCHRAN STREET, SIMI VALLEY, CA 93065

TEL: (805) 522-9998 FAX: (805) 522-9989

E-mail: frontiersales@frontierusa.com

Web: <http://www.frontierusa.com>

6A GLASS PASSIVATED GENERAL PURPOSE RECTIFIER


GH60-005 THRU GH60-10

FEATURES

- UL 94V0 FLAME RETARDANT EPOXY MOLDING COMPOUND
- DIFFUSED JUNCTION
- HIGH SURGE CURRENT CAPABILITY
- BEVEL ROUND CHIP, AVALANCHE OPERATION
- GLASS PASSIVATED JUNCTION

MECHANICAL DATA

- CASE: TRANSFER MOLDED, GH, DIMENSIONS IN INCHES
- TERMINALS: PLATED 0.25" (6.35mm) FAST-ON TERMINALS
- POLARITY: CATHODE INDICATED BY COLOR BAND
- WEIGHT: 3.37 GRAMS

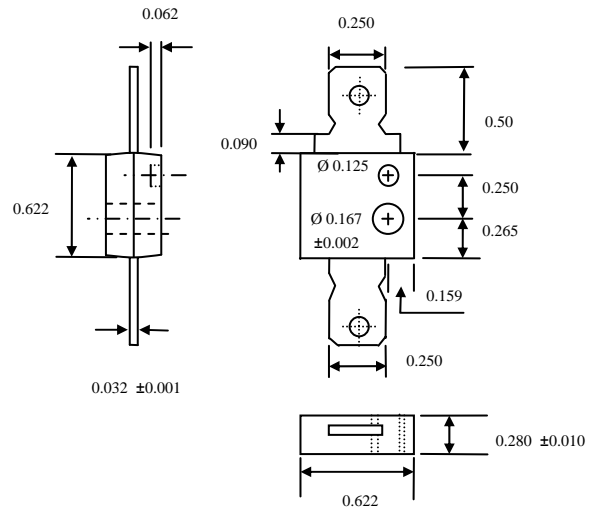

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS RATINGS AT 25°C AMBIENT TEMPERATURE UNLESS OTHERWISE SPECIFIED SINGLE PHASE, HALF WAVE, 60 HZ, RESISTIVE OR INDUCTIVE LOAD. FOR CAPACITIVE LOAD, DERATE CURRENT BY 20%

RATINGS	SYMBOL	GH60-005	GH60-01	GH60-02	GH60-04	GH60-06	GH60-10	UNITS
MAXIMUM RECURRENT PEAK REVERSE VOLTAGE	V_{RRM}	50	100	200	400	600	1000	V
MAXIMUM RMS VOLTAGE	V_{RMS}	35	70	140	280	420	700	V
MAXIMUM DC BLOCKING VOLTAGE	V_{DC}	50	100	200	400	600	1000	V
MAXIMUM AVERAGE FORWARD RECTIFIED CURRENT @TA60°C @TL60°C	I_O	6.0 22.0						A
PEAK FORWARD SURGE CURRENT, 8.3ms SINGLE HALF SINE-WAVE SUPERIMPOSED ON RATED LOAD	I_{FSM}	400						A
TYPICAL JUNCTION CAPACITANCE (NOTE1)	C_j	150						PF
TYPICAL THERMAL RESISTANCE	$R_{\theta ja}$	20						°C/W
STORAGE TEMPERATURE RANGE	T_{STG}	- 55 TO + 150						°C
OPERATING TEMPERATURE RANGE	T_{OP}	- 55 TO + 150						°C

ELECTRICAL CHARACTERISTICS (A_T T_A =25°C UNLESS OTHERWISE NOTED)

CHARACTERISTICS	SYMBOL	GH60-005	GH60-01	GH60-02	GH60-04	GH60-06	GH60-10	UNITS
MAXIMUM FORWARD VOLTAGE AT I _O DC	V_F	1.0						V
MAXIMUM REVERSE CURRENT AT 25°C	I_R	5						μA
MAXIMUM REVERSE CURRENT AT 100°C	I_R	50						μA

NOTE: 1. MEASURED AT 1MHZ AND APPLIED REVERSE VOLTAGE OF 4.0 VOLTS

RATINGS AND CHARACTERISTIC CURVES GH60-005 THRU GH60-10

FIG. 1 - FORWARD DERATING CURVE

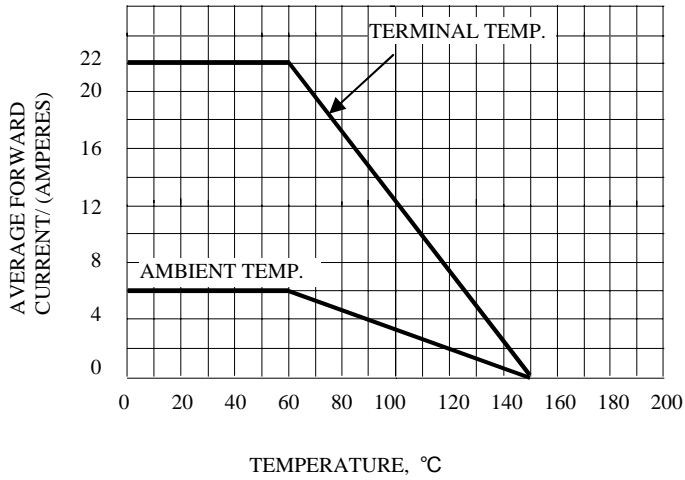


FIG. 2 - TYPICAL FORWARD CHARACTERISTIC

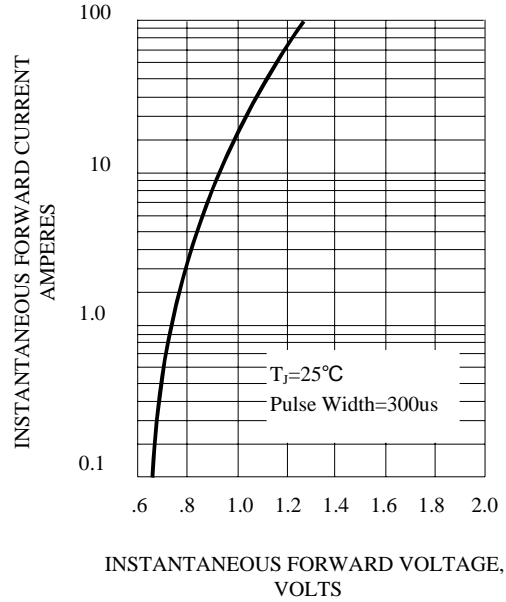


FIG. 3 - PEAK FORWARD SURGE CURRENT

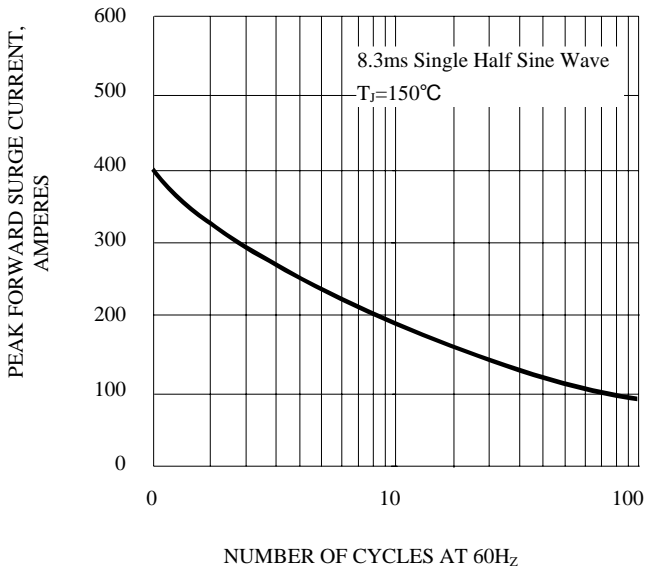


FIG. 5 - TYPICAL REVERSE CHARACTERISTIC

