



Target Applications

- · Factory display units
- Building control display units
- Ruggedized displays
- Industrial instrumentation

ower Architecture 10003


PXD20 Family Built on Power Architecture® Technology

Quality industrial display solutions

Overview

The PXD20 family of 32-bit MCUs built on Power Architecture® technology provides a cost-effective, single-chip display solution for the industrial market. Integrated TFT drivers with digital video input ability from an external video source, significant on-chip memory (including dedicated graphics memory) and low-power design methodologies provide flexibility and reliability in meeting display demands in rugged environments. The platform architecture includes on-chip display control units that directly drive up to two TFT displays. The PXD20 family offers you a high-quality industrial display solution.

PXD20 Block Diagram

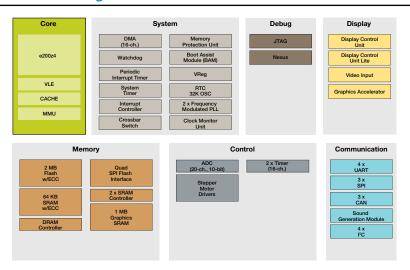



Enablement Ecosystem

The PXD20 family of MCUs is supported by the Tower development system, the complimentary MQXTM RTOS and the Swell PEG GUI development software enabling shorter development cycles.

Low-Power Design

- Designed for dynamic power management of core and peripherals
- Software-controlled clock gating of peripherals
- Multiple power domains to minimize leakage in low-power modes

Key Features

- Two display control units for direct drive of up to two TFT LCD displays with WVGA resolution
 - Single controller can drive a TFT LCD display with XGA resolution
- Graphics accelerator supporting OpenVG 1.1
- Digital input for video and data
- Memory:
 - o 2 MB on-chip flash memory with ECC
 - 1 MB on-chip non-ECC graphics SRAM with two-port graphics SRAM controller
- Stepper motor controller
- 10-bit ADC
- Two 16-channel timers
- DRAM controller—DDR1/2, LPDDR

Challenges and Solutions

System Challenges	PXD20 Solutions	
Reducing System Costs and Simplifying Design	 Integrated display controller reduces HMI design complexity On-chip flash enables graphics generation without the need for external DRAM On-chip quad SPI flash controller and on-chip DRAM controller can be utilized if additional memory is required Stepper motor capability can be included in the design with on-chip controller 	
Creating an Easy-to- Use Human-Machine Interface (HMI) Application	 TFT LCD controller can drive up to two TFT LCD displays, providing a more feature-rich HMI solution Swell PEG embedded graphics software provides development tool support Dedicated on-chip 1 MB graphics SRAM Digital video inputs are offered in a variety of formats, including RGB666, RGB565, monochrome and YCbCr422 	

Documentation

Freescale Doument Number	Title	Description
PXD20 PB	PXD20 Microcontroller Product Brief	Device family summary

Selector Guide

Product Number	Temp Ranges	Features	Package	Speed
PXD2020	-40°C to +105°C	e200z4 core, 125 MHz, 2 MB flash (ECC), 64 KB RAM (ECC), 1 MB graphics RAM, graphics accelerator, TFT LCD controller, 10-bit 16-ch. ADC, stepper motor controller	176 LQFP,	125 MHz
PXD2020	-40°C to +105°C	e200z4 core, 125 MHz, 2 MB flash (ECC), 64 KB RAM (ECC), 1 MB graphics RAM, graphics accelerator, 2x TFT LCD controllers, 10-bit 20-ch. ADC, stepper motor controller	208 LQFP	125 MHz
PXD2020	-40°C to +105°C	e200z4 core, 125 MHz, 2 MB flash (ECC), 64 KB RAM (ECC), 1 MB graphics RAM, graphics accelerator, 2x TFT LCD controllers, 10-bit 20-ch. ADC, stepper motor controller, DRAM controller	416 MAPBGA	125 MHz

For current information about PXD20 family products and documentation, please visit freescale.com/PXD20 and freescale.com/Tower

Freescale and the Freescale logo are trademarks of Freescale Semiconductor, Inc., Reg. U.S. Pat. & Tm. Off. The Power Architecture and Power.org word marks and the Power and Power.org logos and related marks are trademarks and service marks licensed by Power.org. PEG brand name is a registered trademark of Swell Software LLC in the US Patent and Trademark Office. All other product or service names are the property of their respective owners. © 2012 Freescale Semiconductor, Inc.

Document Number: PXD20FS REV 0

