



RoHS Compliant Product
A suffix of "-C" specifies halogen free

FEATURES

- Low forward voltage drop
- High current capability
- High reliability
- High surge current capability
- Epitaxial construction

MECHANICAL DATA

- Case: Molded plastic
- Epoxy: UL94V-0 rate flame retardant
- Lead: Lead solderable per MIL-STD-202 method 208 guaranteed
- Polarity: As Marked
- Mounting position: Any
- Weight: 1.98 grams (approximate)

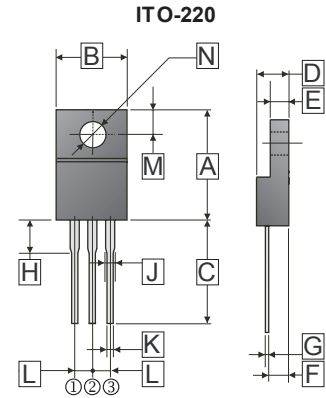

Dimensions in millimeters

REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	15.00	15.60	H	3.00	3.80
B	9.50	10.50	J	0.90	1.50
C	13.00 Min		K	0.50	0.90
D	4.30	4.70	L	2.34	2.74
E	2.50	3.10	M	2.50	2.90
F	2.40	2.80	N	∅ 3.1	∅ 3.4
G	0.30	0.70			

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25°C ambient temperature unless otherwise specified.
Single phase half wave, 60Hz, resistive or inductive load.
For capacitive load, de-rate current by 20%.


TYPE NUMBER	SYMBOL	SBR10100F	UNITS
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	100	V
Working Peak Reverse Voltage	V_{RSM}	100	V
Maximum DC Blocking Voltage	V_{DC}	100	V
Maximum Average Forward Rectified Current	I_F	5	A
Per Leg		10	
Per Device			
Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	130	A
Maximum Instantaneous Forward Voltage	V_F	0.82	V
$I_F = 5\text{ A}, T_A = 25^\circ\text{C}, \text{ per leg}$		0.70	
Maximum DC Reverse Current at Rated DC Blocking Voltage	I_R	0.05	mA
$T_A = 25^\circ\text{C}$		10	
$T_A = 100^\circ\text{C}$			
Typical Junction Capacitance (Note 1)	C_J	350	pF
Typical Thermal Resistance (Note 2)	$R_{\theta JA}$	4.0	$^\circ\text{C}/\text{W}$
	dv/dt	10000	$\text{V}/\mu\text{s}$
Operating Temperature Range T_J	T_J	-50 ~ +150	$^\circ\text{C}$
Storage Temperature Range T_{STG}	T_{STG}	-65 ~ +175	$^\circ\text{C}$

NOTES:


1. Measured at 1MHz and applied reverse voltage of 5.0V D.C.
2. Thermal Resistance Junction to Case.

RATINGS AND CHARACTERISTIC CURVES (SBR10100F)


Typical Forward Current Derating Curve

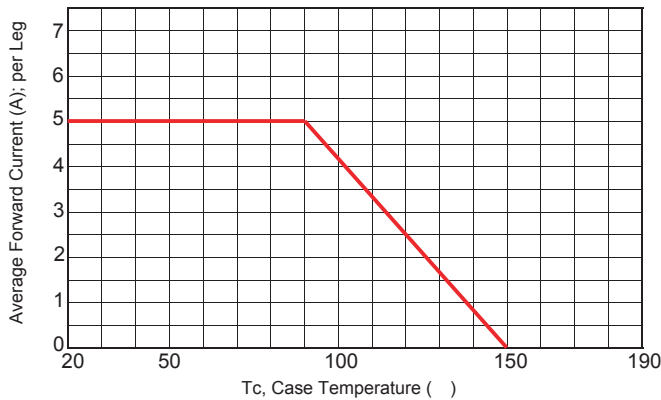


Typical Forward Characteristic

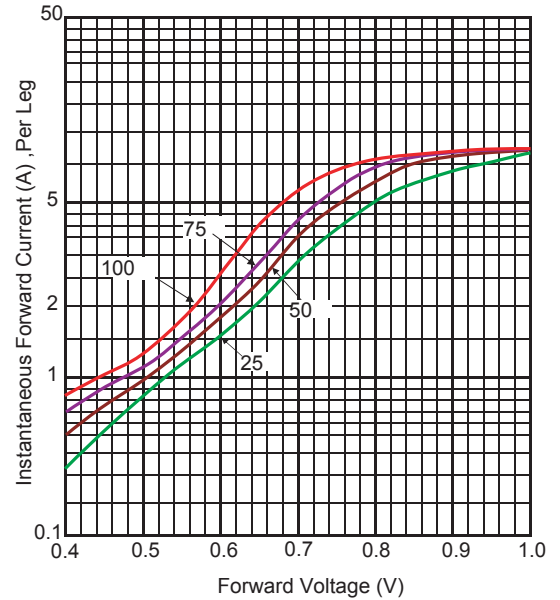

Typical Junction Capacitance

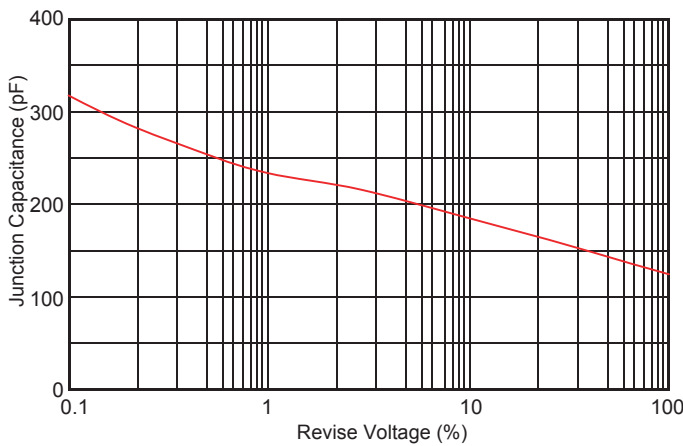

Typical Reverse Characteristic

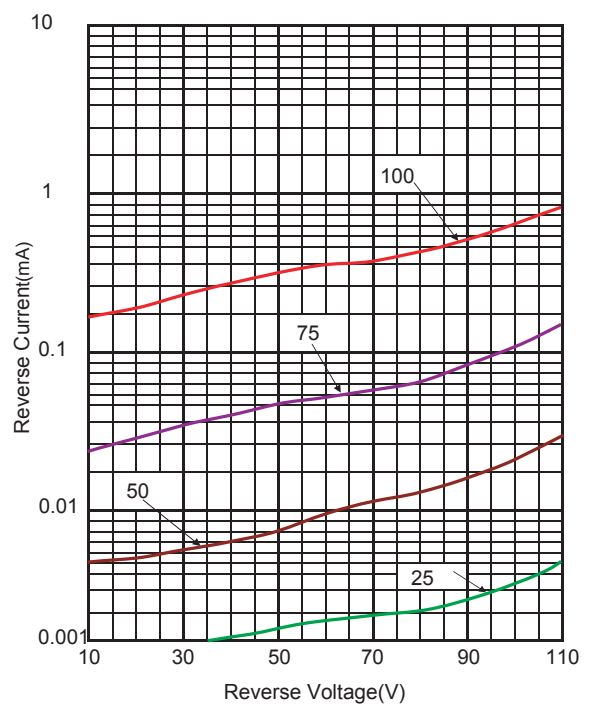

Maximum Non- Repetitive Forward Surge Current

