


CATALOG N <sup>o</sup>	A	B	C	D	E	F
SREC 7 P JT	0.81	0.78	.562			
SREC 11 P JT	0.28	0.78	.531			
SREC 14 P JT	0.28	0.88	.625			
SREC 18 P JT	0.39	0.88	.656			
SREC 20 P JT	0.28	1.06	.84			
SREC 26 P JT	0.28	1.23	1.000			
SREC 34 P JT	0.39	1.23	1.032			
SREC 44 P JT	0.39	1.48	1.267			
SREC 50 P JT	0.39	1.63	1.408			

- SEE NOTE 4 (B)
- MOLDING MALE - DIALYL PHTHALATE MIL-M-14, SDG-F.
  - PIN CONTACT - LEADED COMM L BRONZE GOLD OVER COPPER
  - CLIP - BERYLLIUM COPPER, QQ-C-532 GOLD OVER COPPER FLASH.
  - WASHER - STAINLESS STEEL, QQ-S-762 PASSIVATING DIP.
  - JACKSOCKET - STAINLESS STEEL, QQ-S-763 PASSIVATING DIP.
  - ANODE - STAINLESS STEEL, QQ-S-768 PASSIVATING DIP.
  - GROOVE PIN - CHROME VANADIUM STEEL SAE 6150 CADMIUM PLATE
  - WASHER THURST - STAINLESS STEEL, QQ-S-00269 PASSIVATING DIP.

- NOTES:
- XX INDICATES N<sup>o</sup> OF CONTACTS.
  - CONTACTS WITH CLIP ASSEMBLED ARE NOT INCLUDED WITH CONNECTOR & MUST BE ORDERED SEPARATELY.
  - WHEN 2-56UNC-2 THRD. USE LEG<sup>o</sup>, SPECIFY CATALOG N<sup>o</sup> AND ADD SUFFIX DASH N<sup>o</sup> - 859.
  - 859 NOT AVAILABLE ON SIZE 44.

FACES OF THE "SREC" MOLDINGS

MALE CONTACT NO 4 THRU 50 (FACE OF SIZE IS NOT SHOWN)

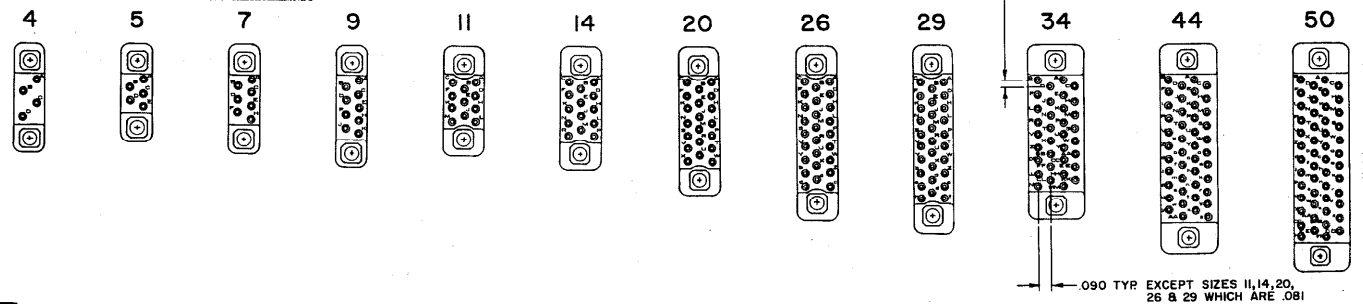

REV	CHANGE	DATE	BY	CHK
A	REVISED - SEE 10-7-68	10-7-68	LD	LD
B	REVISED NOTE 2	11-16-63	LD	LD
C	REVISED NOTE 2	11-16-63	LD	LD

WT. 02

TOLERANCE UNLESS OTHERWISE SPECIFIED: .002, .001, .002 ANGULAR ±

SCALE: ORIGINAL DATE 1-13-66, 4X DATE 7-12-66

WINCHESTER ELECTRONICS, DANVILLE, CONN.

DWG NO. 20908

EN 11142