


Three-Phase Bridge Rectifier, 50A

MTP5008A Thru MTP5016A

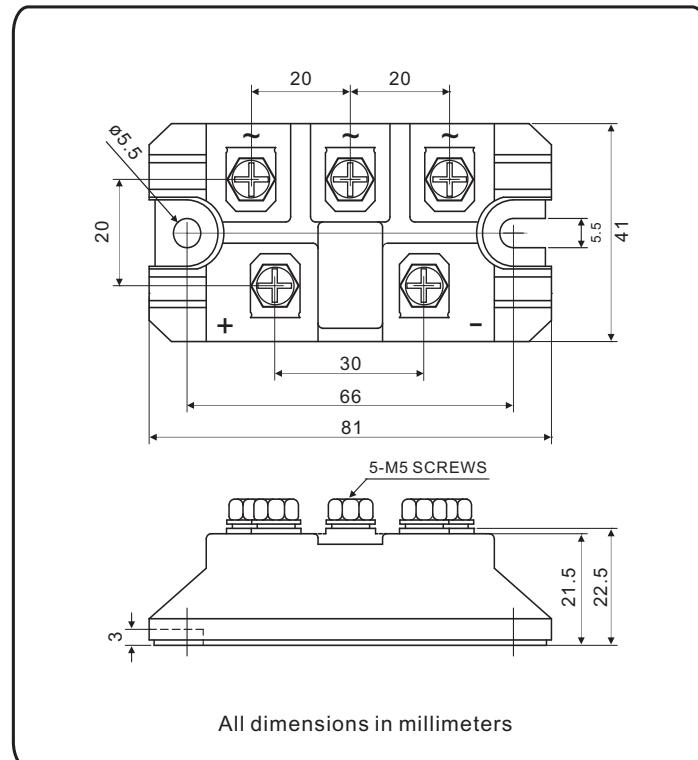


FEATURES

- UL recognition file number E320098
- Typical IR less than 2.0 μA
- High surge current capability
- Low thermal resistance
- Compliant to RoHS
- Isolation voltage up to 2500V



TYPICAL APPLICATIONS

General purpose use in AC/DC bridge full wave rectification for big power supply, field supply for DC motor, industrial automation applications.

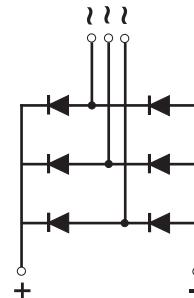

ADVANTAGE

- International standard package
- Epoxy meets UL 94 V-O flammability rating
- Small volume, light weight
- Small thermal resistance
- **Weight:** 195g (6.9 ozs)

PRIMARY CHARACTERISTICS

| | |
|---------------|-----------------|
| $I_{F(AV)}$ | 50A |
| V_{RRM} | 800V to 1800V |
| I_{FSM} | 750A |
| I_R | 5 μA |
| V_F | 1.2V |
| $T_{J \max.}$ | 150°C |

| MAJOR RATINGS AND CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted) | | | | | | |
|--|-------------|------------|------|------|------|------|
| PARAMETER | SYMBOL | MTP50..A | | | | |
| | | 08 | 10 | 12 | 16 | 18 |
| Maximum repetitive peak reverse voltage | V_{RRM} | 800 | 1000 | 1200 | 1600 | 1800 |
| Peak reverse non-repetitive voltage | V_{RSM} | 900 | 1100 | 1300 | 1700 | 1900 |
| Maximum DC blocking voltage | V_{DC} | 800 | 1000 | 1200 | 1600 | 1800 |
| Maximum average forward rectified output current | $I_{F(AV)}$ | 50 | | | | |
| Peak forward surge current single sine-wave superimposed on rated load | I_{FSM} | 750 | | | | |
| Rating (non-repetitive, for t greater than 1 ms and less than 8.3 ms) for fusing | I^2t | 2800 | | | | |
| RMS isolation voltage from case to leads | V_{ISO} | 2500 | | | | |
| Operating junction storage temperature range | T_J | -40 to 150 | | | | |
| Storage temperature range | T_{STG} | -40 to 125 | | | | |

| ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted) | | | | | | | |
|---|---------------------------|--------|----------|----|----|----|----|
| PARAMETER | TEST CONDITIONS | SYMBOL | MTP50..A | | | | |
| | | | 08 | 10 | 12 | 16 | 18 |
| Maximum instantaneous forward drop per diode | $I_F = 50\text{A}$ | V_F | 1.2 | | | | |
| Maximum reverse DC current at rated DC blocking voltage per diod | $T_A = 25^\circ\text{C}$ | I_R | 20 | | | | |
| | $T_A = 150^\circ\text{C}$ | | 4000 | | | | |

| THERMAL AND MECHANICAC ($T_A = 25^\circ\text{C}$ unless otherwise noted) | | | | | | | |
|---|--|-----------------------|----------|----|----|----|----|
| PARAMETER | TEST CONDITIONS | SYMBOL | MTP50..A | | | | |
| | | | 08 | 10 | 12 | 16 | 18 |
| Typical thermal resistance junction to case | Single-side heat dissipation, sine half wave | $R_{\theta JC}^{(1)}$ | 0.3 | | | | |
| Mounting torque to heatsink, M5 $\pm 10\%$ | A mounting compound is recommended and the torque should be rechecked after a period of 3 hours to allow for the spread of the compound. | | 4 | | | | |
| | | | 4 | | | | |
| Approximate weight | | | 195 | | | | |
| | | | g | | | | |

Notes

(1) With heatsink, single side heat dissipation, half sine wave.

(2) M5 screw.

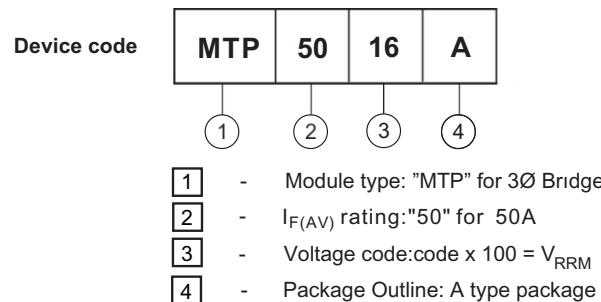
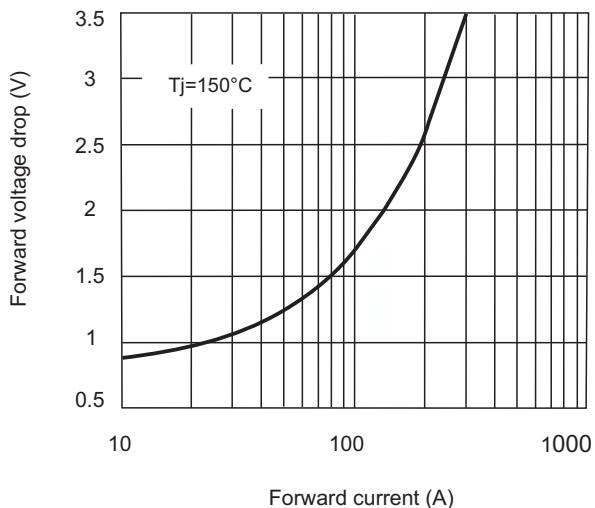
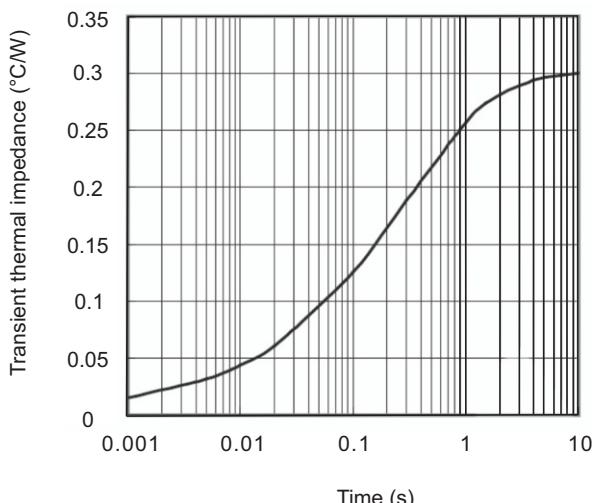
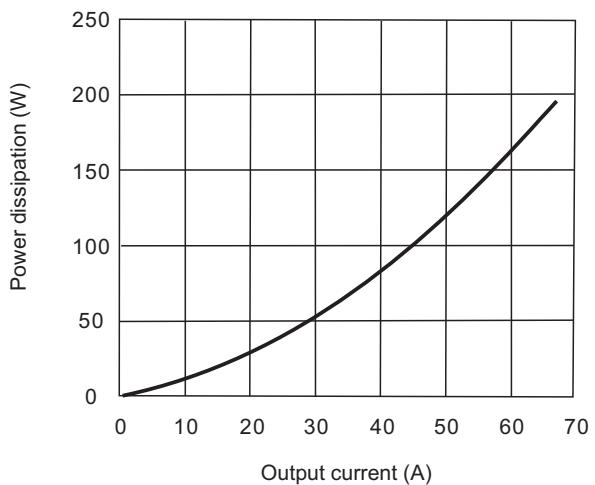
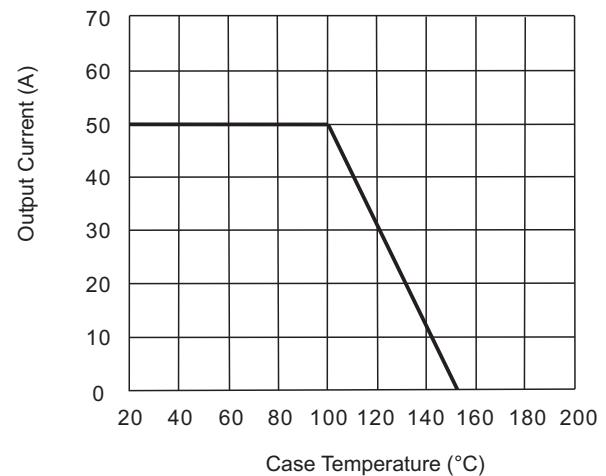
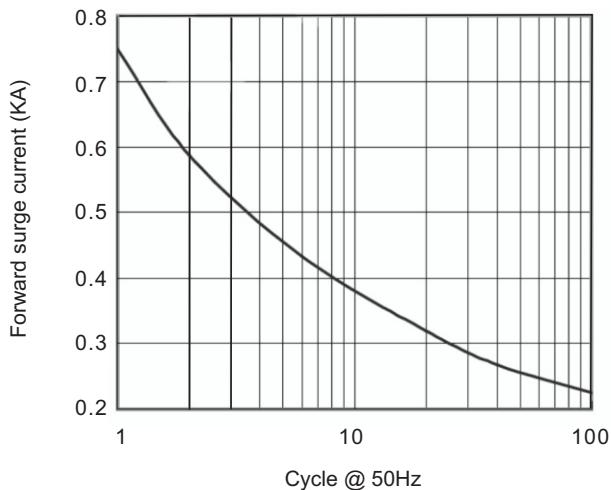


Fig.1 Forward characteristic

Fig.2 Thermal Impedance (junction to case)

Fig.3 Power dissipation vs. output current

Fig.4 Case temperature vs output current

Fig.5 Forward surge current vs. cycle

Fig.6 I^2t characteristic
