


Strip Female Quick Disconnect terminals can boost your production rates. Their "T"-shape carrier, linking each terminal, automatically delivers them into crimping press dies.

Material: Brass


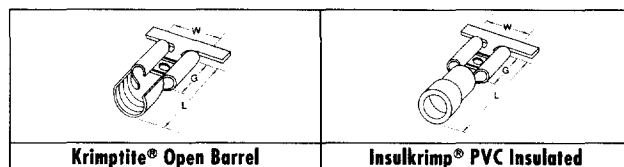


| Tab Size | Wire Range AWG (mm ²) | | Common Dimensions | | Order No. | | Max. Length L | Tin-Plated Order No. | Max. Wire Insulation Dia. | Max. Length L |
|-----------------------------|--------------------------------------|-------------------|-------------------|-------------|------------|------------|------------------|-------------------------|---------------------------------|------------------|
| | Krimptite | Insulkrimp | Max. Width W | Grip G | Brass | Tin-Plated | | | | |
| | | | | | | | | | | |
| 6.30 by 0.80 (.250 by .032) | 16-22 (1.30-0.35) | | 7.60 (.301) | 7.90 (.310) | 19020-0006 | 19020-0010 | 16.70 (.658) | | | |
| | 12-18 (3.30-0.80) | | 7.60 (.301) | 7.90 (.310) | 19020-0013 | 19020-0018 | 16.70 (.658) | | | |
| | | 14-16 (2.00-1.30) | 7.60 (.301) | 7.90 (.310) | | | | 19017-0074 | 3.70 (.145) | 22.00 (.865) |
| | | 12-14 (3.30-2.00) | 7.60 (.301) | 7.90 (.310) | | | | 19017-0107 | 4.40 (.175) | 22.00 (.865) |
| 4.70 by 0.80 (.187 by .032) | 24-26 (0.20-0.12) | | 6.00 (.238) | 6.30 (.250) | 19020-0022 | 19020-0026 | 13.90 (.550) | | | |
| | | 18-22 (0.80-0.35) | 6.00 (.238) | 6.30 (.250) | | | | | 3.40 (.135) | 20.00 (.789) |
| | 16-22 (1.30-0.35) | | 6.00 (.238) | 6.30 (.250) | 19020-0005 | | 14.60 (.573) | | | |
| | 12-18 (3.30-0.80) | | 6.00 (.238) | 6.30 (.250) | 19020-0012 | 19020-0017 | 14.60 (.573) | | | |
| | | 14-16 (2.00-1.30) | 6.00 (.238) | 6.30 (.250) | | | | 19017-0073 | 3.70 (.145) | 20.00 (.789) |
| 4.70 by 0.50 (.187 by .020) | | 12-14 (3.30-2.00) | 6.00 (.238) | 6.30 (.250) | | | | 19017-0059 | 4.40 (.175) | 20.00 (.789) |
| | 24-26 (0.20-0.12) | | 6.00 (.238) | 6.30 (.250) | 19020-0021 | 19020-0025 | 13.90 (.550) | | | |
| | 16-22 (1.30-0.35) | | 6.00 (.238) | 6.30 (.250) | 19020-0004 | 19020-0008 | 14.60 (.573) | | | |
| | 12-18 (3.30-0.80) | | 6.00 (.238) | 6.30 (.250) | 19020-0011 | 19020-0016 | 14.60 (.573) | | | |
| | | 14-16 (2.00-1.30) | 6.00 (.238) | 6.30 (.250) | | | | 19017-0072 | 3.70 (.145) | 20.00 (.789) |
| 2.80 by 0.80 (.110 by .032) | | 12-14 (3.30-2.00) | 6.00 (.238) | 6.30 (.250) | | | | 19017-0083 | 4.40 (.175) | 20.00 (.789) |
| | 22-24 (0.35-0.20) | | 4.10 (.163) | 6.30 (.250) | 19020-0024 | 19020-0028 | 13.50 (.535) | | | |
| | 18-22 (0.80-0.35) | | 4.10 (.163) | 6.30 (.250) | 19020-0039 | 19020-0041 | 14.60 (.573) | | | |
| | 14-16 (2.00-1.30) | 14-16 (2.00-1.30) | 4.10 (.163) | 6.30 (.250) | 19020-0015 | 19020-0020 | 14.60 (.573) | 19017-0071 | 3.70 (.145) | 20.00 (.789) |
| | 22-24 (0.35-0.20) | | 4.10 (.163) | 6.30 (.250) | 19020-0023 | 19020-0027 | 13.50 (.535) | | | |
| 2.80 by 0.50 (.110 by .020) | 18-22 (0.80-0.35) | | 4.10 (.163) | 6.30 (.250) | | | | | | |
| | 14-16 (2.00-1.30) | 14-16 (2.00-1.30) | 4.10 (.163) | 6.30 (.250) | 19020-0014 | 19020-0019 | 14.60 (.573) | 19017-0070 | 3.70 (.145) | 20.00 (.789) |

FEMALE QUICK DISCONNECTS (CONTINUED)





Material: Brass



| Tab Size | Wire Range AWG (mm ²) | | Common Dimensions | | Order No. | | Max. Wire Insulation Dia. | Max. Length L | Tin-Plated Order No. | Max. Wire Insulation Dia. | Max. Length L |
|-----------------------------|-----------------------------------|-------------------|-------------------|-------------|-------------|------------|---------------------------|---------------|----------------------|---------------------------|---------------|
| | Vibrakrimp | Avikrimp | Max. Width W | Grip G | Order No. | | | | | | |
| | | | | | Brass | Tin-Plated | | | | | |
| 6.30 by 0.80 (.250 by .032) | | 18-22 (0.80-0.35) | 7.60 (.301) | 7.90 (.310) | | | | | 19019-0020 | 2.90 (.115) | 22.00 (.865) |
| | 16-22 (1.30-0.35) | | 7.60 (.301) | 7.90 (.310) | 19021-0003 | 19021-0010 | 3.70 (.145) | 20.40 (.802) | | | |
| | 12-18 (3.30-0.80) | | 7.60 (.301) | 7.90 (.310) | 19021-0017 | 19021-0024 | 4.60 (.180) | 20.40 (.802) | | | |
| | | 14-16 (2.00-1.30) | | | | | | | 19019-0036 | 3.50 (.138) | 22.00 (.865) |
| | | 12-14 (3.60-1.90) | | 7.60 (.301) | 7.90 (.310) | | | | 19019-0057 | 4.30 (.170) | 22.00 (.865) |
| 4.70 by 0.80 (.187 by .032) | 24-26 (0.20-0.12) | 24-26 (0.20-0.12) | 6.00 (.238) | 6.30 (.250) | 19021-0030 | 19021-0034 | 2.40 (.095) | 17.50 (.690) | 19019-0083 | 1.80 (.072) | 17.60 (.694) |
| | | 18-22 (0.80-0.35) | 6.00 (.238) | 6.30 (.250) | | | | | 19019-0019 | 2.90 (.115) | 20.00 (.789) |
| | 16-22 (1.30-0.35) | | 6.00 (.238) | 6.30 (.250) | 19021-0002 | 19021-0009 | 3.70 (.145) | 18.20 (.717) | | | |
| | 12-18 (3.30-0.80) | | 6.00 (.238) | 6.30 (.250) | 19021-0016 | 19021-0023 | 4.60 (.180) | 18.20 (.717) | | | |
| | | 14-16 (2.00-1.30) | | 6.00 (.238) | 6.30 (.250) | | | | 19019-0080 | 3.50 (.138) | 20.00 (.789) |
| 4.70 by 0.50 (.187 by .020) | 24-26 (0.20-0.12) | 24-26 (0.20-0.12) | 6.00 (.238) | 6.30 (.250) | 19021-0029 | 19021-0033 | 2.40 (.095) | 17.50 (.690) | 19019-0082 | 1.80 (.072) | 17.60 (.694) |
| | 16-22 (1.30-0.35) | | 6.00 (.238) | 6.30 (.250) | 19021-0001 | 19021-0008 | 3.70 (.145) | 18.20 (.717) | | | |
| | 12-18 (3.30-0.80) | | 6.00 (.238) | 6.30 (.250) | 19021-0015 | 19021-0022 | 4.60 (.180) | 18.20 (.717) | | | |
| | | 14-16 (2.00-1.30) | | 6.00 (.238) | 6.30 (.250) | | | | 19019-0079 | 3.60 (.142) | 20.00 (.789) |
| | | 12-14 (3.30-2.00) | | 6.00 (.238) | 6.30 (.250) | | | | 19019-0055 | 4.30 (.170) | 20.00 (.789) |
| 5.20 by 0.80 (.205 by .032) | 16-22 (1.30-0.35) | | 6.30 (.250) | 6.30 (.250) | 19021-0007 | 19021-0037 | 3.70 (.145) | 18.20 (.717) | | | |
| | 12-18 (3.30-0.80) | | 6.30 (.250) | 6.30 (.250) | 19021-0021 | 19021-0028 | 4.60 (.180) | 18.20 (.717) | | | |
| 5.20 by 0.50 (.205 by .020) | 16-22 (1.30-0.35) | | 6.30 (.250) | 6.30 (.250) | 19021-0014 | 19021-0014 | 3.70 (.145) | 18.20 (.717) | | | |
| | 12-18 (3.30-0.80) | | 6.30 (.250) | 6.30 (.250) | 19021-0020 | 19021-0027 | 4.60 (.180) | 18.20 (.717) | | | |
| 2.80 by 0.80 (.110 by .032) | 22-24 (0.35-0.20) | 24-26 (0.20-0.12) | 4.10 (.163) | 6.30 (.250) | 19021-0032 | 19018-0077 | 2.40 (.095) | 17.50 (.690) | 19019-0081 | 1.80 (.072) | 17.60 (.694) |
| | 18-22 (0.80-0.35) | 18-22 (0.80-0.35) | 4.10 (.163) | 6.30 (.250) | 19021-0005 | 19021-0036 | 3.20 (.125) | 18.20 (.717) | 19019-0075 | 2.90 (.115) | 20.00 (.789) |
| | 14-16 (2.00-1.30) | | 4.10 (.163) | 6.30 (.250) | 19021-0019 | 19021-0026 | 3.70 (.145) | 18.20 (.717) | | | |
| 2.80 by 0.50 (.110 by .020) | 22-24 (0.35-0.20) | 24-26 (0.20-0.12) | 4.10 (.163) | 6.30 (.250) | 19021-0031 | 19018-0076 | 2.40 (.095) | 17.50 (.690) | 19019-0047 | 1.80 (.072) | 17.60 (.694) |
| | 18-22 (0.80-0.35) | | 4.10 (.163) | 6.30 (.250) | | 19021-0011 | 3.20 (.125) | 18.20 (.717) | | | |
| | 14-16 (2.00-1.30) | | 4.10 (.163) | 6.30 (.250) | 19021-0018 | 19021-0025 | 3.70 (.145) | 18.20 (.717) | | | |

FLAG QUICK DISCONNECTS

Material: Brass



| Tab Size | Wire Range AWG (mm ²) | Order No. | Krimptite (Uninsulated) | | | | Vibrakrimp (with Wire Grip) | | | | | |
|-----------------------------|-----------------------------------|------------|-------------------------|-------------|-------------|-------------|-----------------------------|--------------|-------------|-------------|-------------|-----------------------|
| | | | A Max. | B Max. | C Ref. | D | Order No. | A Max. | B Max. | C Ref. | D | Max. Wire Insul. Dia. |
| 6.30 by 0.80 (.250 by .032) | 18-22 (0.80-0.35) | 19008-0013 | 14.30 (.562) | 8.10 (.321) | 2.00 (.079) | 7.70 (.305) | 19009-0007 | 15.10 (.594) | 9.80 (.385) | 2.00 (.079) | 7.70 (.305) | 3.40 (.135) |
| 4.70 by 0.80 (.187 by .032) | 18-22 (0.80-0.35) | 19008-0009 | 14.30 (.562) | 8.10 (.321) | 2.00 (.079) | 7.70 (.305) | 19009-0009 | 15.10 (.594) | 9.80 (.385) | 2.00 (.079) | 7.70 (.305) | 3.40 (.135) |
| 4.70 by 0.50 (.187 by .020) | 18-22 (0.80-0.35) | 19008-0008 | 14.30 (.562) | 8.10 (.321) | 1.00 (.040) | 6.30 (.250) | 19009-0008 | 15.10 (.594) | 9.80 (.385) | 1.00 (.040) | 6.30 (.250) | 3.40 (.135) |
| 6.30 by 0.80 (.250 by .032) | 14-16 (2.00-1.30) | 19008-0031 | 14.30 (.562) | 8.10 (.321) | 1.00 (.040) | 6.30 (.250) | 19009-0016 | 15.10 (.594) | 9.80 (.385) | 1.00 (.040) | 6.30 (.250) | 3.70 (.145) |
| 4.70 by 0.80 (.187 by .032) | 14-16 (2.00-1.30) | 19008-0029 | 14.30 (.562) | 8.10 (.321) | 1.00 (.040) | 6.30 (.250) | 19009-0018 | 15.10 (.594) | 9.80 (.385) | 1.00 (.040) | 6.30 (.250) | 3.70 (.145) |
| 4.70 by 0.50 (.187 by .020) | 14-16 (2.00-1.30) | 19008-0028 | 14.30 (.562) | 8.10 (.321) | 1.00 (.040) | 6.30 (.250) | 19009-0017 | 15.10 (.594) | 9.80 (.385) | 1.00 (.040) | 6.30 (.250) | 3.70 (.145) |