

# "High Frequency Ceramic Solutions"

## 5.5 GHz Band Pass Filter

P/N 5515BP15B975

Detail Specification 04/24/03

Page 1 of 2


### General Specifications

<b>Part Number</b>	5515BP15B975
<b>Frequency (MHz)</b>	4900~5875
<b>Insertion Loss</b>	1.5 dB max.
<b>Return Loss</b>	9.5 dB min.
<b>Attenuation (min.)</b>	30 dB @ 3500 MHz

<b>Input Power</b>	500mW max.
<b>Impedance</b>	50 Ω
<b>Operating Temperature</b>	-40 to +85°C
<b>Reel Quantity</b>	4,000


### Terminal Configuration

No.	Function
1	GND
2	OUT
3	GND
4	IN



### Mechanical Dimensions

	In	mm
<b>L</b>	0.079 ± 0.006	2.00 ± 0.15
<b>W</b>	0.049 ± 0.004	1.25 ± 0.10
<b>T</b>	0.037 ± 0.004	0.95 ± 0.10
<b>a</b>	0.051 ± 0.006	1.30 ± 0.15
<b>b</b>	0.012 ± 0.006	0.30 ± 0.15
<b>c</b>	0.010 ± 0.006	0.25 ± 0.15
<b>d</b>	0.014 ± 0.006	0.35 ± 0.15

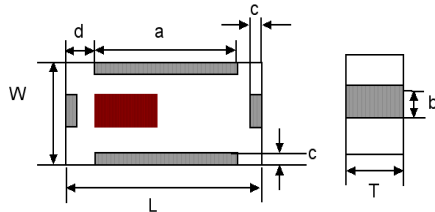


### Mounting Considerations

Mount these devices with brown mark facing up.

Line width should be designed to provide 50Ω impedance matching characteristics.

Units: mm

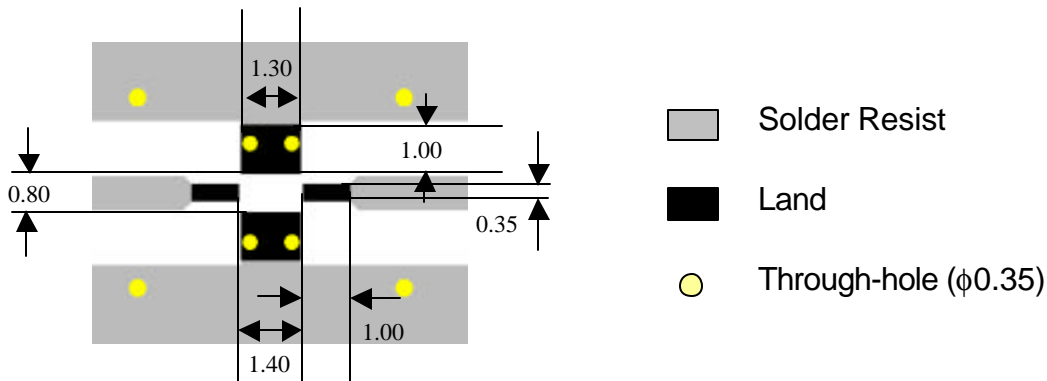

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



[www.johansontechnology.com](http://www.johansontechnology.com)

931 Via Alondra • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

©2003 Johanson Technology, Inc. All rights reserved.

# "High Frequency Ceramic Solutions"


**5.5 GHz Band Pass Filter**

**P/N 5515BP15B975**

Detail Specification 04/24/03

Page 2 of 2

**Typical Electrical Performance (T=25°C)**

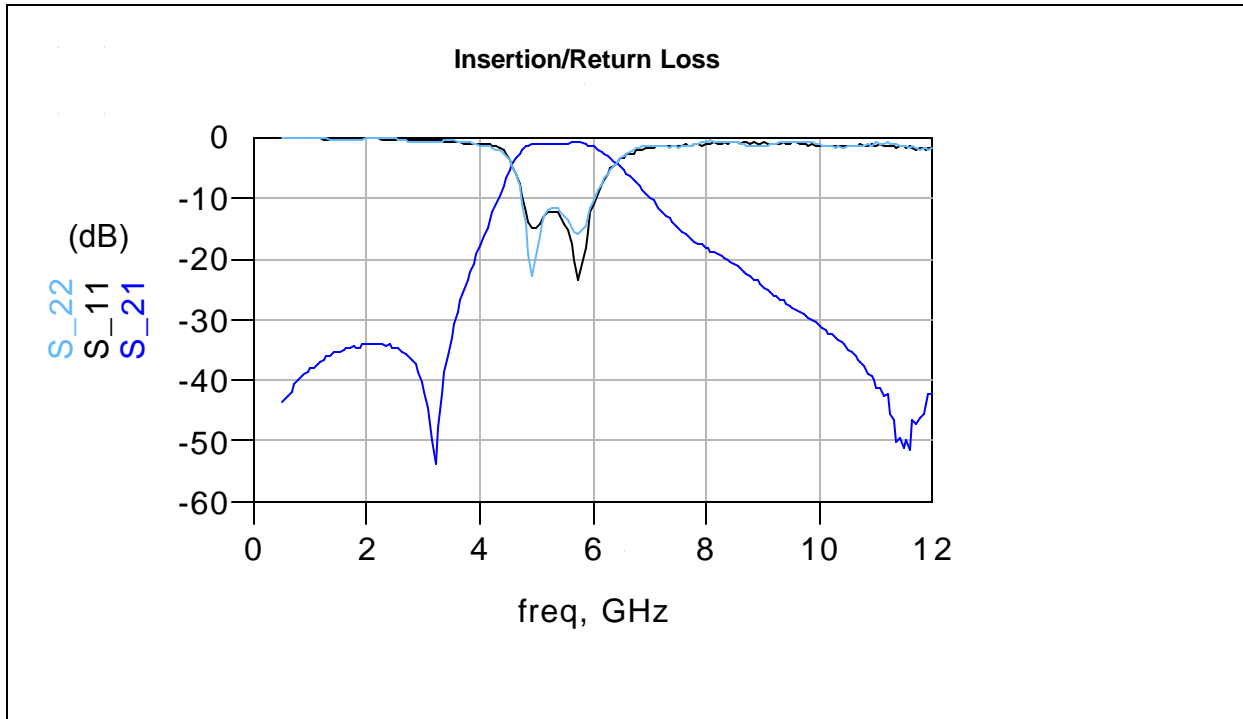

Johanson Technology, Inc. reserves the right to make design changes without notice.  
All sales are subject to Johanson Technology, Inc. terms and conditions.



[www.johansontechnology.com](http://www.johansontechnology.com)

931 Via Alondra • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

©2003 Johanson Technology, Inc. All rights reserved.