CAD GENERATED DRAWING - NO PENCIL CHANGES ALLOWED

PART NUMBER	CURRENT RATING (A)	BODY COLOR	RATED VOLTAGE
0293020.MXJ	20	LIGHT BLUE	32V
0293030.MXJ	30	PINK	
0293040.MXJ	40	GREEN	
0293050.MXJ	50	RED	
0293060.MXJ	60	YELLOW	
0293070.MXJ	70	BROWN	
0293080.MXJ	80	BLACK	
0293100.MXJ	100	BLUE	





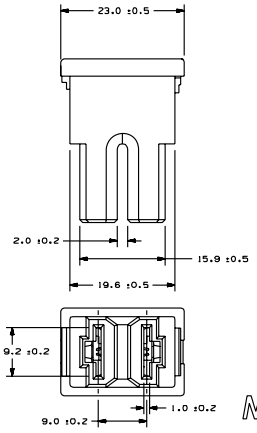

% OF RATED CURRENT	OPENING TIME	
	MIN	MAX
110%	14,400 SEC.	-
200%	5 SEC.	100 SEC.
350%	0.2 SEC.	7 SEC.
600%	0.04 SEC.	1 SEC.

METRIC

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS.
DIMENSIONS IN BRACKETS [ ] ARE INCHES.
UNLESS NOTED AS SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.

CPK — DENOTES CRITICAL CHARACTERISTICS - MINIMUM CPK VALUE

DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. REFER TO APPLICABLE PROCESS PROCEDURE FOR MEASUREMENT AND FREQUENCY REQUIREMENTS.

CP — DENOTES CP DIMENSIONS - MINIMUM CP VALUE
THESE ARE MEASURED DURING INITIAL RUN OFF AS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE

NO	COMPONENT NO	DESCRIPTION	QTY/M	U/M

BILL OF MATERIAL

MATL SPEC

FINISH

COPIES TO: 1 9 18 / 2 10 19 / 3 12 20 / 4 13 21 / 5 14 23 / 6 15 33 / 7 16 43 / 8 17 53

LTR	DATE	REVISION	CHK	APD
A	08/14/09	0007628ER-RELEASE GMB		
B	03/29/10	SA2011-RELEASE 0293070.MXJ 0293080.MXJ 0293100.MXJ GMB		

DRWN GMB DATE 08/14/09 — SCALE 2:1
CHK SUPER DR DATE
APPD FINISH GOOD WT GRAMS/PIECE DATE

TOLERANCE UNLESS OTHERWISE SPECIFIED
ONE PLACE DEC +/-.1 — THREE PLACE DEC +/-.010
TWO PLACE DEC +/-.25 — ANGULAR +/-1°

3RD ANGLE PROJECTION

TITLE: SLOW BLOW FUSE AS TYPE

littelfuse — DES PLAINES, ILLINOIS 60018

REVISION: B — DRWG. NO.: OL-0293000.MXJ — OUTLINE