




Coaxial Cable Assemblies and Breakouts

Pomona®



Cable length is measured from the inside edges of the connectors.
All dimensions are in inches unless otherwise noted.

Coaxial Cable Assemblies and Breakouts

DOUBLE BANANA PLUG WITH SAFETY SHROUDS

Fits Digital Multi-meters and other instruments.



Pomona
ACCESS

90916



Part No.	Length	PRICE
6283-C-12	12"	12.50
6283-C-24	24"	12.50
6283-C-36	36"	12.50
6283-C-48	48"	13.10
6283-C-60	60"	13.70

Offset design designates hot and ground leads
Black and red banana plug shrouds
Molded strain relief for long life
Fits most DMM and other instruments with shrouded jacks
MIL spec coaxial cable
Overvoltage CAT II, 600V, 5A per IEC1010-2-031

MULTI-STACKING DOUBLE BANANA PLUG CABLES

Pomona
ACCESS


90565



Part No.	Cable Type	Length	PRICE
2BA-18	Two Conductor Twisted	18"	13.75
2BA-24	Pair, 18 AWG, .250" O.D.	24"	13.75
2BA-36		36"	13.75
2BA-48		48"	15.25
2BA-60		60"	15.25
2BC-18	RG58C/U, .195" O.D.	18"	12.90
2BC-24		24"	12.90
2BC-36		36"	12.90
2BC-48		48"	13.95
2BC-60		60"	13.95

RATING: 1400 VRMS: +50°C (+131°F) Max.

MULTI-STACKING DOUBLE BANANA PLUGS ON RETRACTILE (COILED) CORD



Pomona
ACCESS

90587

Part No.	Extended Length	PRICE
3864-48	48"	25.20
3864-60	60"	25.20
3864-72	72"	26.25

RATING: 270VDC/90 VAC, +50°C (+122°F) Max.
CABLE TYPE: Shielded Microphone Cable

MULTI-STACKING DOUBLE BANANA PLUG, ONE END ONLY

Pomona
ACCESS


90503



Part No.	Cable Type	Length	PRICE
1326-A-60	Two Conductor Twisted Pair, 18AWG, .250" O.D.	60"	11.50
1326-C-60	RG58C/U, .195" O.D.	60"	11.50

RATING: +55°C (+131°F) Max.

MULTI-STACKING DOUBLE TO MULTI-STACKING SINGLE BANANA PLUGS




Pomona
ACCESS

90539

Part No.	Length	PRICE
1368-A-18	18"	21.40
1368-A-24	24"	21.40
1368-A-30	30"	21.40
1368-A-36	36"	21.40
1368-A-48	48"	22.45
1368-A-60	60"	22.45

RATING: 300 VRMS, +50°C (+122°F) Max.
CABLE TYPE: Two Conductor Twisted Pair, 18 AWG, .250" O.D.

DOUBLE BANANA PLUG TO STACKING PIN TIP PLUGS

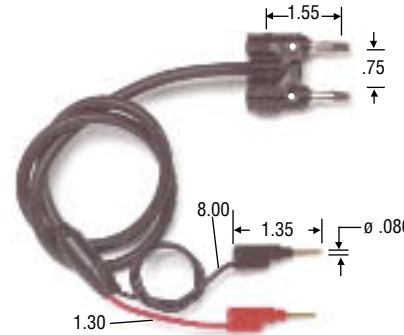


Pomona
ACCESS

90568

Part No.	Length	PRICE
2BC-PP-18	18"	18.65
2BC-PP-24	24"	18.65
2BC-PP-36	36"	18.65
2BC-PP-48	48"	19.95
2BC-PP-60	60"	19.95

CABLE TYPE: RG58C/U, .195" O.D.

TWO CONDUCTOR SHIELDED BALANCED LINE



Pomona
ACCESS

90495

Part No.	Length	PRICE
1167-18	18"	27.85
1167-24	24"	27.85
1167-30	30"	27.85
1167-36	36"	27.85
1167-48	48"	29.10
1167-60	60"	29.10

RATING: 1000 VRMS, +55°C (+131°F) Max.
CABLE TYPE: Two Conductor Shielded Twisted Pair, .231" O.D.

MULTI-STACKING BANANA PLUGS, TWO EACH END



Pomona
ACCESS

90553

Part No.	Length	PRICE
2239-C-24	24"	24.15
2239-C-36	36"	24.15
2239-C-48	48"	25.20
2239-C-60	60"	25.20

RATING: 1400 VRMS, +55°C (+131°F) Max.
CABLE TYPE: RG58C/U, .195" O.D.

See chart on page 32 for additional cable specifications.

Pomona Electronics

Sales: (909) 469-2900 FAX: (909) 629-3317 Tech. Support: (800) 241-2060
© 2001 Pomona Electronics. Specifications and prices subject to change without notice. Printed in U.S.A.

www.pomonaelectronics.com