



DS55114/DS75114 Dual Differential Line Drivers


General Description

The DS55114/DS75114 dual differential line drivers are designed to provide differential output signals with high current capability for driving balanced lines, such as twisted pair at normal line impedances, without high power dissipation. The output stages are similar to TTL totem-pole outputs, but with the sink outputs, YS and ZS, and the corresponding active pull-up terminals, YP and ZP, available on adjacent package pins. Since the output stages provide TTL compatible output levels, these devices may also be used as TTL expanders or phase splitters.

Features

- Each circuit offers a choice of open-collector or active pull-up (totem-pole) outputs
- Single 5V supply
- Differential line operation
- Dual channels
- TTL/LS compatibility
- Designed to be interchangeable with Fairchild 9614 line drivers
- Short-circuit protection of outputs
- High current outputs
- Clamp diodes at inputs and outputs to terminate line transients
- Single-ended or differential AND/NAND outputs
- Triple inputs

Connection Diagram

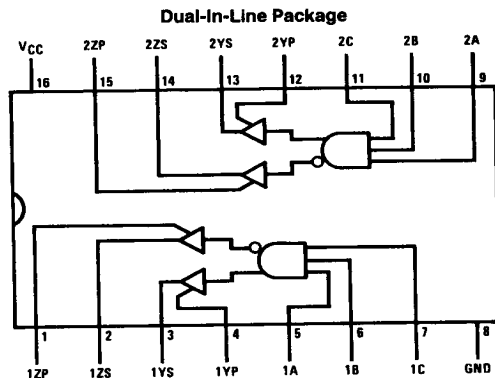

TL/F/5786-1

Top View

Positive logic: Y = ABC

Z = $\overline{ABC}$

Order Number DS75114N
See NS Package Number N16A

*Contact Product Marketing

Truth Table

Inputs			Outputs	
A	B	C	Y	Z
H	H	H	H	L
All Other Input Combinations			L	H

H = high level

L = low level

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Supply Voltage (V_{CC})	7V
Input Voltage	5.5V
OFF-State Voltage Applied to Open-Collector Outputs	12V
Maximum Power Dissipation* at 25°C	
Cavity Package	1433 mW
Molded Package	1362 mW
Operating Free-Air Temperature Range	
DS55114	-55°C to +125°C
DS75114	0°C to +70°C
Storage Temperature Range	-65°C to +150°C
Lead Temperature ($1/16"$ from case for 60 seconds): J Package	300°C

Lead Temperature ($1/16"$ from case for 4 seconds): N Package

260°C

*Derate cavity package 9.6 mW/°C above 25°C; derate molded package 10.9 mW/°C above 25°C (Note 2).

Operating Conditions

	Min	Max	Units
Supply Voltage (V_{CC})			
DS55114	4.5	5.5	V
DS75114	4.75	5.25	V
High Level Output Current (I_{OH})		-40	mA
Low Level Output Current (I_{OL})		40	mA
Operating Free-Air Temperature (T_A)			
DS55114	-55	125	°C
DS75114	0	70	°C

Electrical Characteristics Over recommended operating free-air temperature range (unless otherwise noted)

Symbol	Parameter	Conditions (Note 3)	DS55114			DS75114			Units
			Min	Typ (Note 4)	Max	Min	Typ (Note 4)	Max	
V_{IH}	High Level Input Voltage		2			2			V
V_{IL}	Low Level Input Voltage				0.8			0.8	V
V_{IK}	Input Clamp Voltage	$V_{CC} = \text{Min}, I_I = -12 \text{ mA}$		-0.9	-1.5		-0.9	-1.5	V
V_{OH}	High Level Output Voltage	$V_{CC} = \text{Min}, V_{IH} = 2V$ $I_{OH} = -10 \text{ mA}$	2.4	3.4		2.4	3.4		V
		$V_{IL} = 0.8V$ $I_{OH} = -40 \text{ mA}$	2	3.0		2	3.0		V
V_{OL}	Low Level Output Voltage	$V_{CC} = \text{Min}, V_{IH} = 2V, V_{IL} = 0.8V,$ $I_{OL} = 40 \text{ mA}$		0.2	0.4		0.2	0.45	V
V_{OK}	Output Clamp Voltage	$V_{CC} = 5V, I_O = 40 \text{ mA}, T_A = 25^\circ\text{C}$		6.1	6.5		6.1	6.5	V
		$V_{CC} = \text{Max}, I_O = -40 \text{ mA}, T_A = 25^\circ\text{C}$		-1.1	-1.5		-1.1	-1.5	V
$I_{O(\text{off})}$	OFF-State Open-Collector Output Current	$V_{CC} = \text{Max}$ $V_{OH} = 12V$ $T_A = 25^\circ$		1	100				μA
		$T_A = 125^\circ\text{C}$			200				μA
		$V_{OH} = 5.25V$ $T_A = 25^\circ\text{C}$					1	100	μA
		$T_A = 70^\circ\text{C}$						200	μA
I_I	Input Current at Maximum Input Voltage	$V_{CC} = \text{Max}, V_I = 5.5V$			1			1	mA
I_{IH}	High Level Input Current	$V_{CC} = \text{Max}, V_I = 2.4V$			40			40	μA
I_{IL}	Low Level Input Current	$V_{CC} = \text{Max}, V_I = 0.4V$		-1.1	-1.6		-1.1	-1.6	mA
I_{OS}	Short-Circuit Output Current (Note 5)	$V_{CC} = \text{Max}, V_O = 0V$	-40	-90	-120	-40	-90	-120	mA
I_{CC}	Supply Current (Both Drivers)	Inputs Grounded, No Load, $T_A = 25^\circ\text{C}$ $V_{CC} = \text{Max}$		37	50		37	50	mA
		$V_{CC} = 7V$		47	65		47	70	mA

Note 1: All voltage values are with respect to network ground terminal.

Note 2: For operation above 25°C free-air temperature, refer to Dissipation Derating Curves in the Thermal information section.

Note 3: All parameters, with the exception of OFF-state open-collector output current, are measured with the active pull-up connected to the sink output.


Note 4: All typical values are at $T_A = 25^\circ\text{C}$ and $V_{CC} = 5V$, with the exception of I_{CC} at 7V.

Note 5: Only one output should be shorted at a time, and duration of the short-circuit should not exceed one second.

Switching Characteristics $V_{CC} = 5V, T_A = 25^\circ C$

Symbol	Parameter	Conditions	DS55114			DS75114			Units
			Min	Typ	Max	Min	Typ	Max	
t_{PLH}	Propagation Delay Time, Low-to-High-Level Output	$C_L = 30\text{ pF}$, (Figure 1)		15	20		15	30	ns
t_{PHL}	Propagation Delay Time High-to-Low-Level Output			11	20		11	30	ns

AC Test Circuit and Switching Time Waveforms

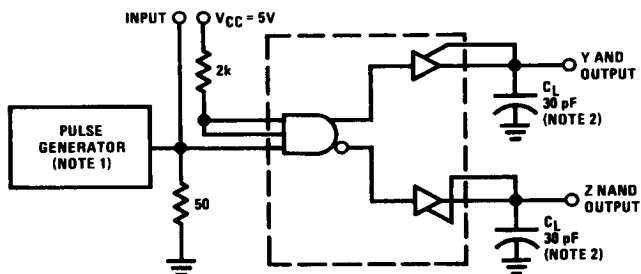

TL/F/5786-3

Note 1: The pulse generator has the following characteristics: $Z_{OUT} = 50\Omega$, $t_w = 100\text{ ns}$, $PRR = 500\text{ kHz}$.

Note 2: C_L includes probe and jig capacitance.










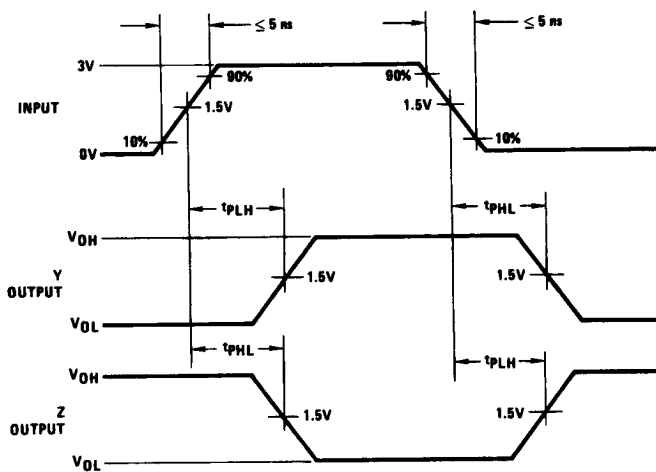


FIGURE 1

TL/F/5786-4

Typical Performance Characteristics*



*Data for temperatures below 0°C and above 70°C and for supply voltages below 4.75V and above 5.25V are applicable to DS55114 circuits only. These parameters were measured with the active pull-up connected to the sink output.

TL/F/5786-7

Schematic Diagram (Each Driver)

