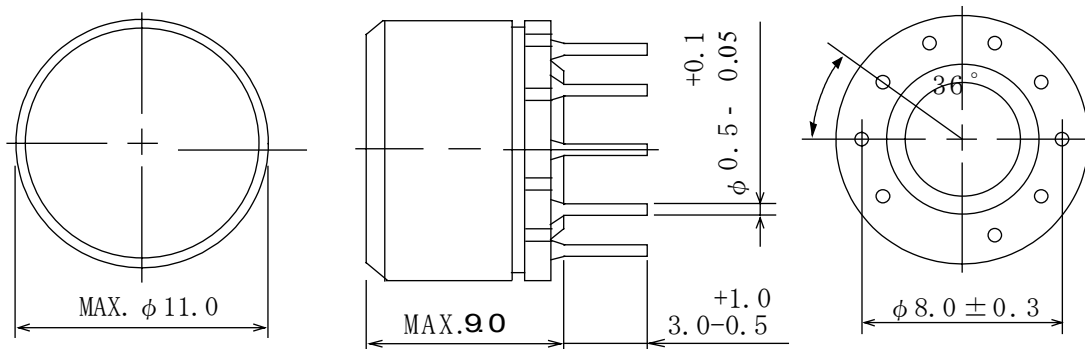



Type: MC-100U
◆ Product Description

- ϕ 11.0mm Max.(L×W), 9.0 mm Max. (Height)
- In addition to the typical versions of parameters shown here, custom parameters are available to meet your exact requirements.


◆ Feature

- Magnetically shielded construction.
- Max. Operating frequency 500kHz,
Max. Operating Power 2.1W(500kHz),1.2W(300kHz),0.42W(100kHz).
- Ideally used in Security camera, Drive for fluorescent display tube.
- RoHS Compliance

◆ Dimensions (mm)

◆ Schematics (Bottom)


“S” indicates winding start.

◆ Specification

Sample No.	Inductance (6-7) 1kHz/1V	D.C.R. (1-2)	D.C.R. (4-5)
0320-T002	480 μ H \pm 30%	65m Ω Max.	78m Ω Max.