



A Dimensions: [mm]
















Scale - 3:1

B Land Pattern: [mm]



C Schematic:





WÜRTH ELEKTRONIK

D Electrical Properties:

| Properties | Test conditions | | Value | Unit | Tol. |
|-------------------------|-----------------|------------------|--------|--------|----------|
| Inductance | 100 kHz/ 10 mV | L | 3x 100 | μН | +50/-30% |
| Impendance | | Z _{max} | 5000 | Ω | typ. |
| Rated Current | ΔT = 40 K | I_{R} | 450 | mA | max. |
| DC Resistance | | R _{DC} | 0.45 | Ω | max. |
| Insulation Test Voltage | | U _T | 500 | V (AC) | max. |
| Rated Voltage | | U _R | 80 | V | max. |

E General information:

It is recommended that the temperature of the part does not exceed 125°C under worst case operating conditions.

Ambient temperature: -40° C to $+85^{\circ}$ C (refering to I_R)

Operating temperature: -40°C to +125°C

Storage temperature (on tape & reel): -20°C to +40°C; 75% RH max.

Test conditions of Electrical Properties: 20°C, 33% RH

if not specified differently

WE-SL3 SMD Common Mode Line Filter

Order.- No.

DESCRIPTION


744253101




SIZE A4




F Typical Impedance Characteristics:

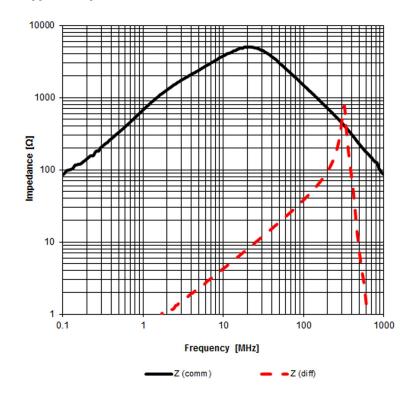

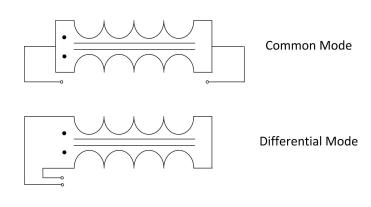


| | | | | Projection Projection | | DESCRIPTION | | | | | |
|-----|--------------------------|------------|---------|-----------------------------------------------------------------------|------------|------------------------------------|--|--|--|--|--|
| | | | | Würth Elektronik eiSos GmbH | H & Co. KG | WE-SL3 SMD Common Mode Line Filter | | | | | |
| 2.1 | 2012-07-17 | SSt | SSt | EMC & Inductive Solutions Max-Eyth-Str. 1 74638 Waldenburg Germany | | Order No. | | | | | |
| 2.0 | 2012-07-17 2006-09-06 | SSt MST | SBa | Tel. +49 (0) 79 42 945 - 0 www.we-online.com | | 744253101 ROHS&REACH | | | | | |
| REV | DATE | BY | CHECKED | eiSos@we-online.com | | | | | | | |

G Packaging Specification: [mm]

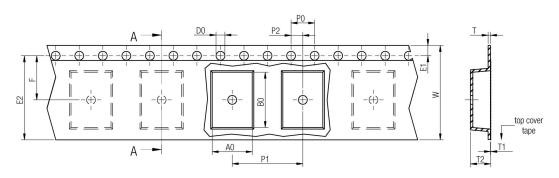


| | | Α0 | В0 | w | P1 | т | T1 | Т2 | D0 | E1 | E2 | F | P0 | P2 | Tape | VPE / packaging unit |
|------|-----------|------|------|--------------|-------|-------|------|------|--------------|-------|-------|--------|-------|--------|-------------|----------------------------|
| | tolerance | typ. | typ. | +0,3 -0,1 | ± 0,1 | ± 0,1 | max. | typ. | +0,1 -0,0 | ± 0,1 | min. | ± 0,05 | ± 0,1 | ± 0,05 | | |
| size | 74425xxx | 6,80 | 9,40 | 16,00 | 12,00 | 0,40 | 0,10 | 3,40 | 1,50 | 1,75 | 14,25 | 7,50 | 4,00 | 2,00 | Polystyrene | 1500 |

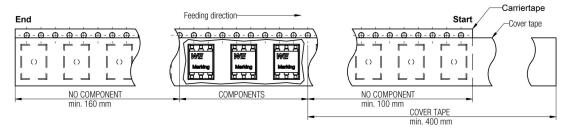


Packaging is referred to the international standard IEC 60286 -3:2007





| | | Α | В | С | D | N | W1 | W2 | W3 | W3 |
|------------|-------|--------|------|-------|-------|--------|-------|-------|-------|-------|
| tolerance | | ± 2,0 | min. | ± 0,8 | min. | min. | + 1,5 | max. | min. | max. |
| Tape width | 16 mm | 330,00 | 1,50 | 13,00 | 20,20 | 100,00 | 16,40 | 22,40 | 15,90 | 19,40 |



| referred to the international standard IEC 60286 -3:2007 | | | | | | |
|----------------------------------------------------------|-----|------------|-----|---------|--------------------------------------------------------------|--------|
| 165° - 185° | | | | | Projection - | |
| | | | | | Würth Elektronik eiSos GmbH & C EMC & Inductive Solutions | Co. KG |
| | 2.1 | 2012-07-17 | SSt | SSt | Max-Eyth-Str. 1 74638 Waldenburg | |
| | 2.0 | 2012-07-17 | SSt | SBa | Germany Tel. +49 (0) 79 42 945 - 0 | |
| Pull-of force Tape width 16 mm 0,1 N - 1,3 N | 1.0 | 2006-09-06 | MST | | www.we-online.com eiSos@we-online.com | |
| 10 mm 0,114 = 1,014 | REV | DATE | BY | CHECKED | GIOGO WO GIIIII GIOGII | |

WE-SL3 SMD Common Mode Line Filter

Order.- No.

DESCRIPTION

744253101




SIZE A4

H Soldering Specifications:



H1: Classification Reflow Profile for SMT components:

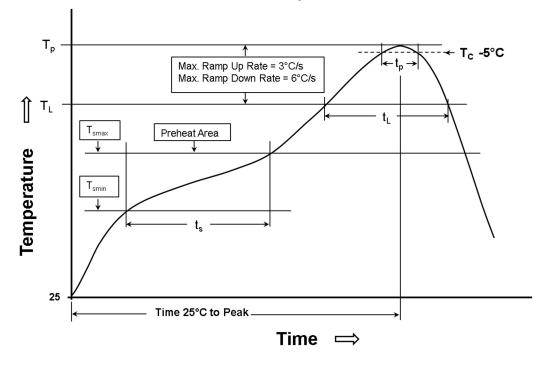

H2: Classification Reflow Profiles

| Profile Feature | Pb-Free Assembly | | | |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------|--|--|--|
| Preheat - Temperature Min (T _{smin}) - Temperature Max (T _{smax}) - Time (t _s) from (T _{smin} to T _{smax}) | 150°C 200°C 60-180 seconds | | | |
| Ramp-up rate (T _L to T _P) | 3°C/ second max. | | | |
| Liquidous temperature (T_L) Time (t_L) maintained above T_L | 217°C 60-150 seconds | | | |
| Peak package body temperature (Tp) | See Table H3 | | | |
| Time within 5°C of actual peak temperature (tp) | 20-30 seconds | | | |
| Ramp-down rate (T _P to T _L) | 6°C/ second max. | | | |
| Time 25°C to peak temperature | 8 minutes max. | | | |

refer to IPC/JEDEC J-STD-020D

H3: Package Classification Reflow Temperature

| | Package Thickness | Volume mm³ <350 | Volume mm³ 350 - 2000 | Volume mm³ >2000 |
|------------------|-------------------|--------------------|--------------------------|---------------------|
| PB-Free Assembly | < 1.6 mm | 260°C | 260°C | 260°C |
| PB-Free Assembly | 1.6 - 2.5 mm | 260°C | 250°C | 245°C |
| PB-Free Assembly | ≥ 2.5 mm | 250°C | 245°C | 245°C |

refer to IPC/JEDEC J-STD-020D

| | | | | Projection ———————————————————————————————————— | WE-SL3 SMD Common Mode Line Filter | | | | |
|-----|------------|-----|---------|--------------------------------------------------------------------------------------|------------------------------------|--|--|--|--|
| | | | | Würth Elektronik eiSos GmbH & Co. KG EMC & Inductive Solutions Max-Eyth-Str. 1 | | | | | |
| 2.1 | 2012-07-17 | SSt | SSt | 74638 Waldenburg | Order No. | | | | |
| 2.0 | 2012-07-17 | SSt | SBa | Germany Tel. +49 (0) 79 42 945 - 0 | RoHS&REACh | | | | |
| 1.0 | 2006-09-06 | MST | | www.we-online.com eiSos@we-online.com | 744253101 WÜRTH ELEKTRONIK A4 | | | | |
| REV | DATE | BY | CHECKED | Globaswe Grillio.com | | | | | |

I Cautions and Warnings:

The following conditions apply to all goods within the product series of WE-SL3 of Würth Elektronik eiSos GmbH & Co. KG:

General:

All recommendations according to the general technical specifications of the data sheet have to be complied with.

The disposal and operation of the product within ambient conditions which probably alloy or harm the wire isolation has to be avoided.

If the product is potted in customer applications, the potting material might shrink during and after hardening. Accordingly to this the product is exposed to the pressure of the potting material with the effect that the core, wire and termination is possibly damaged by this pressure and so the electrical as well as the mechanical characteristics are endanger to be affected. After the potting material is cured, the core, wire and termination of the product have to be checked if any reduced electrical or mechanical functions or destructions have occurred.

The responsibility for the applicability of customer specific products and use in a particular customer design is always within the authority of the customer. All technical specifications for standard products do also apply for customer specific products.

Cleaning solvents which are used to clean the application might damage or change the characteristics of the component.

Direct mechanical impact to the product shall be prevented as the ferrite material of the core could flake or in the worst case it could break.

Product specific:

Follow all instructions mentioned in the datasheet, especially:

- The soldering profile has to be complied with according to the technical reflow soldering specification, otherwise no warranty will be sustained.
- •All products are supposed to be used before the end of the period of 12 months based on the transfer of title, if not a 100% solderability can't be warranted
- . Violation of the technical product specifications such as exceeding the nominal rated current will result in the loss of warranty.



| | | | | Projection | | DESCRIPTION | | | | | |
|-----|------------|-----|---------|-------------------------------------------------------------------|--|------------------|-----------------------------|------|--|--|--|
| | | | | | | WE-SL3 SMD (| Common Mode Line Filt | er | | | |
| | | | | Würth Elektronik eiSos GmbH & Co. KG EMC & Inductive Solutions | | | | | | | |
| 2.1 | 2012-07-17 | SSt | SSt | Max-Eyth-Str. 1 74638 Waldenburg | | Order No. | COMPLIANT | SIZE | | | |
| 2.0 | 2012-07-17 | SSt | SBa | Germany Tel. +49 (0) 79 42 945 - 0 | | -440-0404 | ROHS&REACH WÜRTH ELEKTRONIK | SIZL | | | |
| 1.0 | 2006-09-06 | MST | | www.we-online.com eiSos@we-online.com | | 744253101 | TOWN TELEVISIONS | A4 | | | |
| REV | DATE | BY | CHECKED | CIOUS WC UTIIIIC.COTT | | | | | | | |

J Important Notes:

The following conditions apply to all goods within the product range of Würth Elektronik eiSos GmbH & Co. KG:

1. General Customer Responsibility

Some goods within the product range of Würth Elektronik eiSos GmbH & Co. KG contain statements regarding general suitability for certain application areas. These statements about suitability are based on our knowledge and experience of typical requirements concerning the areas, serve as general guidance and cannot be estimated as binding statements about the suitability for a customer application. The responsibility for the applicability and use in a particular customer design is always solely within the authority of the customer. Due to this fact it is up to the customer to evaluate, where appropriate to investigate and decide whether the device with the specific product characteristics described in the product specification is valid and suitable for the respective customer application or not.

2. Customer Responsibility related to Specific, in particular Safety-Relevant Applications

It has to be clearly pointed out that the possibility of a malfunction of electronic components or failure before the end of the usual lifetime cannot be completely eliminated in the current state of the art, even if the products are operated within the range of the specifications.

In certain customer applications requiring a very high level of safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health it must be ensured by most advanced technological aid of suitable design of the customer application that no injury or damage is caused to third parties in the event of malfunction or failure of an electronic component.

3. Best Care and Attention

Any product-specific notes, warnings and cautions must be strictly observed.

4. Customer Support for Product Specifications

Some products within the product range may contain substances which are subject to restrictions in certain jurisdictions in order to serve specific technical requirements. Necessary information is available on request. In this case the field sales engineer or the internal sales person in charge should be contacted who will be happy to support in this matter.

5. Product R&D

Due to constant product improvement product specifications may change from time to time. As a standard reporting procedure of the Product Change Notification (PCN) according to the JEDEC-Standard inform about minor and major changes. In case of further queries regarding the PCN, the field sales engineer or the internal sales person in charge should be contacted. The basic responsibility of the customer as per Section 1 and 2 remains unaffected.



6. Product Life Cycle

Due to technical progress and economical evaluation we also reserve the right to discontinue production and delivery of products. As a standard reporting procedure of the Product Termination Notification (PTN) according to the JEDEC-Standard we will inform at an early stage about inevitable product discontinuance. According to this we cannot guarantee that all products within our product range will always be available. Therefore it needs to be verified with the field sales engineer or the internal sales person in charge about the current product availability expectancy before or when the product for application design-in disposal is considered.

The approach named above does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.

7. Property Rights

All the rights for contractual products produced by Würth Elektronik eiSos GmbH & Co. KG on the basis of ideas, development contracts as well as models or templates that are subject to copyright, patent or commercial protection supplied to the customer will remain with Würth Elektronik eiSos GmbH & Co. KG.

8. General Terms and Conditions

Unless otherwise agreed in individual contracts, all orders are subject to the current version of the "General Terms and Conditions of Würth Elektronik eiSos Group", last version available at www.we-online.com.

| | | | | Projection | | DESCRIPTION | | | | | |
|-----|------------|-----|---------|-------------------------------------------|------------|-------------------------------------------------------|------------|------|--|--|--|
| | | | | | | | | | | | |
| | | | | - T | | $\ oxedsymbol{oxed}$ WE-SL3 SMD Common Mode Line Filt | | | | | |
| | | | | Würth Elektronik eiSos Gmbl | H & Co. KG | | | | | | |
| | | | | EMC & Inductive Solutions Max-Eyth-Str. 1 | | | | | | | |
| 2.1 | 2012-07-17 | SSt | SSt | 74638 Waldenburg | | Order No. | COMPLIANT | | | | |
| 2.0 | 2012-07-17 | SSt | SBa | Germany Tel. +49 (0) 79 42 945 - 0 | | 744050404 | ROHS&REACH | SIZE | | | |
| 1.0 | 2006-09-06 | MST | | www.we-online.com eiSos@we-online.com | | 744253101 | | A4 | | | |
| REV | DATE | BY | CHECKED | OLOGO WO OTHING.COM | | | | | | | |