



LU1S041F

“LAN-MATE” SERIES**SINGLE RJ45 CONNECTOR MODULE WITH INTEGRATED 10/100 BASE-TX MAGNETICS****P/N: LU1S041F**

Page : 1/2

Feature

- RJ-45 connector integrated with transformer/impedance resistor/high voltage capacitor.
- Size same as RJ-45 connector to save PCB board space.
- Reduced EMI radiation to improve EMI performance.
- Design for 10/100 BASE transmission over UTP-5 cable.
- Operating temperature range: 0 to +70 .
- Storage temperature range: -25 to +125 .

Electrical Specifications @ 25°C


Part Number	Turns Ratio (±5%)		OCL (uH Min) @ 100 KHz/0.1V with 8mA DC Bias	CMR (dB Min)			HI-POT (Vrms)
	TX	RX		1-30MHz	30-60MHz	60-125MHz	
LU1S041F	1CT:1CT	1CT:1CT	350	-30	-25	-20	1500

Continue

Part Number	Insertion Loss (dB Max)	Return Loss (dB Min)					Cross talk (dB Min)		
	0.3-100MHz	30MHz	40MHz	50MHz	60MHz	80MHz	0.3-30MHz	30-60MHz	60-100MHz
LU1S041F	-1.15	-16	-14	-13.5	-13	-10	-40	-35	-30

Schematic

Block Circuit x 1 set in LU1S041F

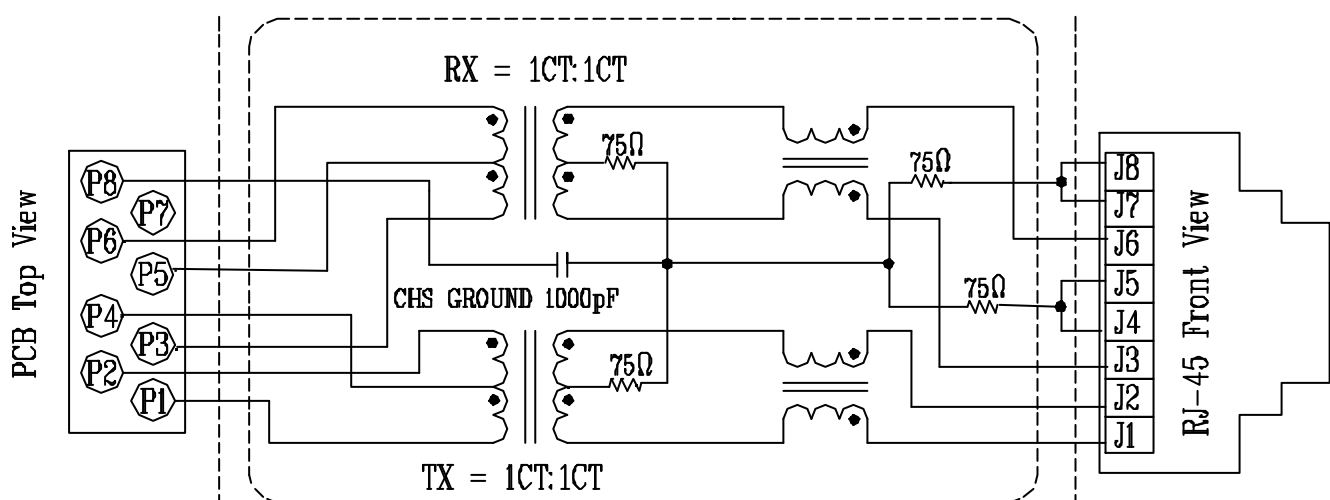



LU1S041F

Bothhandusa.com


"LAN-MATE" SERIES

SINGLE RJ45 CONNECTOR MODULE WITH INTEGRATED 10/100 BASE-TX MAGNETICS

P/N: LU1S041F

Page : 2/2

Mechanical

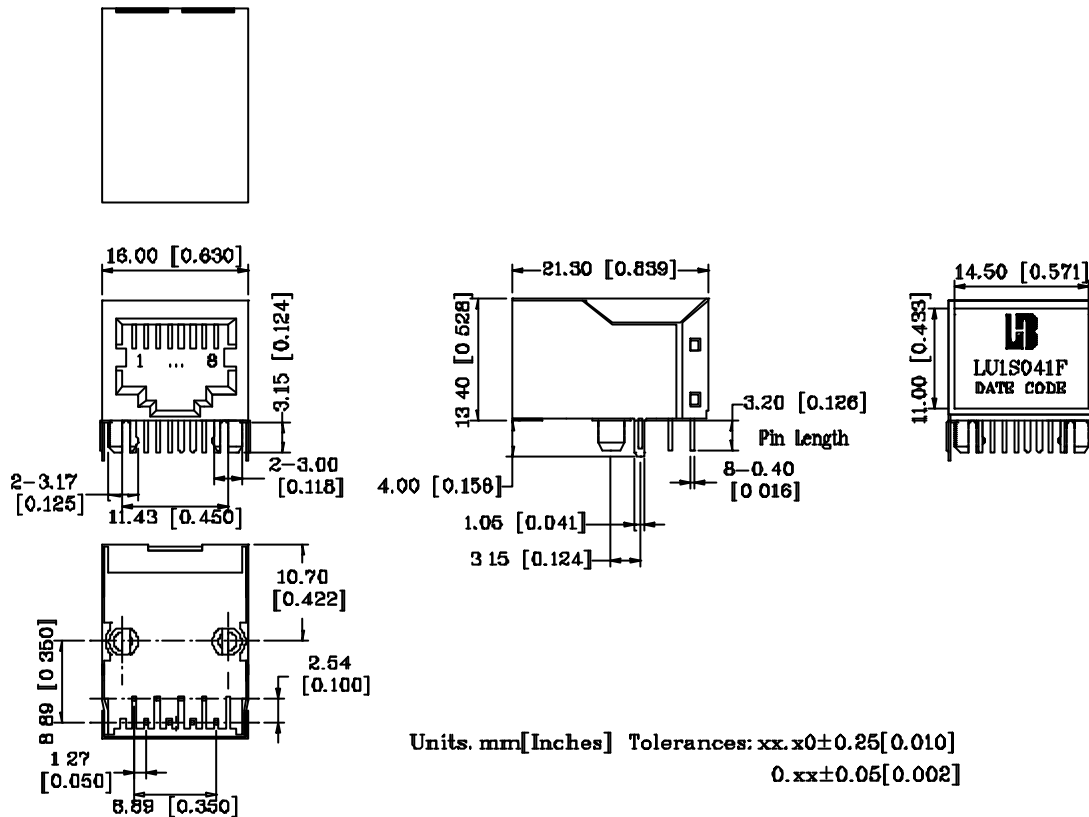

- | | |
|---------------------|---|
| 1. Plastic Material | : Thermoplastic (UL 94V-0), Black Housing |
| 2. Metal Shield | : Brass, 20u" inches thick Nickel |
| 3. Spring Wire | : Phosphor bronze with selective gold plating |
| 4. Solder Pin | : 0.4x0.4mm, Phosphor bronze with solder Plated |
| 5. Durability | : 750 Mating cycles Min. |

PCB Layout Mounting Hole(Top View)

