




Features

- ◇ Fast switching
- ◇ Diffused junction
- ◇ Low leakage
- ◇ Low forward voltage drop
- ◇ High current capability
- ◇ Easily cleaned with alcohol, Isopropanol and similar solvents

Mechanical Data

- ◇ Case: JEDEC R--1, molded plastic
- ◇ Polarity: Color band denotes cathode
- ◇ Weight: 0.007 ounces, 0.20 grams
- ◇ Mounting position: Any

R - 1

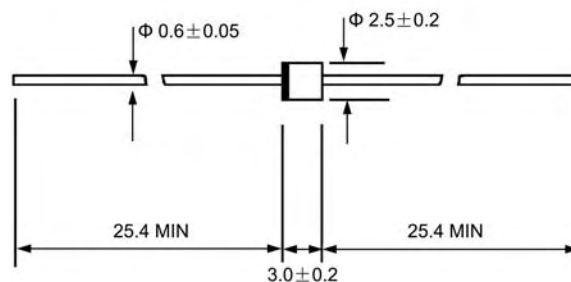

Dimensions in millimeters

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate by 20%.

| | | 1F10 | 1F12 | 1F14 | 1F15 | 1F16 | 1F18 | 1F20 | UNITS |
|-----------------------------------------------------------------------------------------------------------|-------------|---------------|------|------|------|------|------|------|------------|
| Maximum recurrent peak reverse voltage | V_{RRM} | 1000 | 1200 | 1400 | 1500 | 1600 | 1800 | 2000 | V |
| Maximum RMS voltage | V_{RMS} | 700 | 840 | 980 | 1050 | 1120 | 1260 | 1400 | V |
| Maximum DC blocking voltage | V_{DC} | 1000 | 1200 | 1400 | 1500 | 1600 | 1800 | 2000 | V |
| Maximum average forward rectified current 9.5mm lead length, @ $T_A=75^\circ C$ | $I_{F(AV)}$ | 0.5 | | | | | | | A |
| Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load $T_J=125^\circ C$ | I_{FSM} | 25.0 | | | | | | | A |
| Maximum instantaneous forward voltage @ 0.5 A | V_F | 1.8 | | | | | | | V |
| Maximum reverse current @ $T_A=25^\circ C$ at rated DC blocking voltage @ $T_A=100^\circ C$ | I_R | 5.0 100.0 | | | | | | | μA |
| Maximum reverse recovery time (NOTE1) | t_{rr} | 300 | | | | | | | ns |
| Typical junction capacitance (NOTE2) | C_J | 15 | | | | | | | pF |
| Operating junction temperature range | T_J | -55 --- + 150 | | | | | | | $^\circ C$ |
| Storage temperature range | T_{STG} | -55 --- + 150 | | | | | | | $^\circ C$ |

NOTE: 1. Reverse recovery test conditions: $I_F=0.5A, I_R=1.0A, I_{RR}=0.25A$.

2. Measured at 1MHz and applied reverse voltage of 4.0V.

Ratings AND Characteristic Curves

FIG.1 – FORWARD DERATING CURVE

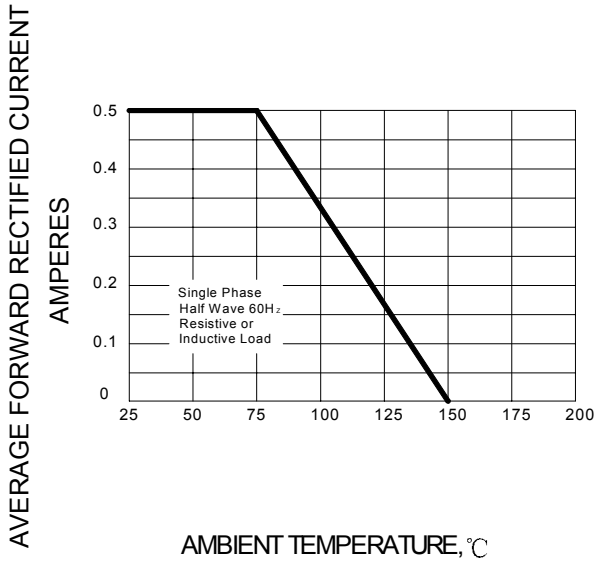


FIG.2 – PEAK FORWARD SURGE CURRENT


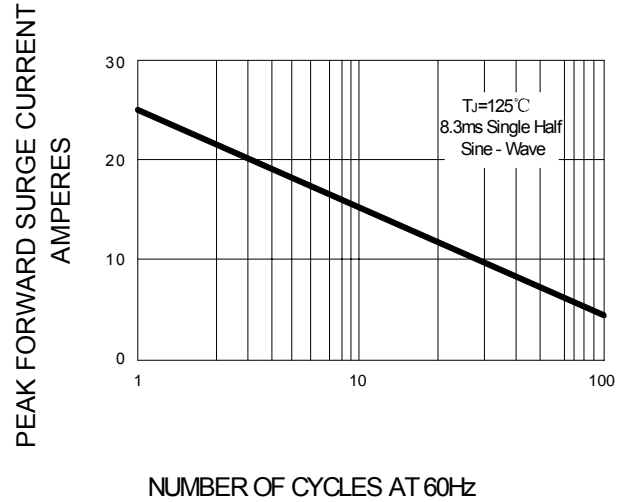


FIG.3 – TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC



NOTES: 1. RISE TIME = 7ns MAX. INPUT IMPEDANCE = $1\text{M}\Omega$, 22pF.
 2. RISE TIME = 10ns MAX. SOURCE IMPEDANCE = 50 Ω.

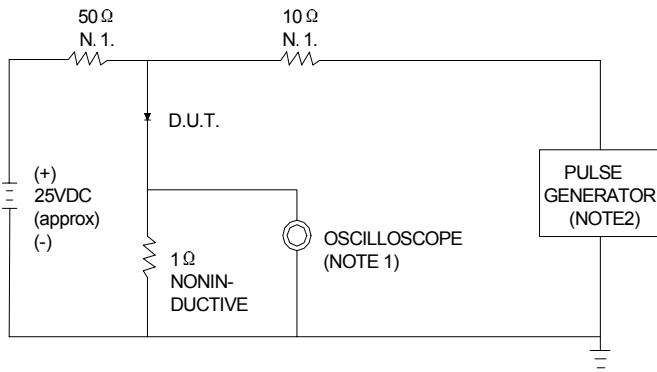