



1. SCOPE

This specification shall cover the characteristics of the ceramic resonator with 1000KHz

2. SPECIFICATION NO. :

3. PART NO. : ZTB1.25M

4. ELECTRICAL SPECIFICATION

4.1 Oscillation Frequency (Fosc) : 1000±3KHz

4.2 Resonant Impedance(Ro) : 50Ω max.

4.3 Capacitance (Co) : 75PF±20%

4.4 Temperature Characteristics

of Oscillation Frequency : ±0.3% max. (-20°C to +80°C)

4.5 Rated Voltage : 50 VDC max.

4.6 Maximum Input Voltage : 15 Vp-p

4.7 Insulation Resistance : 1000MΩ min.

5. Environmental Specification :

5.1 Lead Pull : 1KG load Terminal Direction Min.

5.2 Vibration : 600-3300rpm. 1.5mm.x.y & .z axes. 1H Each Min.

5.3 Shock : Random Drop, 30cm High Concrete Floor

5.4 Solderability : Dipping Terminals Into Molten Solder at 230±5°C At 5±0.5 Sec.

5.5 Resistance to

Soldering Heat : Dipping Lead Terminals No Closer Than 2mm From the Sn 350 ± 10°C 3 Sec. After 1H to Test.


5.6 Heat Resistance : Keep In 40±2°C Temp 90% Humidity For 100H After 1H To Test.

5.7 Operation Temperature : -20°C to +80°C

5.8 Storage Temperature : -40°C to +85°C

5.9 Aging Rate : Fosc ±0.5% max.

6. Dimensions (mm)

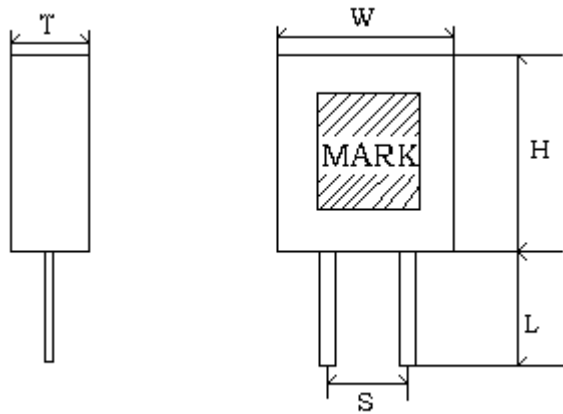

$W=5.1\text{mm}$ $T=2.2\text{mm}$ $H=6.3\text{mm}$ $S=2.5\text{mm}$ $L=4.0\text{mm}$

Mark : **ZTB1.25M**

7. Test circuit

