



CHENMKO ENTERPRISE CO.,LTD

Lead free devices

SURFACE MOUNT
SWITCHING DIODE ARRAY
VOLTAGE 80 Volts CURRENT 500 mAmpere

CH004SDWPT

APPLICATION

- * Ultra high speed switching
- * For general purpose switching application

FEATURE

- * Small surface mounting type. (SC-88/SOT-363)
- * High speed. (TRR=1.5nSec Typ.)
- * Suitable for high packing density.
- * Maximum total power dissipation is 300mW.
- * Peak forward current is 350mA.


CONSTRUCTION

- * Silicon epitaxial planar


MARKING

- * DD

CIRCUIT



SC-88/SOT-363

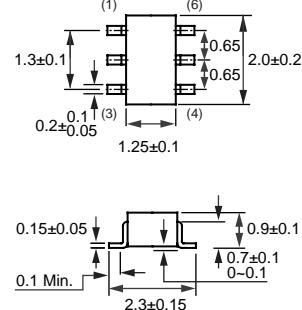

Dimensions in millimeters

SC-88/SOT-363

MAXIMUM RATINGS (At TA = 25°C unless otherwise noted)

| RATINGS | SYMBOL | CH004SDWPT | UNITS |
|--|---------------------------------|-------------|-------|
| Maximum Non-Repetitive Peak Reverse Voltage | VRM | 100 | Volts |
| Maximum RMS Voltage | VRMS | 80 | Volts |
| Maximum Repetitive Peak Reverse and DC Blocking Voltage | VRRM, VDC | 80 | Volts |
| Maximum Average Forward Rectified Current | Io | 500 | mAmps |
| Non-Repetitive Peak Forward Surge Current @t=1.0uSec @t=1.0Sec | IFSM | 20 2.0 | Amps |
| Typical Junction Capacitance between Terminal (Note 1) | CJ | 4.0 | pF |
| Maximum Reverse Recovery Time (Note 2) | TRR | 4.0 | nSec |
| Thermal Resistance Junction to Ambient (Note 3) | RθJA | 625 | °C/W |
| Maximum Operating and Storage Temperature Range | T ₄ T _{STG} | -65 to +150 | °C |

ELECTRICAL CHARACTERISTICS (At TA = 25°C unless otherwise noted)

| CHARACTERISTICS | SYMBOL | CH004SDWPT | UNITS |
|---|--------|------------------------------|----------------------------------|
| Maximum Instantaneous Forward Voltage @If=5.0mA @If=20mA @If=100mA @If=150mA | VF | 0.72 0.93 1.00 1.25 | Volts |
| Maximum Average Reverse Current @VR=20V @VR=70V @VR=25V, TJ=150°C @VR=75V, TJ=150°C | IR | 25 0.1 30 50 | nAmps uAmps uAmps uAmps |

- NOTES : 1. Measured at 1.0 MHz and applied reverse voltage of 0 volts.
 2. Measured at applied forward current of 10mA and reverse current of 10mA.
 3. Device mounted on FR-4 by 1 inch X 0.85 inch X 0.062 inch
 4. ESD sensitive product handling required.

2004-10

RATING CHARACTERISTIC CURVES (CH004SDWPT)

FIG. 1 - TYPICAL FORWARD CURRENT DERATING CURVE

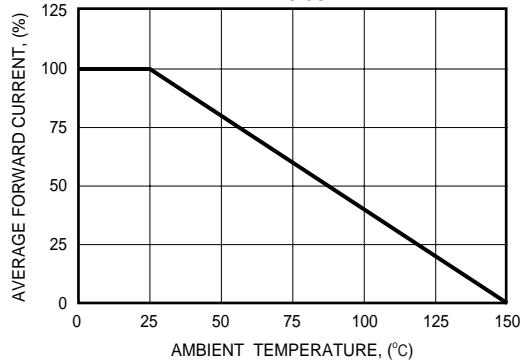


FIG. 2 - FORWARD CHARACTERISTICS

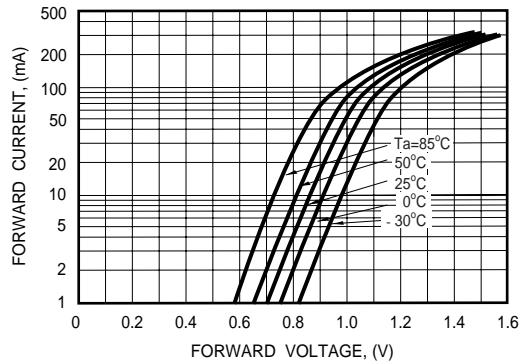


FIG. 3 - TYPICAL JUNCTION CAPACITANCE

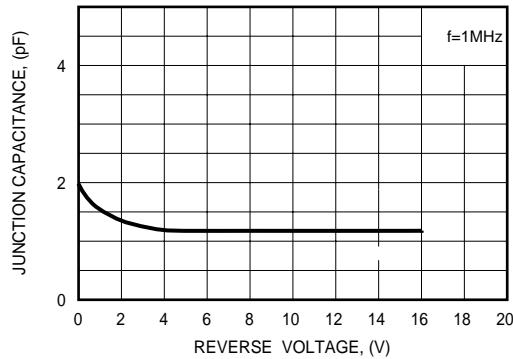


FIG. 4 - REVERSE CHARACTERISTICS

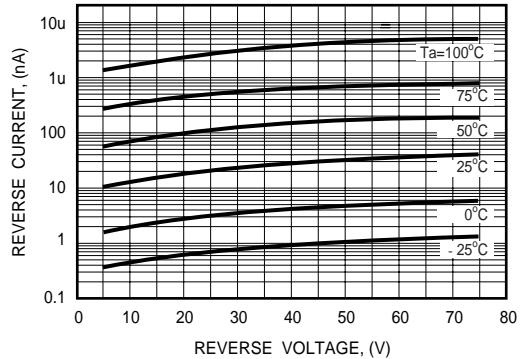


FIG. 5 - REVERSE RECOVERY TIME

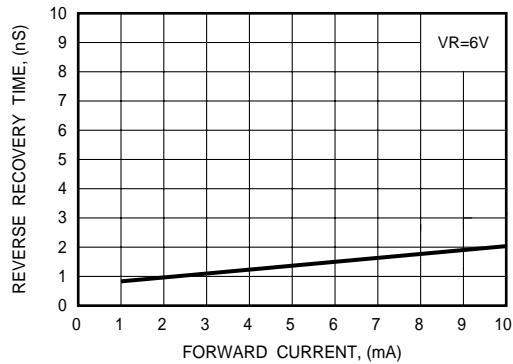


FIG. 6 - REVERSE RECOVERY TIME MEASUREMENT CIRCUIT

