


10 BASE-T LOW PASS FILTER

P/N:FB2022B-3 DATA SHEET

Feature



- Operating temperature range : 0°C to +70°C.
- Storage temperature range: -25°C to +125°C.


Electrical Specifications @ 25°C

Part Number	CUT-OFF Frequency	Group Delay (ns Max)	Cross talk(dB Min)	HI-POT (Vrms)
		5-10 MHz	1-10 MHz	
FB2022B-3	17 MHz ± 0.7MHz	4	-45	1500

Continue

Part Number	Insertion Loss (dB Max) TX/RX	Return Loss (dB Min) TX/RX		Attenuation (dB Min) TX/RX				CMR(dB Min)
	1-10MHz	1-10MHz	20 MHz z	25 MHz	30 MHz	40 MHz	50 MHz	70-100 MHz
FB2022B-3	-4.5	-15	-7/-6	-19/-14	-32/-20	-35/-31	-40/-35	-45

Schematic

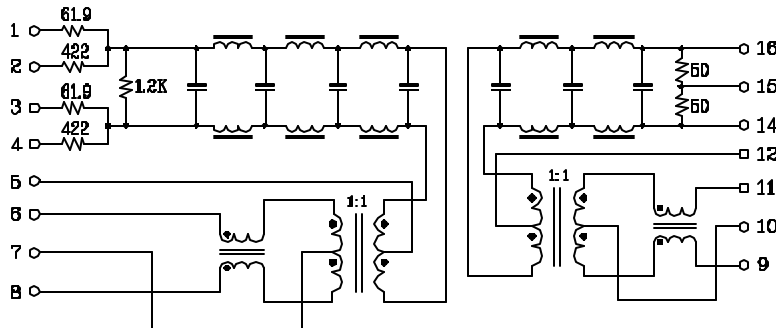

Mechanical

