



HV227
HV228

Low Charge Injection 8-Channel High Voltage Analog Switch

Ordering Information

Operating V_{PP}	$V_{PP} - V_{NN}$	Package Options				
		28-pin ceramic ^{††} side-brazed DIP	Die in wafer pack	28-pin plastic DIP	28-lead plastic chip carrier	28-lead SOW
40V to 80V	140V	HV22714C	HV22714X	HV22714P	HV22714PJ	HV22714WG
	160V	HV22716C	HV22716X	HV22716P	HV22716PJ	HV22716WG
80V to 150V	140V	HV22814C	HV22814X	HV22814P	HV22814PJ	HV22814WG
	160V	HV22816C	HV22816X	HV22816P	HV22816PJ	HV22816WG

* Consult factory for Cerdip and Ceramic LCC availability.

† Consult factory for MIL-STD-883 processing.

Features

- ☐ HVC MOS[®] technology for high performance
- ☐ Low charge injection
- ☐ Very low quiescent power dissipation – 10 μ A
- ☐ Output On-resistance typically 22 ohms
- ☐ Low parasitic capacitances
- ☐ DC to 10MHz analog signal frequency
- ☐ 50dB typical output off isolation at 5 MHz
- ☐ CMOS logic circuitry for low power
- ☐ Excellent noise immunity
- ☐ On-chip shift register, latch and clear logic circuitry
- ☐ Flexible high voltage supplies
- ☐ Surface mount package available

General Description

This device is a low charge injection 8-channel high-voltage analog switch integrated circuit (IC) intended for use in applications requiring high voltage switching controlled by low voltage control signals, such as ultrasound imaging and printers. Input data is shifted into an 8-bit shift register which can then be retained in an 8-bit latch. To reduce any possible clock feedthrough noise, Latch Enable Bar (LE) should be left high until all bits are clocked in. Using HVC MOS technology, this switch combines high voltage bilateral DMOS switches and low power CMOS logic to provide efficient control of high voltage analog signals.

Absolute Maximum Ratings*

V_{DD} logic power supply voltage	-0.5V to +18V
$V_{PP} - V_{NN}$ supply voltage	174V [†]
V_{PP} positive high voltage supply	-0.5V to +160V [†]
V_{NN} Negative high voltage supply	+0.5V to -160V [†]
Logic input voltages	-0.5V to $V_{DD} + 0.3V$
Analog signal range	V_{NN} to V_{PP}
Peak analog signal current/channel	3.0A
Storage temperature	-65°C to +150°C
Power dissipation	Plastic Package 0.8W Ceramic Package 2.0W

* Absolute Maximum Ratings are those values beyond which damage to the device may occur. Functional operation under these conditions is not implied. Continuous operation of the device at the absolute rating level may affect device reliability.

† For HV22716 and HV22816

Electrical Characteristics

(over operating conditions, $V_{PP} = +80V$, $V_{NN} = -80V$, and $V_{DD} = 15V$ unless otherwise noted)*

DC Characteristics

Characteristics	Sym	0°C		+25°C			+70°C		Units	Test Conditions
		min	max	min	typ	max	min	max		
Small Signal Switch (ON) Resistance	R_{ONS}		24		22	25		28	ohms	$I_{SIG} = 5mA$
	R_{ONS}		18		18	20		23	ohms	$I_{SIG} = 200mA$
Small Signal Switch (ON) Resistance Matching	ΔR_{ONS}		20		5.0	20		20	%	$I_{SW} = 5mA$
Large Signal Switch (ON) Resistance	R_{ONL}				13	22			ohms	$V_{SIG} = V_{PP} - 10V$, $I_{SIG} = 1.0A$
Switch Off Leakage Per Switch	I_{SOL}		5.0		1.0	10		15	μA	$V_{SIG} = V_{PP} - 10V$ and $V_{NN} + 10V$
DC Offset Switch Off			300		100	300		300	mV	$R_L = 100K\Omega$
DC Offset Switch On			500		100	500		500	mV	$R_L = 100K\Omega$
Pos. HV Supply Current	I_{PPQ}				10	50			μA	ALL SWS OFF
Neg. HV Supply Current	I_{NNQ}				-10	-50			μA	
Pos. HV Supply Current	I_{PPQ}				10	50			μA	ALL SWS ON $I_{SW} = 5mA$
Neg. HV Supply Current	I_{NNQ}				-10	-50			μA	
Switch Output Peak Current			3.0		3.0	2.0		2.0	A	$V_{SIG} \leq 0.1\%$ Duty Cycle
Output Switch Frequency	f_{SW}					50			KHz	Duty Cycle = 50%
I_{PP} Supply Current	I_{PP}		4.0		3.5	5.0		5.5	mA	HV output switching frequency = 50KHz
I_{NN} Supply Current	I_{NN}		4.0		3.5	5.0		5.5	mA	
Logic Supply Average Current	I_{DD}		6.0		4.0	6.0		6.0	mA	$f_{CLK} = 3MHz$
Logic Supply Quiescent Current	I_{DDQ}		10			10		10	μA	
Data Out Source Current	I_{SOR}	0.45		0.45	0.70		0.40		mA	$V_{OUT} = V_{DD} - 0.7V$
Data Out Sink Current	I_{SINK}	0.45		0.45	0.70		0.40		mA	$V_{OUT} = 0.7V$

AC Characteristics

Characteristics	Sym	0°C		+25°C			+70°C		Units	Test Conditions
		min	max	min	typ	max	min	max		
Time to Turn Off V_{SIG} **	$t_{SIG(OFF)}$			0					ns	
Set Up Time Before $\overline{LE}$ Rises	t_{SD}	150		150			150		ns	
Time Width of $\overline{LE}$	t_{WLE}	150		150			150		ns	
Clock Delay Time to Data Out	t_{DO}		175			175		190	ns	
Turn On Time	t_{ON}		3.0			3.0		3.0	μs	$R_L = 10K\Omega$
Turn Off Time	t_{OFF}		5.0			5.0		5.0	μs	$R_L = 10K\Omega$
Time Width of CL	t_{WCL}	150		150			150		ns	
Off Isolation	KO	-30		-30	-33		-30		dB	$f = 5MHz$, $1K\Omega//15pF$ load
		-45		-45	-50		-45		dB	$f = 5MHz$, 50Ω load
Clock Freq	f_{CLK}		5.0			5.0		5.0	MHz	50% duty cycle $t_{DATA} = t_{CLK}/2$
Set Up Time Data to Clock	t_{SU}	15		15	8.0		20		ns	
Hold Time Data from Clock	t_H	35		35			35		ns	
Switch Crosstalk	K_{CR}	-60		-60	-70		-60		dB	$f = 5MHz$, 50Ω load
Off Capacitance SW to GND	$C_{SG(OFF)}$	5.0	17	5.0	12	17	5.0	17	pF	0V, 1MHz
On Capacitance SW to GND	$C_{SG(ON)}$	25	50	25	38	50	25	50	pF	0V, 1MHz
Output Voltage Spike	$+V_{SPK}$				150				mV	$V_{PP} = +80V$, $V_{NN} = -80V$, $R_L = 50\Omega$
	$-V_{SPK}$				150					

* For HV22716 and HV22816. For HV22714 and HV22814: $V_{PP} = 70V$, $V_{NN} = -70V$ and $V_{DD} = 15V$.

** Time required for analog signal to turn off before output switch turns off (critical timing).

Operating Conditions*


Symbol	Device				Value
	HV22714	HV22716	HV22814	HV22816	
V_{PP}	X				40V to 70V
		X			40V to 80V
			X		70V to 130V
				X	80V to 150V
V_{NN}	X		X		-10V to $V_{PP} - 140V$
		X		X	-10V to $V_{PP} - 160V$
V_{DD}	X	X	X	X	10V to 15.5V
V_{IH}	X	X	X	X	$V_{DD} - 2.0V$ to V_{DD}
V_{IL}	X	X	X	X	0V to 2.0V
V_{SIG}	X	X	X	X	$V_{NN} + 10V$ to $V_{PP} - 10$
T_A	X	X	X	X	0°C to 70°C

Note: Power up/down sequence is arbitrary except GND must be powered-up first and powered-down last.


* V_{SIG} must be $V_{NN} \leq V_{SIG} \leq V_{PP}$ or floating during power up/down transition.

Rise and fall times of power supplies, V_{DD} , V_{PP} , and V_{NN} should not exceed 1.0msec.


Test Circuits

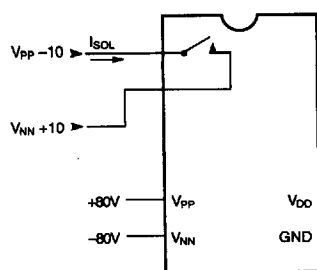


Switch OFF Leakage

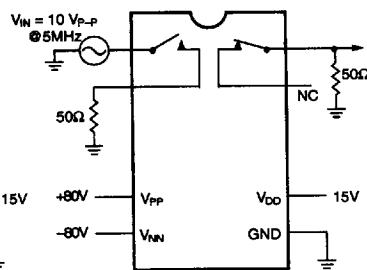


Crosstalk




TON/TOFF

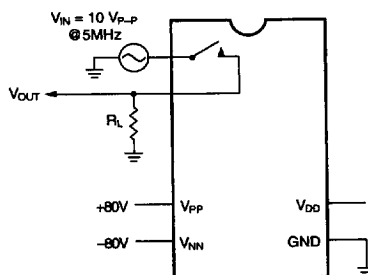

OFF Isolation

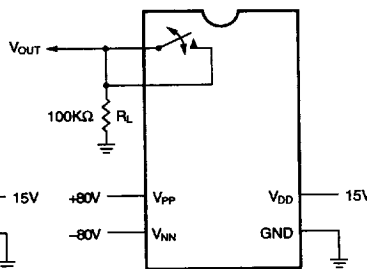


DC Offset ON/OFF

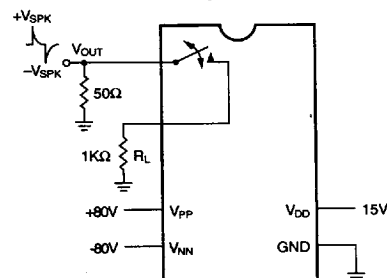


Output Voltage Spike

Logic Timing Waveforms

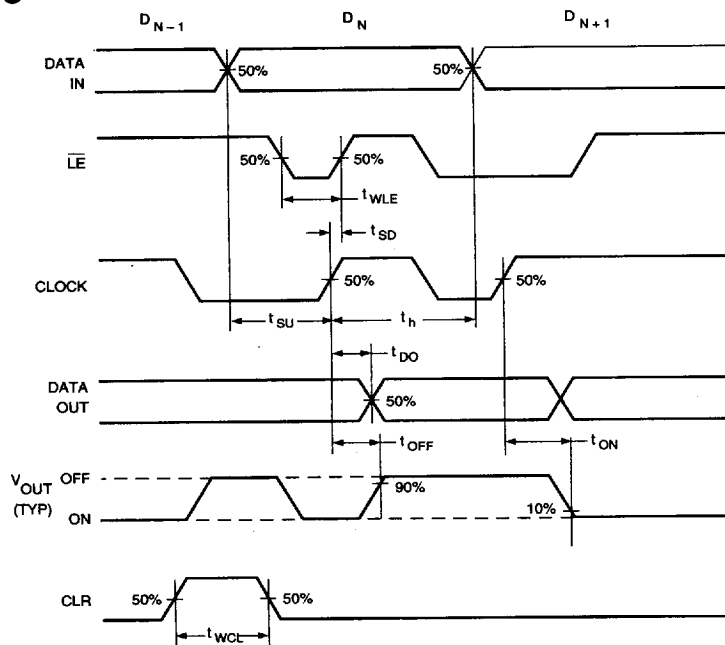

Logic Diagram

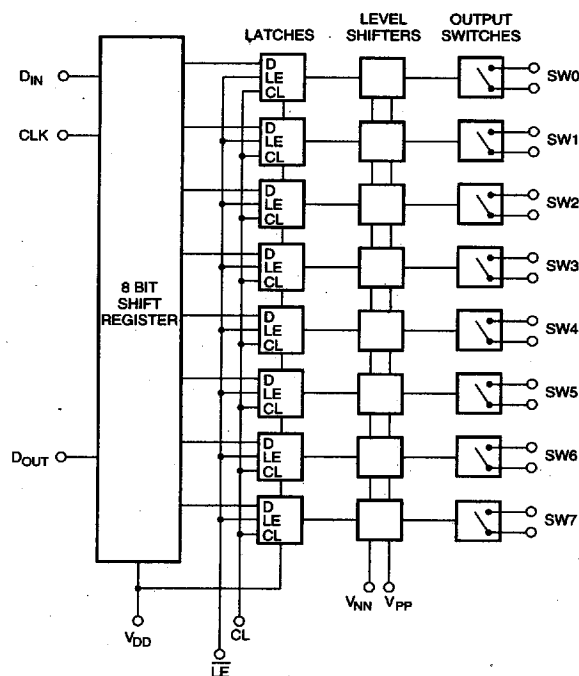

Truth Table


D0	D1	D2	D3	D4	D5	D6	D7	LE	CL	SW0	SW1	SW2	SW3	SW4	SW5	SW6	SW7
L								L	L	OFF							
H								L	L	ON							
	L							L	L		OFF						
	H							L	L		ON						
		L						L	L			OFF					
		H						L	L			ON					
			L					L	L				OFF				
			H					L	L				ON				
				L				L	L					OFF			
				H				L	L					ON			
					L			L	L						OFF		
					H			L	L						ON		
						L		L	L							OFF	
						H		L	L							ON	
							L	L	L								OFF
							H	L	L								ON
X	X	X	X	X	X	X	X	X	H	HOLD PREVIOUS STATE							
X	X	X	X	X	X	X	X	X	H	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF

Notes:


- The eight switches operate independently.
- Serial data is clocked in on the L→H transition CLK.
- The switches go to a state retaining their present condition at the rising edge of LE. When LE is low the shift register data flows through the latch.
- D_{OUT} is high when switch 7 is on.
- Shift register clocking has no effect on the switch states if LE is H.

Typical Performance Curves


R_{ON} vs. Ambient Temp T_A
 $V_{DD} = 15V$ & $V_{PP}/V_{NN} = \pm 80V$

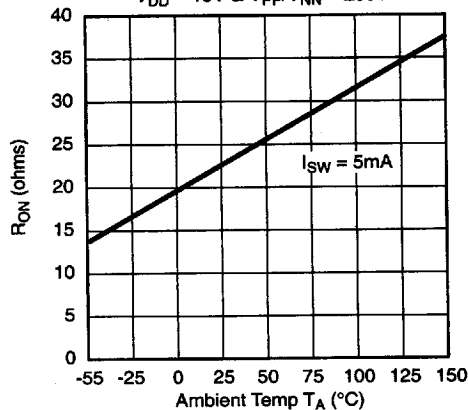


R_{ON} vs. V_{PP}/V_{NN}
 $V_{DD} = 15V$

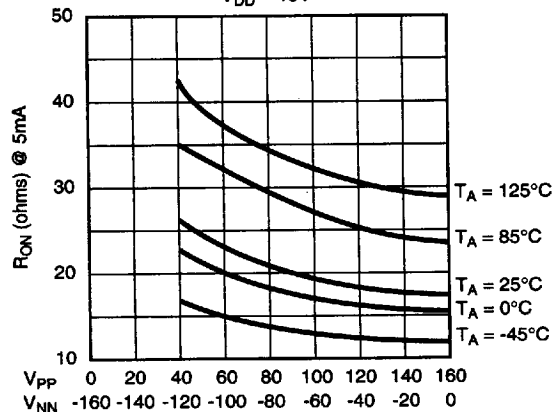


Switch Current vs Switch Voltage Drop
 $V_{DD} = 15V$ & $V_{PP}/V_{NN} = \pm 80V$

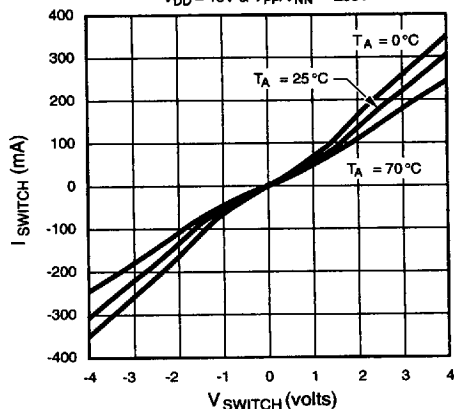


I_{PP}/I_{NN} vs Output Switching Frequency
 $V_{DD} = 15V$ & $V_{PP}/V_{NN} = \pm 80V$

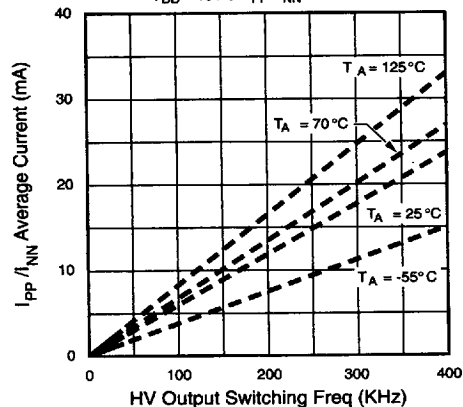







Junction Temp T_j vs Switch Peak Current
 V_{SIG} Freq = 10KHz & Duty Cycle = 0.1%
 $V_{DD} = 15V$ & $V_{PP}/V_{NN} = \pm 80V$

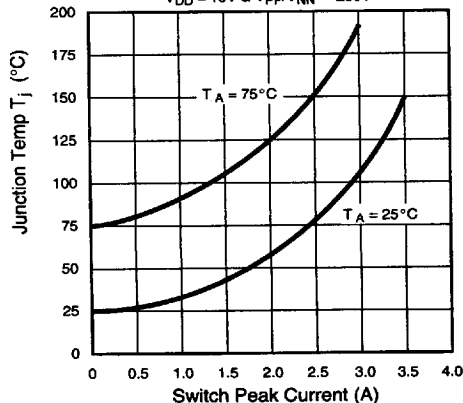




T_{DO} vs. Ambient Temp T_A
 $V_{PP}/V_{NN} = \pm 80V$

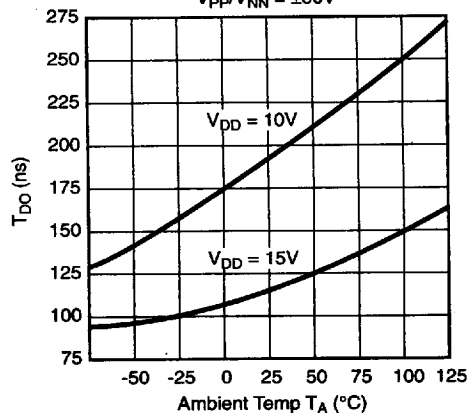

Typical Performance Curves

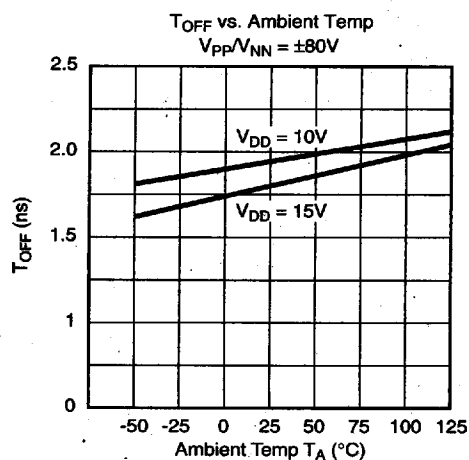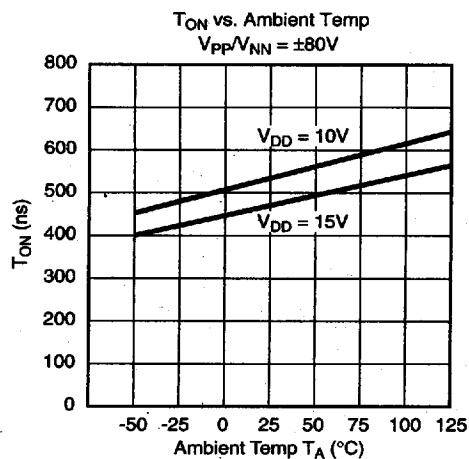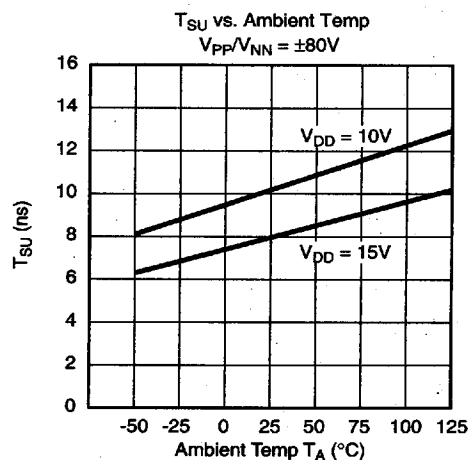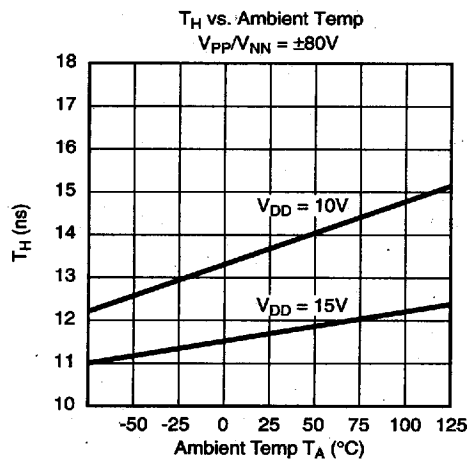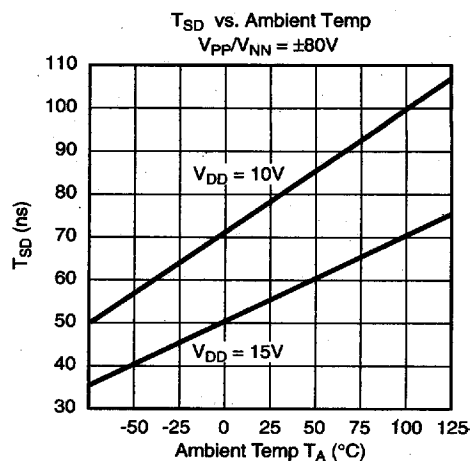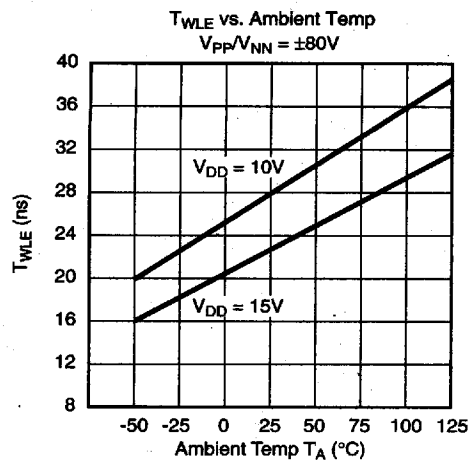

Typical Performance Curves

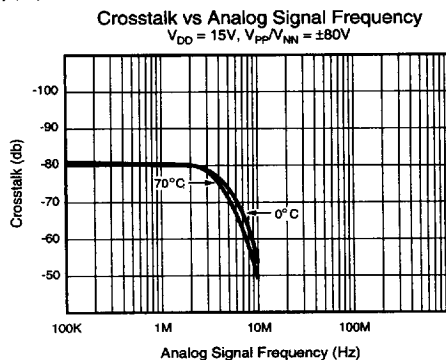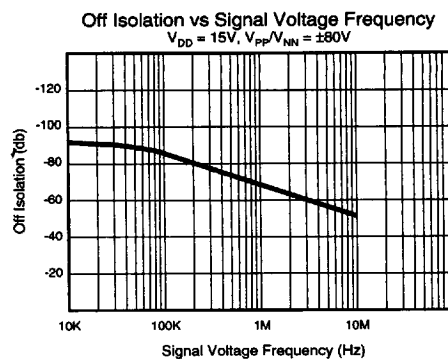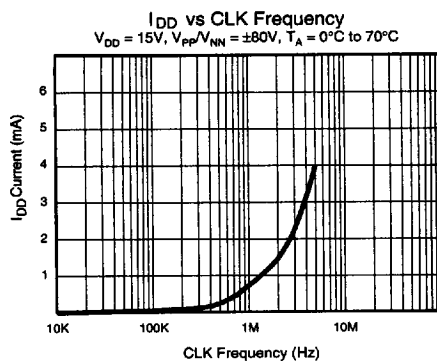

Pin Configurations

28-Pin DIP

Pin	Function	Pin	Function
1	SW3	15	N/C
2	SW3	16	D _{IN}
3	SW2	17	CLK
4	SW2	18	LE
5	SW1	19	CL
6	SW1	20	D _{OUT}
7	SW0	21	SW7
8	SW0	22	SW7
9	V _{PP}	23	SW6
10	V _{NN}	24	SW6
11	N/C	25	SW5
12	GND	26	SW5
13	V _{DD}	27	SW4
14	N/C	28	SW4


28-Pin J-Lead

Pin	Function	Pin	Function
1	SW3	15	N/C
2	SW3	16	D _{IN}
3	SW2	17	CLK
4	SW2	18	LE
5	SW1	19	CL
6	SW1	20	D _{OUT}
7	SW0	21	SW7
8	SW0	22	SW7
9	V _{PP}	23	SW6
10	V _{NN}	24	SW6
11	N/C	25	SW5
12	GND	26	SW5
13	V _{DD}	27	SW4
14	N/C	28	SW4

28-Lead SOW


Pin	Function	Pin	Function
1	N/C	15	SW0
2	SW6	16	SW0
3	SW6	17	N/C
4	SW5	18	V _{PP}
5	SW5	19	V _{NN}
6	SW4	20	GND
7	SW4	21	V _{DD}
8	SW3	22	D _{IN}
9	SW3	23	CLK
10	SW2	24	LE
11	SW2	25	CL
12	SW1	26	D _{OUT}
13	SW1	27	SW7
14	N/C	28	SW7

Package Outlines

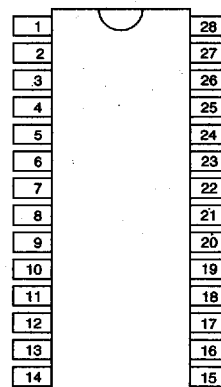


top view

28-pin DIP



top view

28-pin J-lead package

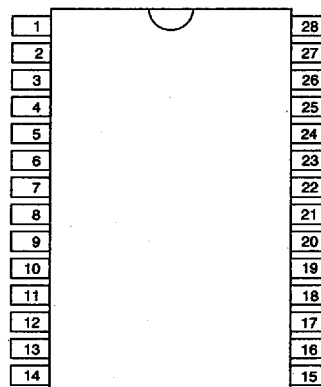

top view

28-pin SOW