



CHENMKO ENTERPRISE CO.,LTD

Lead free devices

ULTRA FAST RECTIFIER

VOLTAGE RANGE 50 - 600 Volts CURRENT 15 Amperes

**U15A05PT
THRU
U15A60PT**

FEATURES



- * Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- * Dual rectifier construction, positive centertap
- * Glass passivated chip junctions
- * Low power loss
- * Low forward voltage, high current capability
- * High surge current capability
- * Ultra fast recovery times for high efficiency
- * High temperature soldering guaranteed : 260°C/10 seconds at terminals

MECHANICAL DATA

Case: JEDEC TO-220A molded plastic
Terminals: Lead solderable per MIL-STD-750, Method 2026
Polarity: As marked
Weight: 1.81 grams (Approximately)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.
 Single phase, half wave, 60 Hz, resistive or inductive load.
 For capacitive load, derate current by 20%.

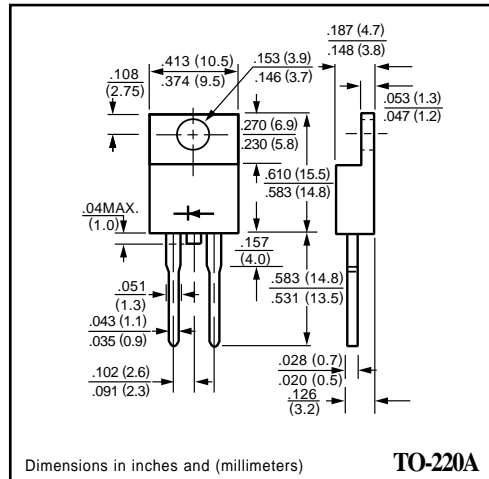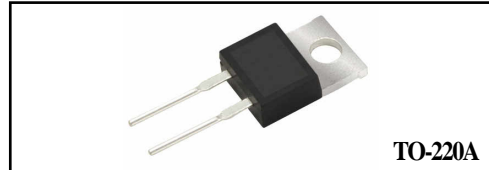

MAXIMUM RATINGS (At TA = 25°C unless otherwise noted)

RATINGS	SYMBOL	U15A05PT	U15A10PT	U15A15PT	U15A20PT	U15A30PT	U15A40PT	U15A50PT	U15A60PT	UNITS
Maximum Recurrent Peak Reverse Voltage	VRRM	50	100	150	200	300	400	500	600	Volts
Maximum RMS Voltage	VRMS	35	70	105	140	210	280	350	420	Volts
Maximum DC Blocking Voltage	Vdc	50	100	150	200	300	400	500	600	Volts
Maximum Average Forward Rectified Current	Io	15.0								Amps
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	IFSM	250								Amps
Typical Junction capacitance per leg (NOTE 1)	CJ	200				140				pF
Typical thermal resistance (NOTE 2)	R θJC	2.5								°C / W
Operating and Storage Temperature Range	TJ, TSTG	-65 to +150								°C

ELECTRICAL CHARACTERISTICS (At TA = 25°C unless otherwise noted)

CHARACTERISTICS	SYMBOL	U15A05PT	U15A10PT	U15A15PT	U15A20PT	U15A30PT	U15A40PT	U15A50PT	U15A60PT	UNITS
Maximum Instantaneous Forward Voltage at 15.0 A DC	VF	0.975				1.30		1.50		Volts
Maximum DC reverse current at rated DC blocking voltage per leg	IR	10.0								uAmps
		500								
Maximum reverse recovery time (NOTE 3) per leg	trr	35				50				nS

- NOTES : 1. Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts
 2. Thermal resistance from junction to case per leg mounted on heatsink
 3. Reverse recovery test conditions : IF = 0.5 A, IR = -1.0 A, IRR = -0.25 A.
 4. Suffix " P " = Case Positive, Suffix " R " = Case Negative.

RATING CHARACTERISTIC CURVES (U15A05PT THRU U15A60PT)

FIG. 1 - TYPICAL FORWARD CURRENT DERATING CURVE

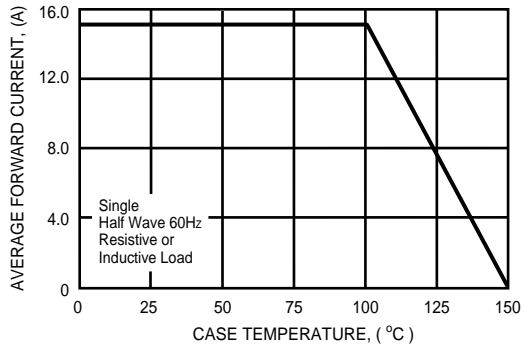


FIG. 2 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

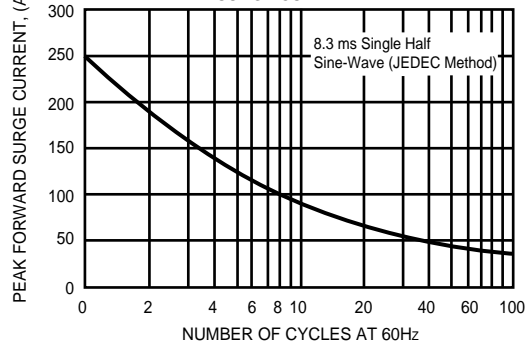


FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

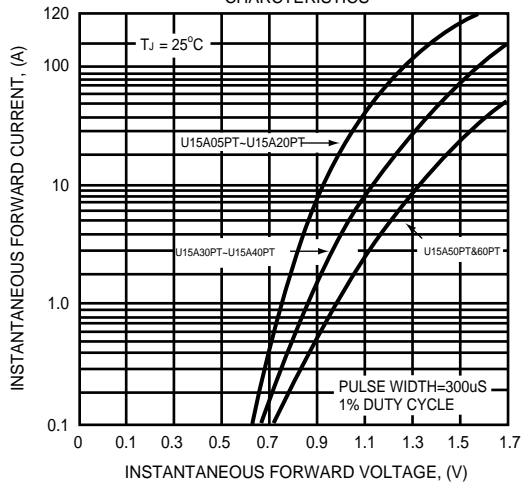


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS

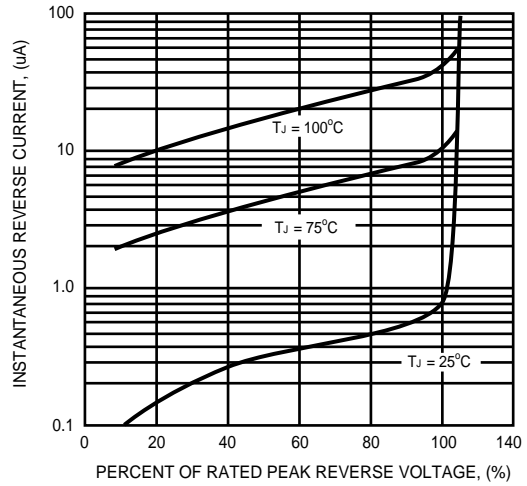


FIG. 5 - TYPICAL JUNCTION CAPACITANCE

