
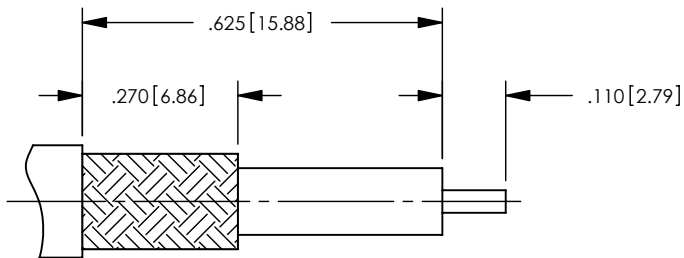


NOTES: UNLESS OTHERWISE SPECIFIED

1. FOR GENERAL SERIES SPECIFICATIONS, SEE SD12-0000.
2. MATERIAL SPECIFICATIONS:
 CENTER CONTACT, SLEEVE AND BUSHING: BRASS PER ASTM B16.
 BODY, OUTER CONTACT, AND FERRULE: COPPER ALLOY
 INSULATOR: TEFLON PER ASTM D1710
3. FINISH SPECIFICATIONS:
 CENTER CONTACT: .000050 MIN GOLD PER ASTM B488
 OVER .000100 MIN COPPER PER ASTM B734 (RoHS)
 ALL OTHER METAL PARTS: .000080 MIN TRI-METAL
 OVER .000100 MIN COPPER PER ASTM B734 (RoHS)
 FERRULE: .000010 MIN TRI-METAL OVER .000100 MIN COPPER PER ASTM B734 (RoHS)
4. FERRULE AND CONTACT SHIPPED LOOSE.
5. DESIGNED FOR USE WITH RG55/U, 142, 223, 400 AND EQUIVALENT CABLES.
6. CRIMP FERRULE USING .213 HEX DIE.
7. MATES WITH STANDARD TYPE N INTERFACE PER
 MIL-STD-348A, FIG 304.2 (.187±.015 THREAD LENGTH).
8. ELECTRICAL SPECIFICATIONS:
 FREQUENCY RANGE: DC-11GHZ
 VSWR: 1.15 MAX

REV	DESCRIPTION	BY DATE	APPD
A	RELEASED PER ER5435	CMB 11/28/07	CMB

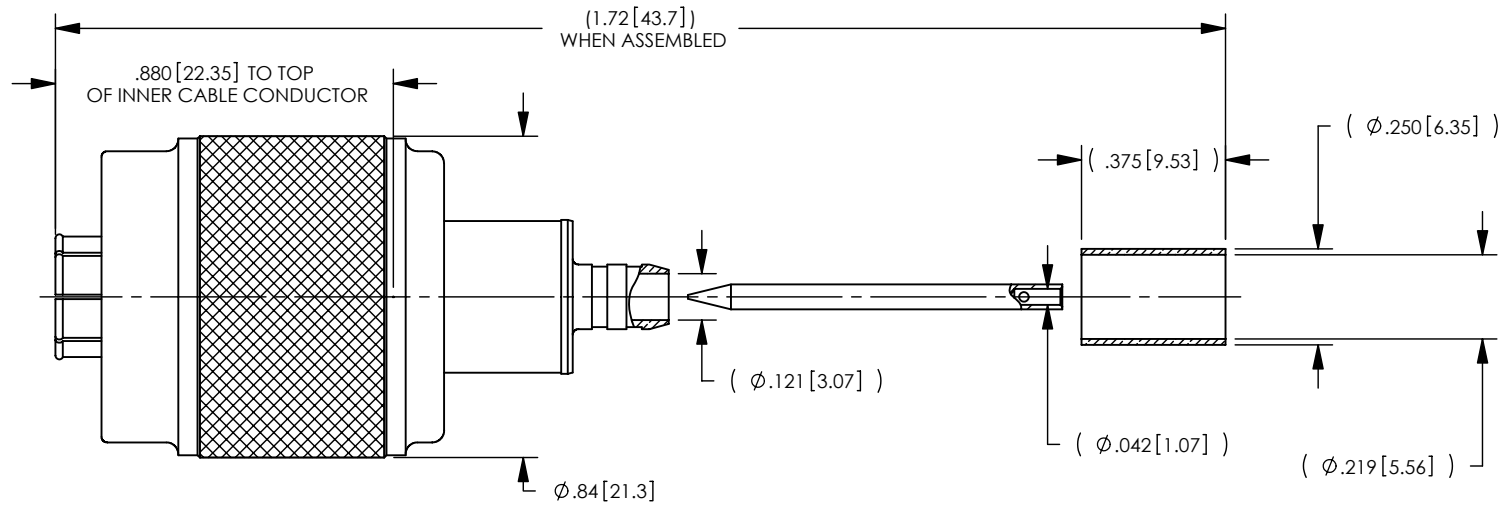

CABLE TRIM DIMENSIONS

CATALOG P/N: 120-900-1161R

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES [MM] TOLERANCES: DECIMAL: .XX ± .01 [0.3] .XXX ± .005 [0.13] .XXXX ± .XXXX ANGLES: ± 2° SCALE: 2:1				Winchester Electronics Corporation 62 Barnes Industrial Road North Wallingford, Connecticut 06492	
CUSTOMER DRAWING				QC-N STRAIGHT PLUG CRIMP ATTACHMENT	
DRAWN	DATE	APPROVED	DATE	A	SD120-900-1161R
PSM	11/14/05	DC	11/28/07		
APPROVED	DATE	APPROVED	DATE	SHT 1 OF 1	REV A
JC	11/28/07	M.AYUB	11/28/07		