


2012 Size Chip Multilayer Diplexer for CELL / PCS

FSLF-S080HL

Shape & Size

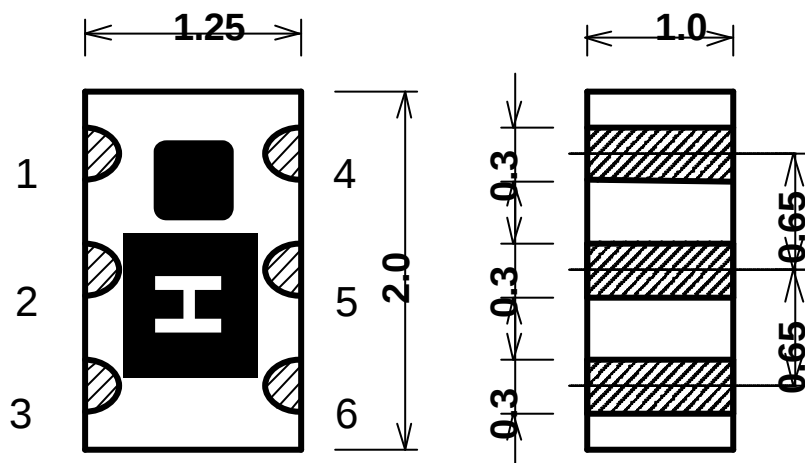





6 : High
4 : Low
2 : Com
1,3,5 : C

uni


Specifications

Frequency Range	f1:824- 894MHz	Attenuation AMPS <=>C
	f2:1850-1990MHz	
Insertion Loss in f1 AMPS <=>Common	0.5dB Max.(at +25deg) 0.55dB Max.(at -35to+85deg)	Attenuation PCS <=>Com
Insertion Loss in f2 PCS <=>Common	0.6 dB Max.(at +25deg) 0.65dB Max.(at -35to+85deg)	Power Cap Temperatur
Return Loss (all port)	12 dB Min.	

FSLF-S080HL SAMPLE DATA

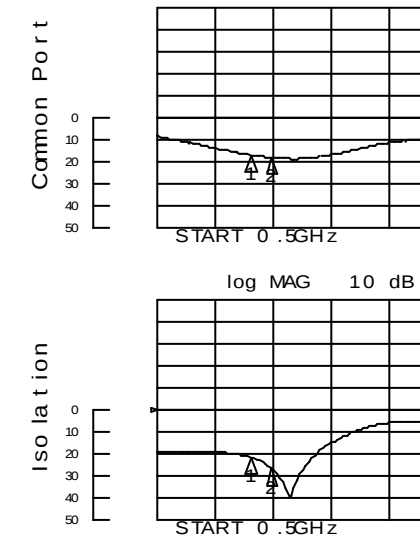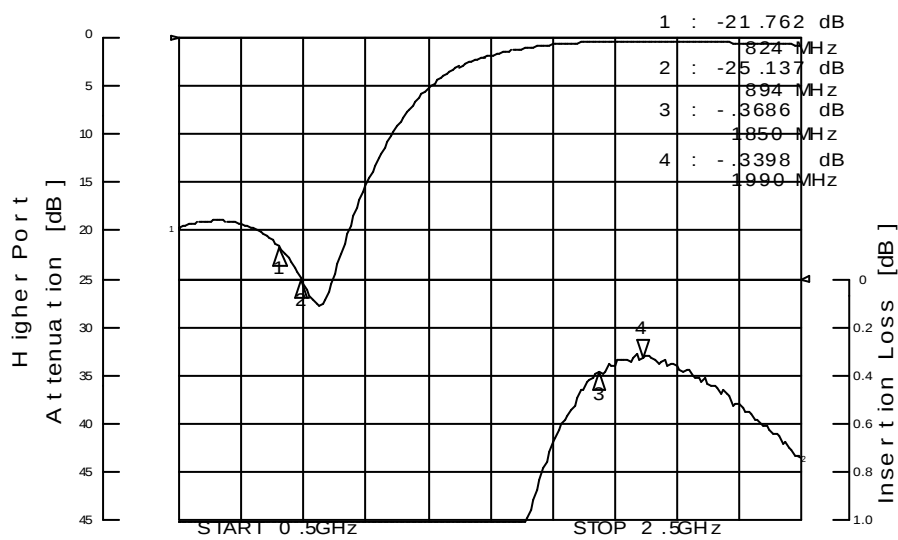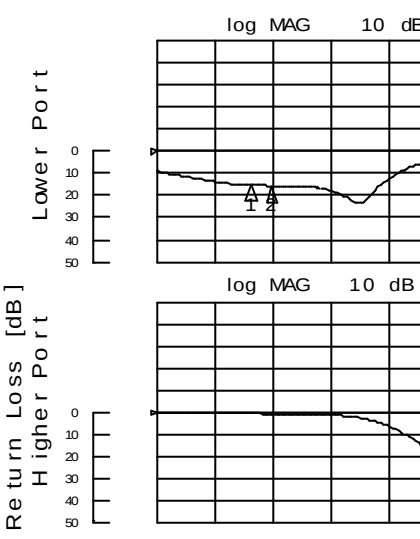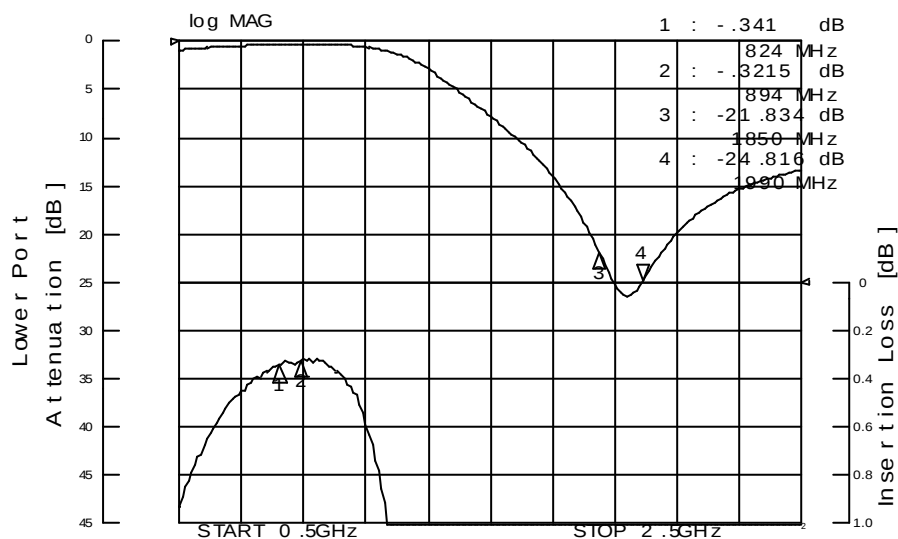

Foot Pattern

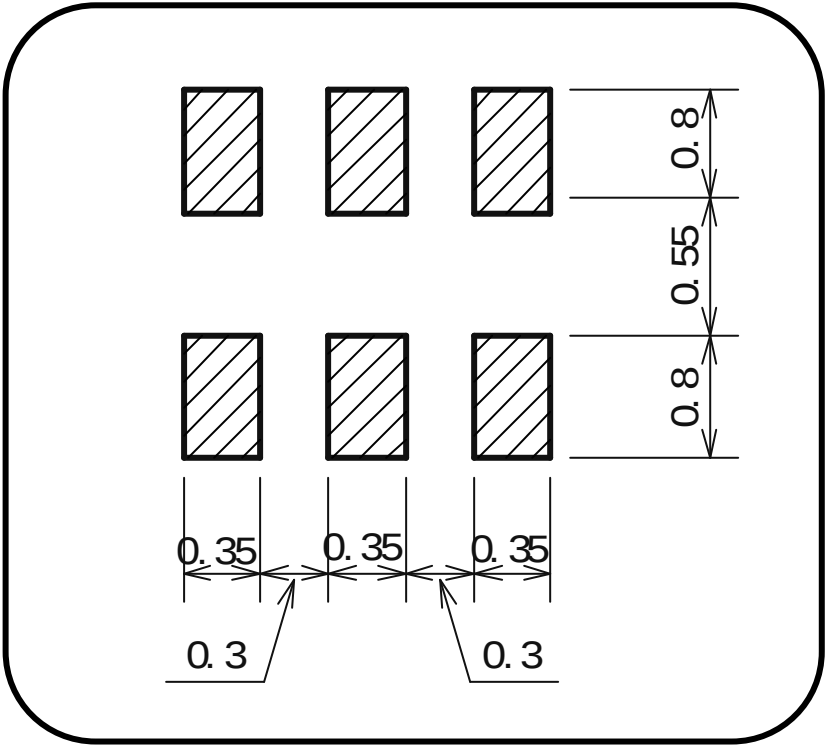

Foot Pattern

