



1. Dimensions:

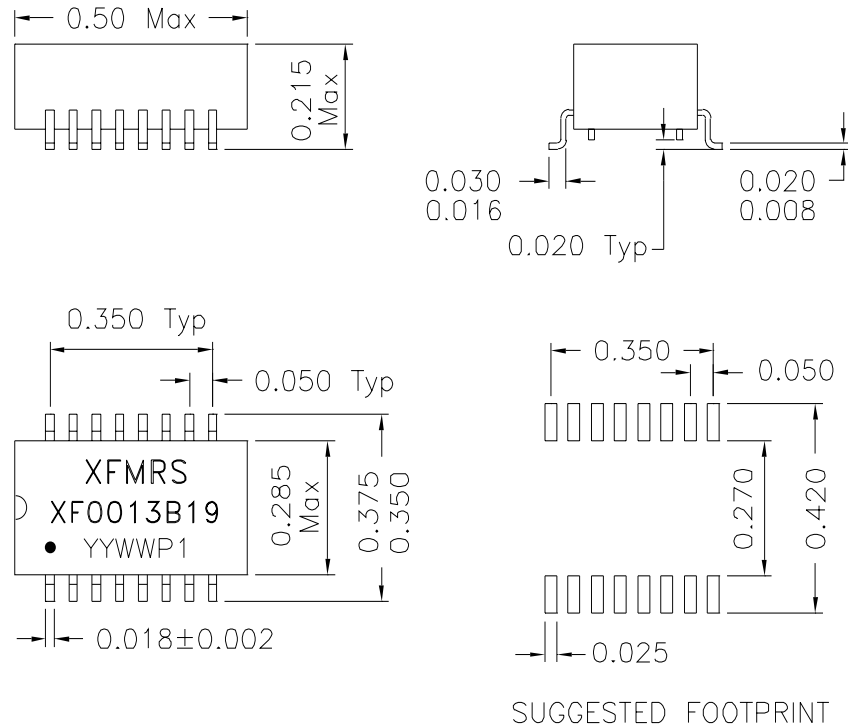

2. Schematic:

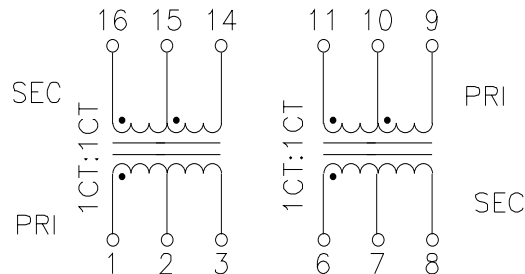

3. Electrical Specifications:@25°C

Isolation Voltage: 1500 VAC
 Turns Ratio: (1-2-3):(16-15-14)=1CT:1CT ±3%
 Turns Ratio: (6-7-8):(11-10-9)=1CT:1CT ±3%
 PRI OCL: 1.5mH Min @100KHz 50mV
 Cw/w: 45pF Maximum @100KHz 50mV (Pri/Sec)
 Leakage Inductance: 0.6uH Maximum @100KHz 50mV @PRI, WITH SEC SHORTED
 DC Resistance: 1.0 Ohms Maximum (each wdg)
 CROSSTALK (0.5-5MHz): -65dB Typ
 EXTENDED OPERATING TEMPERATURE: -40°C to +85°C

DOC. REV: A/1

XFMRS Inc UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in Inch SHEET 1 OF 1	Title: SMD T1/E1 ISOLATION MODULE	
	P/N: XF0013B19	REV. A
	DWN. 李清儿	Aug-08-97
	CHK. 孙悦	Aug-08-97
APP. Joe Huff	Aug-08-97	