


# SAW Bandpass Filter F9422

## Features

- EGSM applications
- Usable bandwidth of 35 MHz
- No impedance matching require for operation at 50 Ω
- Ceramic Surface Mounted Device Package ( 3.0 mm \* 3.0 mm )
- Single-ended Operation
- RoHS Compliant

## Package Dimensions

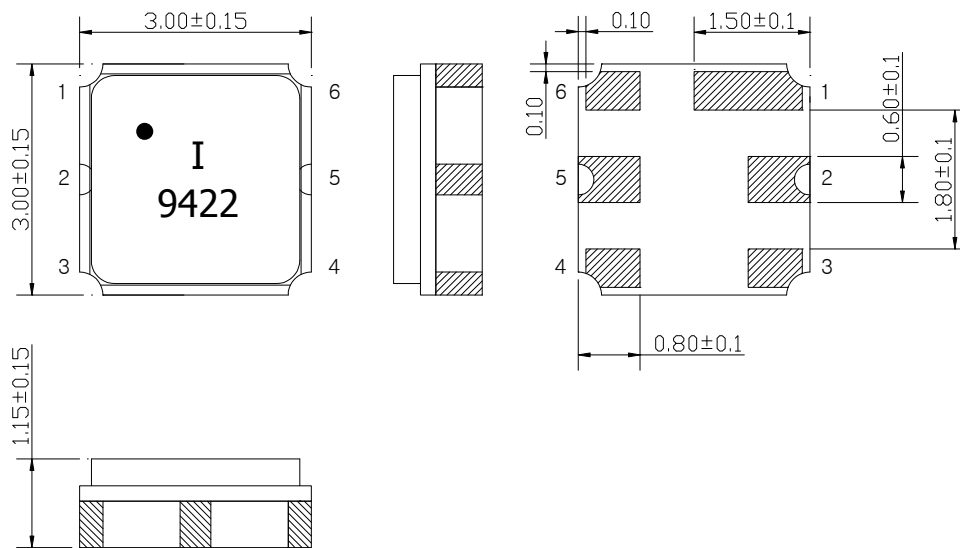

Dimensions shown are nominal in millimeters

Body : Al<sub>2</sub>O<sub>3</sub> Ceramic

Lid : Kovar, Ni Plated

Terminations : Au plating 0.3 ~ 1.0 um, Over a 1.27 ~ 8.89 um  
Ni Plating


### Pin Configurations

2	Input
5	Output
1, 3, 4, 6	Case ground

## Maximum Ratings

Parameters	Unit	Minimum	Typical	Maximum
Operating Temperature Range	℃	-30	25	85
Storage Temperature Range	℃	-40	-	85
Power Handling Capability	dBm	-	-	10

Electrostatics Sensitive Device (ESD)

	<b>ITF Co., Ltd.</b> 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F9422	
		Rev. Date	2008-09-23	
		Rev.	NC8008-AS01	1/7


# SAW Bandpass Filter F9422

## Specifications

	Minimum	Typical	Maximum	Unit
Center Frequency ( Fc )	-	942.5	-	MHz
Insertion Loss (In Fc +/- 17.5 MHz)	-	2.6	3.5	dB
Amplitude Ripple (In Fc +/- 17.5 MHz)	-	1.3	2.0	dBp-p
VSWR (In Fc +/- 17.5 MHz)	-	2.3	2.8	
Relative Attenuation				
DC ~ 100.0 MHz	30.0	33.0	-	dB
100.0 MHz ~ 800.0 MHz	23.0	28.0	-	
800.0 MHz ~ 890.0 MHz	28.0	31.0	-	
890.0 MHz ~ 905.0 MHz	35.0	41.0	-	
905.0 MHz ~ 915.0 MHz	7.0	22.0	-	
980.0 MHz ~ 1000.0 MHz	20.0	33.0	-	
1000.0 MHz ~ 1550.0 MHz	30.0	33.0	-	
1550.0 MHz ~ 1950.0 MHz	25.0	33.0	-	
1950.0 MHz ~ 2800.0 MHz	20.0	25.0	-	
1950.0 MHz ~ 3000.0 MHz	15.0	23.0	-	
Temperature Range (Operational)	-30	25	85	°C
Input RF Power (In Fc +/- 17.5 MHz)			10	dBm
Input/Output Impedance		50		Ohms

### Notes :

- 1) All specifications are based on the matching schematic shown below, measured by Agilent Network analyzer and full 2 port calibration.
- 2) Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances
- 3) All attenuation measurements are measured relative to insertion loss


	<b>ITF Co., Ltd.</b> 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F9422	
		Rev. Date	2008-09-23	
		Rev.	NC8008-AS01	2/7

# SAW Bandpass Filter F9422

---

## Matching Schematic

( Actual matching values may vary due to PCB layout and parasitics )



## Marking Configuration


- 1)  
●
- 2)  
I<sup>2</sup>
- 3)  
9422<sup>3)</sup>

1) Pad Number 1 Index

2) Manufacturer name



3) Marking Number


\* Ink or Laser Marking available

	<b>ITF Co., Ltd.</b> 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F9422	
		Rev. Date	2008-09-23	
		Rev.	NC8008-AS01	3/7

# SAW Bandpass Filter F9422



## Typical Performance ( at 25°C )

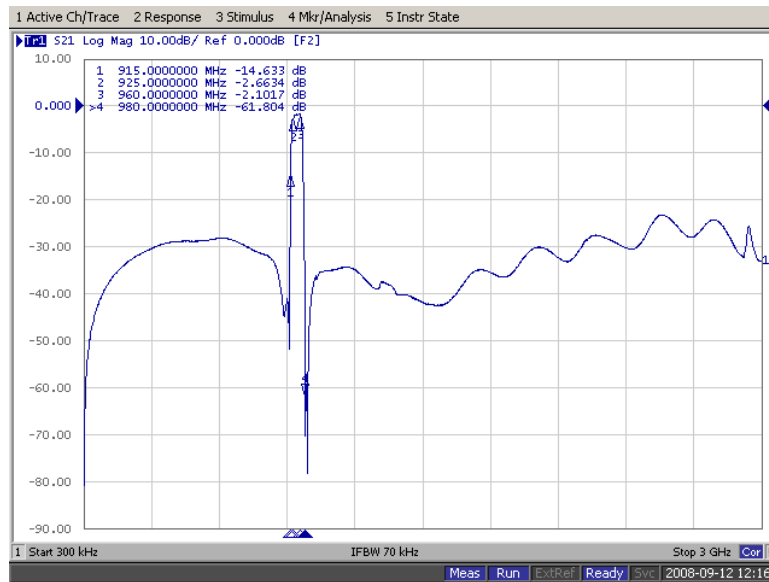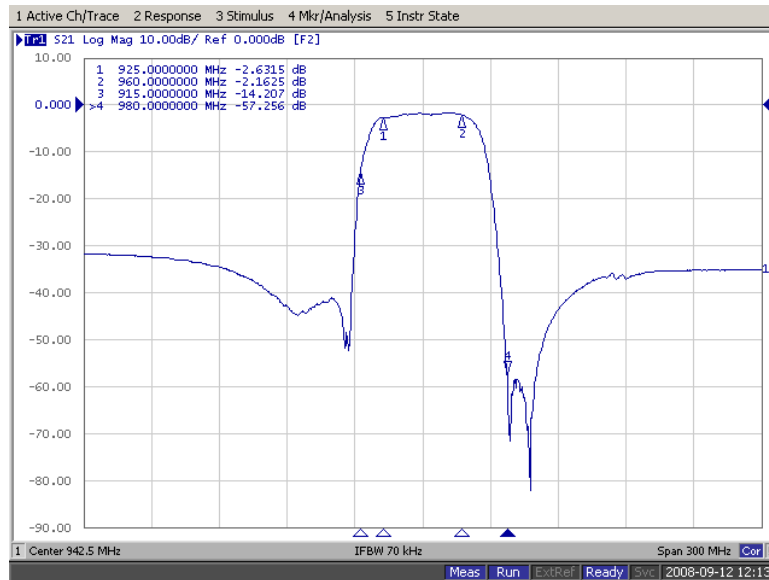



	<b>ITF Co., Ltd.</b> 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F9422	
		Rev. Date	2008-09-23	
		Rev.	NC8008-AS01	4/7


# SAW Bandpass Filter F9422

## Input / Output VSWR Charts

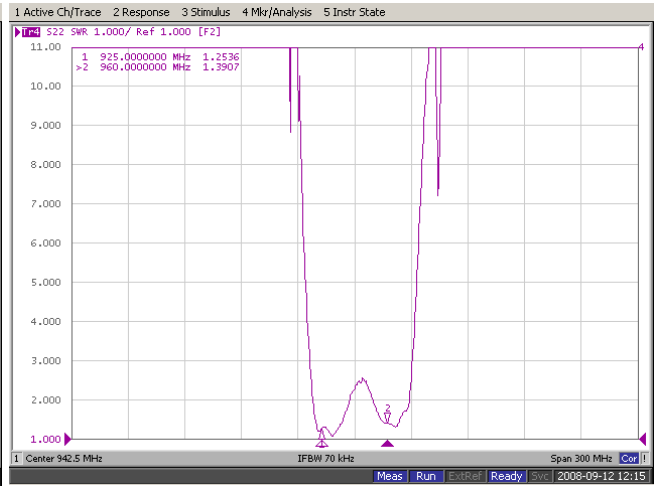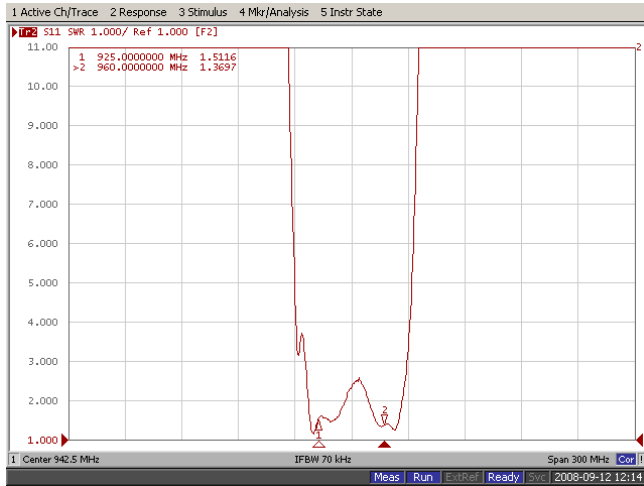

## Input / Output Smith Charts

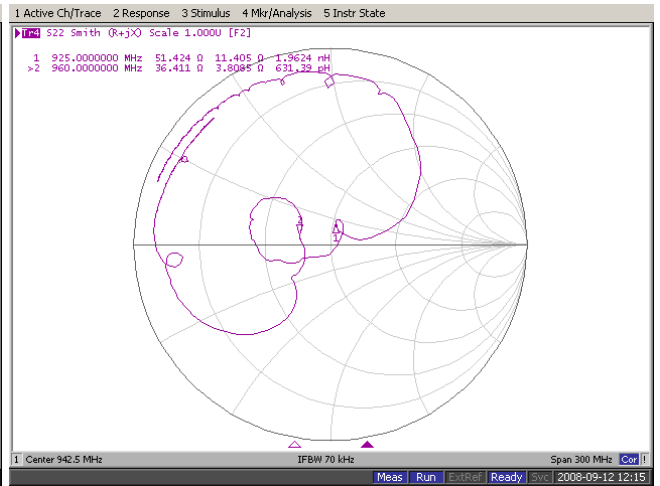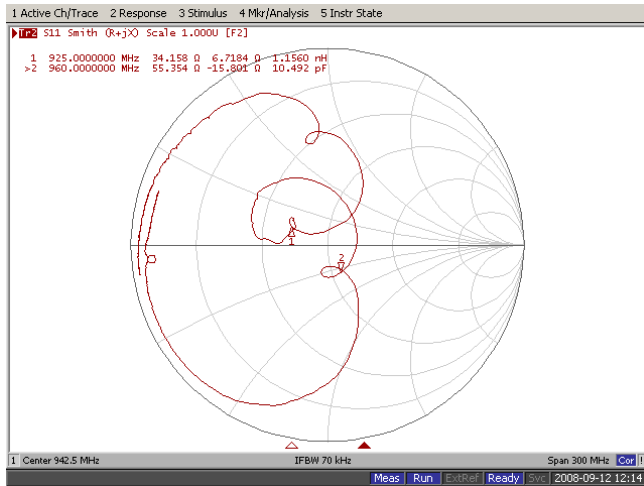


	<b>ITF Co., Ltd.</b> 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F9422	
		Rev. Date	2008-09-23	
		Rev.	NC8008-AS01	5/7

# SAW Bandpass Filter F9422


## Packing Specification

1. Reeling Quantity : 3000 pcs / 13" reel ( or 1000 pcs / 7" reel )
2. Taping Structure : The tape shall be wound around the reel in the direction shown below.

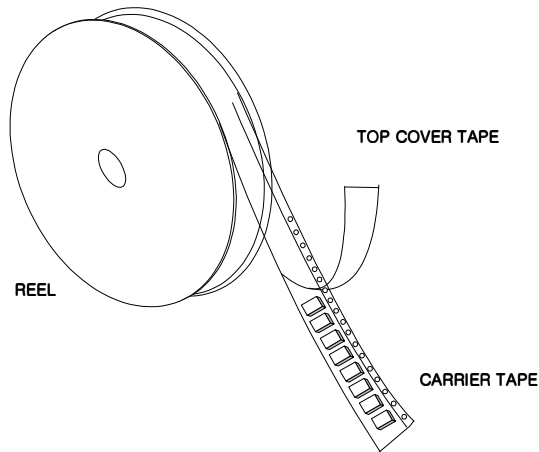

## Tape Specification

1. Leader part and vacant position specification

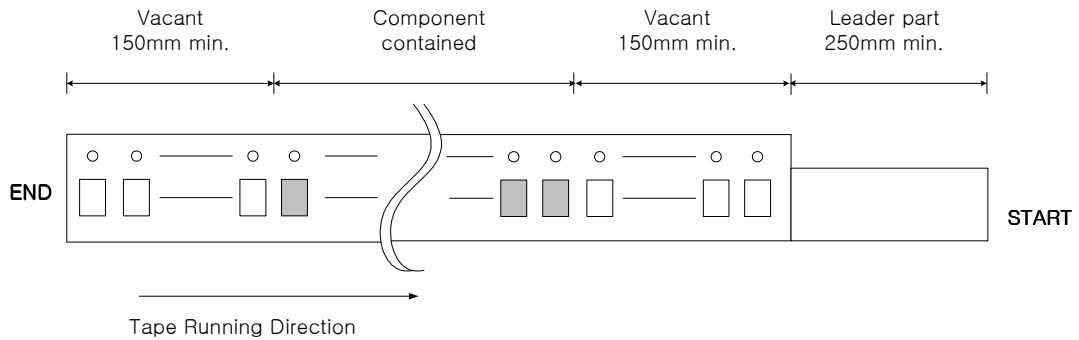



2. Tensile strength of carrier tape

4.4N/mm width

3. Top cover tape adhesion


- 1) pull off angle : 0~15°
- 2) speed : 300mm/min
- 3) force : 20~70g

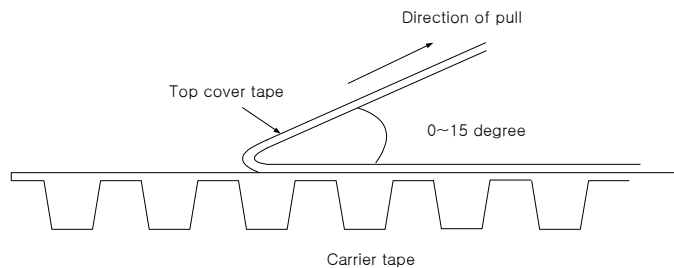

	<b>ITF Co., Ltd.</b> 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F9422	
		Rev. Date	2008-09-23	
		Rev.	NC8008-AS01	6/7


# SAW Bandpass Filter F9422

## Carrier Tape Dimensions [unit : mm]

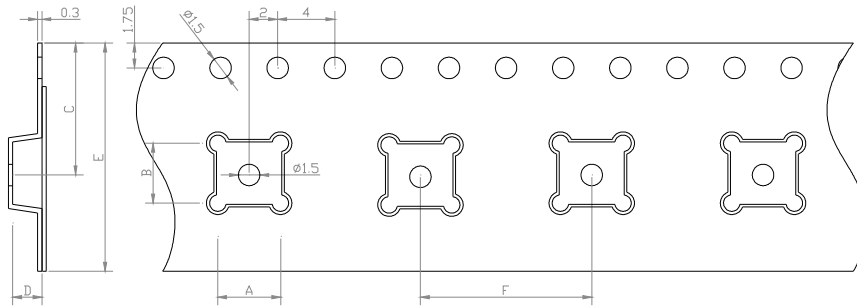



A	3.40 ± 0.1
B	3.40 ± 0.1
C	7.25 ± 0.1
D	1.70 ± 0.1
E	12.00 ± 0.1
F	8.00 ± 0.1

## Part Direction

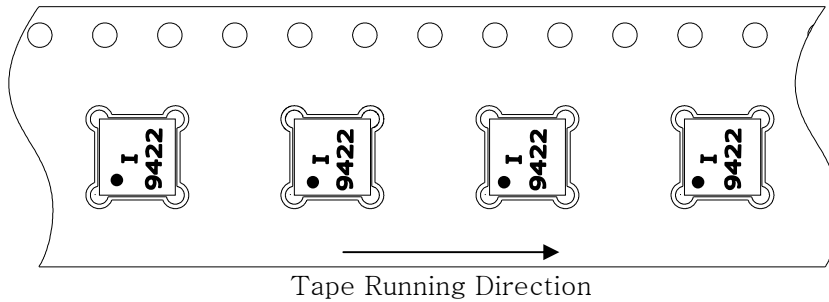

## Reel Dimensions [unit : mm]

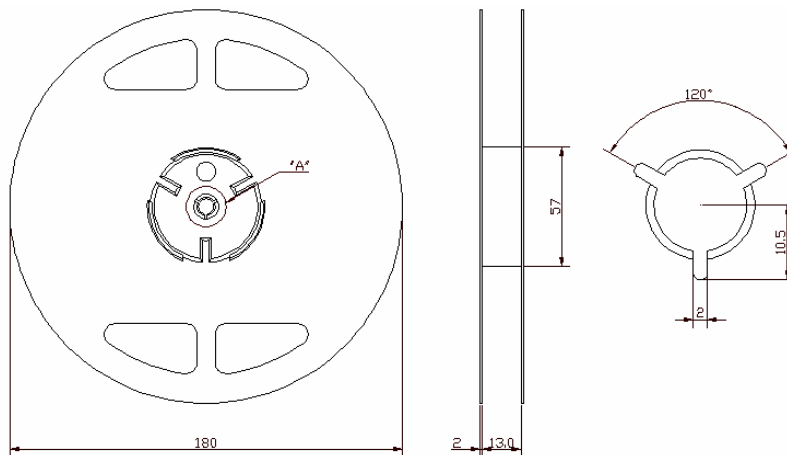

	<b>ITF Co., Ltd.</b> 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F9422	
		Rev. Date	2008-09-23	
		Rev.	NC8008-AS01	7/7