

# A 1060

**Features:**

- T0-18 metal-glass housing
- low temperature coefficient
- high linearity

**Application:**

- oil burner control
- exposure meters
- automatic dimmers



# A 1072

**Features:**

- T0-18 metal glass housing
- low interference voltage
- fast response

**Application:**

- pulse counters
- A/D transducers
- digital counters

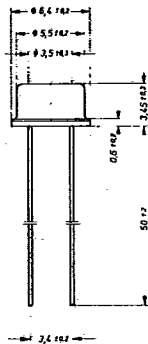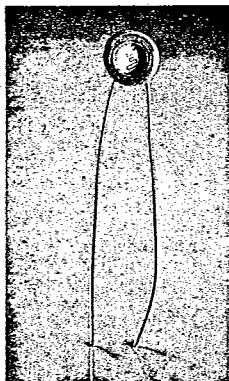

TYP	R <sub>10</sub> [kΩ]	R <sub>100</sub> [kΩ]	R <sub>01</sub> [kΩ]	R <sub>05</sub> [kΩ]	V <sub>max</sub> [V]	P <sub>max</sub> [mW]	t <sub>an</sub> [ms]	t <sub>ab</sub> [ms]	TK [%K]
A 1060 11	10,9	2,8	50	150	200	75	60	35	0,3
1060 12	18,4	3,8	150	390	200	75	50	30	0,35
1060 13	44	6,2	450	1.350	200	75	35	28	0,4
1060 31	80	21,5	360	1.080	350	75	60	35	0,3
1060 32	135	30,5	1.000	3.000	350	75	50	30	0,35
A 1072 11*	25	4,7	350	1.050	100	50	10	10	2
1072 12*	90	9,2	3.500	10.500	100	50	10	10	2
1072 13*	320	19	70.000	100.000	100	50	7	10	2

\*available on request and with higher quantities only

