

## 100VAC Input/12VDC (100mA) Output

# Non-Isolated AC/DC Converter BP5034D12

### Absolute Maximum Ratings


Parameter	Symbol	Limits	Unit
Input voltage	Vi	195	V
Output current	lo	100	mApk
ESD endurance	Vsurge	2	kV
Operating temperature range	Topr	-25 to +80	°C
Storage temperature range	Tstg	-25 to +105	°C

#### Electrical Characteristics

Parameter	Symbol	Min.	Тур.	Max.	Unit	Conditions	
Input voltage range	Vi	113	141	195	V	DC(80 to 138VAC level)	
Output voltage	Vo	11	12	12.8	V	Vi=141V, Io=50mA	
Output current	lo	0	-	100	mA	Vi=141V .	
Line regulation	Vr	-	0.02	0.1	V	Vi=113 to 195V, Io=50mA	
Load regulation	VI	-	0.05	0.15	V	Vi=141V, Io=0 to 50mA *2	
Output ripple voltage	Vp	-	0.05	0.15	Vp-p	Vi=141V, lo=50mA	
Power conversion efficiency	(η	60	68	-	%	Vi=141V, Io=100mA	

\*1 The max output is changed due to the ambient temperature. Please refer to note regarding derating curve. \*2 Please refer to Conversion efficiency.

### Application Circuit

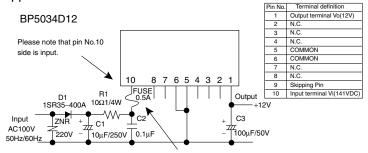


Be sure to use fuse for safety.

Please verify operation and characteristics in the customer's circuit before actual usage and ensure that the load current does not exceed 0.1A.


#### External Component Specifications

FUSE: Fuse	Use a fuse of 0.5A
C1 : Input smoothing capacitor	Capacitance : 3.3 to $22\mu F$ Ripple current is 0.13Arms or above. Rated voltage : 200V or higher
C2 : Noise reduction capacitor	$\label{eq:capacitance:0.1 to 0.22 \mu F} \mbox{ Rated voltage: 200V or higher} \\ \mbox{Use a film or ceramic capacitor. Evaluate under actual operating conditions.}$
C3 : Output smoothing capacitor	Capacitance : 100 to $470\mu$ F Rated voltage : 25V or higher, low impedance Impedance is $0.39\Omega$ max at high frequencies. Ripple current is 0.1Arms or above. Capacitance impedance affects the output ripple voltage.
D1 : Rectifier diode	In the absolute maximum ratings, the reverse surge voltage should be 400V or higher, the average rectifying current should be 0.5A or higher, and the forward surge current should be 20A or higher.
R1 : Noise reduction resistor	10 to $22\Omega$ 1/4W Determine the ideal value through actual testing.
ZNR : Varistor	A varistor must be used to protect against lightning surges and static electricity.


### • Dimensions (Unit : mm)



### Derating curve



Switching Frequency




### Conversion Efficiency

	80	C	Conversi (Ta=25°	on Effic C, Vi=1	iency 41V)		
0	70						
5	60						
Ð	50	/	60%	Min-Li	ne		
	80 70 60 50 40	7					
=	20	1					
S	20	7					
Ð	10	1					
3	30 20 10 0						
	Č	) 2	0 4	0 6	0 8	30	100
			Output	Current	lo(mA)		

### Load Regulation

13.0		Load (Ta=25)	Regula C, Vi=1	tion 41V)		
- 12.8						
12.8 12.6 12.4 12.4 12.2 12.0 11.8 11.6 11.4 11.4 11.4 11.2						
> 12.4						
B 12.2						
₫ 12.0				-	-	
\$ 11.8			<u> </u>			
5 11.6						
<u></u> 11.4						
Ō 11.2						
11.0						
(	0 2				30 100	)
		Output	Current	lo(mA)		

Surface Temperature Increase



## **Power Module Usage Precautions**

## Safety Precautions

- 1) The products are designed and manufactured for use in ordinary electronic equipment (i.e. AV/OA/ telecommunication/amusement equipment, home appliances). Please consult with the Company's (ROHM) sales staff if intended for use in devices requiring high reliability (e.g. medical/transport/ aircraft/spacecraft equipment, nuclear power/fuel controllers, automotive/safety devices) and whose malfunction may result in injury or death. In this case, failsafe measures must be taken, including the following:
  - [a] Installation of protection circuits in order to improve system safety
  - [b] Incorporation of redundant circuits in the case of single-circuit failure
- 2) The products are designed for use under normal conditions. Application in special environments can cause a deterioration in product performance. Therefore, verification and confirmation of product performance, prior to use, is recommended. The following environments are considered to be 'special':

   [a] Outdoors, exposed to direct sunlight or dust
  - [b] In contact with liquids, such as water, oils, chemicals, or organic solvents
  - [c] In areas where exposure to the sea air or corrosive gases (i.e. Cl<sub>2</sub>, H<sub>2</sub>S, NH<sub>3</sub>, SO<sub>2</sub>, NO<sub>2</sub>) can occur
  - [d] In places where the products may be in contact with static electricity or electromagnetic waves
  - [e] In proximity to heat-producing items, plastic cords, or flammable materials
  - [f] In contact with sealing or coating products, such as resin
  - [g] In contact with unclean solder or exposed to water or water-soluble cleaning agents used after soldering
  - [h] In areas where dew condensation occurs
- 3) The products are not designed to be radiation resistant
- 4) The Company is not responsible for any problems resulting from use of the products under conditions not recommended herein.
- 5) The Company should be notified of any product safety issues. Moreover, product safety issues should be periodically monitored by the customer.

## Application Notes

- 1) A sufficient margin must be allowed if changes are made to the peripheral circuit due to variations in the inherent tolerances of the external components as well as transient and static characteristics. In addition, please be aware that the Company has not conducted investigations on whether or not particular changes in the example application circuits would result in patent infringement.
- 2) The application examples, their constants, and other types of information contained herein are applicable only when the products are used in accordance with standard methods.

Therefore, if mass production is intended, sufficient consideration to external conditions must be made.

## Notes Regarding Industrial Property

- 1) The specifications included herein contain information related to the Company's industrial property. Their use other than pertaining to the relevant products is forbidden. Duplication and/or disclosure to a third party without express written permission is strictly prohibited.
- 2) Product information and data, including application examples, contained in the specifications are for reference purposes only; the Company does not guarantee the industrial/intellectual property rights or any other rights of a third party. Accordingly, the Company shall not bear responsibility for:
  [a] Infringement of the intellectual property rights of a third party
  [b] Problems arising from the use of the products listed herein
- 3) The Company prohibits the purchaser from exercising or using the intellectual/industrial property rights or any rights belonging to or are controlled by the Company, other than the right to use, sell, or dispose of the products.

## **Power Module Usage Precautions**

## Safety Precautions

- 1) The products are designed and manufactured for use in ordinary electronic equipment (i.e. AV/OA/ telecommunication/amusement equipment, home appliances). Please consult with the Company's (ROHM) sales staff if intended for use in devices requiring high reliability (e.g. medical/transport/ aircraft/spacecraft equipment, nuclear power/fuel controllers, automotive/safety devices) and whose malfunction may result in injury or death. In this case, failsafe measures must be taken, including the following:
  - [a] Installation of protection circuits in order to improve system safety
  - [b] Incorporation of redundant circuits in the case of single-circuit failure
- 2) The products are designed for use under normal conditions. Application in special environments can cause a deterioration in product performance. Therefore, verification and confirmation of product performance, prior to use, is recommended. The following environments are considered to be 'special':

   [a] Outdoors, exposed to direct sunlight or dust
  - [b] In contact with liquids, such as water, oils, chemicals, or organic solvents
  - [c] In areas where exposure to the sea air or corrosive gases (i.e. Cl<sub>2</sub>, H<sub>2</sub>S, NH<sub>3</sub>, SO<sub>2</sub>, NO<sub>2</sub>) can occur
  - [d] In places where the products may be in contact with static electricity or electromagnetic waves
  - [e] In proximity to heat-producing items, plastic cords, or flammable materials
  - [f] In contact with sealing or coating products, such as resin
  - [g] In contact with unclean solder or exposed to water or water-soluble cleaning agents used after soldering
  - [h] In areas where dew condensation occurs
- 3) The products are not designed to be radiation resistant
- 4) The Company is not responsible for any problems resulting from use of the products under conditions not recommended herein.
- 5) The Company should be notified of any product safety issues. Moreover, product safety issues should be periodically monitored by the customer.

## Application Notes

- 1) A sufficient margin must be allowed if changes are made to the peripheral circuit due to variations in the inherent tolerances of the external components as well as transient and static characteristics. In addition, please be aware that the Company has not conducted investigations on whether or not particular changes in the example application circuits would result in patent infringement.
- 2) The application examples, their constants, and other types of information contained herein are applicable only when the products are used in accordance with standard methods.

Therefore, if mass production is intended, sufficient consideration to external conditions must be made.

## Notes Regarding Industrial Property

- 1) The specifications included herein contain information related to the Company's industrial property. Their use other than pertaining to the relevant products is forbidden. Duplication and/or disclosure to a third party without express written permission is strictly prohibited.
- 2) Product information and data, including application examples, contained in the specifications are for reference purposes only; the Company does not guarantee the industrial/intellectual property rights or any other rights of a third party. Accordingly, the Company shall not bear responsibility for:
  [a] Infringement of the intellectual property rights of a third party
  [b] Problems arising from the use of the products listed herein
- 3) The Company prohibits the purchaser from exercising or using the intellectual/industrial property rights or any rights belonging to or are controlled by the Company, other than the right to use, sell, or dispose of the products.

	copying or reproduction of this document, in part or in whole, is permitted without the nsent of ROHM Co.,Ltd.
The	e content specified herein is subject to change for improvement without notice.
"Pr	e content specified herein is for the purpose of introducing ROHM's products (hereinafte oducts"). If you wish to use any such Product, please be sure to refer to the specifications ich can be obtained from ROHM upon request.
illu	amples of application circuits, circuit constants and any other information contained herein strate the standard usage and operations of the Products. The peripheral conditions mus taken into account when designing circuits for mass production.
Ho	eat care was taken in ensuring the accuracy of the information specified in this document wever, should you incur any damage arising from any inaccuracy or misprint of such prmation, ROHM shall bear no responsibility for such damage.
exa imp oth	e technical information specified herein is intended only to show the typical functions of an amples of application circuits for the Products. ROHM does not grant you, explicitly o plicitly, any license to use or exercise intellectual property or other rights held by ROHM and er parties. ROHM shall bear no responsibility whatsoever for any dispute arising from the e of such technical information.
equ	e Products specified in this document are intended to be used with general-use electronic upment or devices (such as audio visual equipment, office-automation equipment, commu ation devices, electronic appliances and amusement devices).
The	e Products specified in this document are not designed to be radiation tolerant.
	ile ROHM always makes efforts to enhance the quality and reliability of its Products, a oduct may fail or malfunction for a variety of reasons.
aga fail sha	ase be sure to implement in your equipment using the Products safety measures to guard ainst the possibility of physical injury, fire or any other damage caused in the event of the ure of any Product, such as derating, redundancy, fire control and fail-safe designs. ROHM all bear no responsibility whatsoever for your use of any Product outside of the prescribed ope or not in accordance with the instruction manual.
sys ma ins cor of	e Products are not designed or manufactured to be used with any equipment, device o stem which requires an extremely high level of reliability the failure or malfunction of which y result in a direct threat to human life or create a risk of human injury (such as a medica trument, transportation equipment, aerospace machinery, nuclear-reactor controller, fuel- ntroller or other safety device). ROHM shall bear no responsibility in any way for use of any the Products for the above special purposes. If a Product is intended to be used for any ch special purpose, please contact a ROHM sales representative before purchasing.
be	rou intend to export or ship overseas any Product or technology specified herein that may controlled under the Foreign Exchange and the Foreign Trade Law, you will be required to tain a license or permit under the Law.



Thank you for your accessing to ROHM product informations. More detail product informations and catalogs are available, please contact us.

## ROHM Customer Support System

http://www.rohm.com/contact/