

SHINDENGEN

Schottky Rectifiers (SBD)

Single

D3S4M

40V 3A

FEATURES

- T_j 150°C
- P_{RRSM} avalanche guaranteed
- 1.4 ϕ lead


APPLICATION

- Switching power supply
- DC/DC converter
- Home Appliances, Office Equipment
- Telecommunication

OUTLINE DIMENSIONS

Case : AX14

Unit : mm

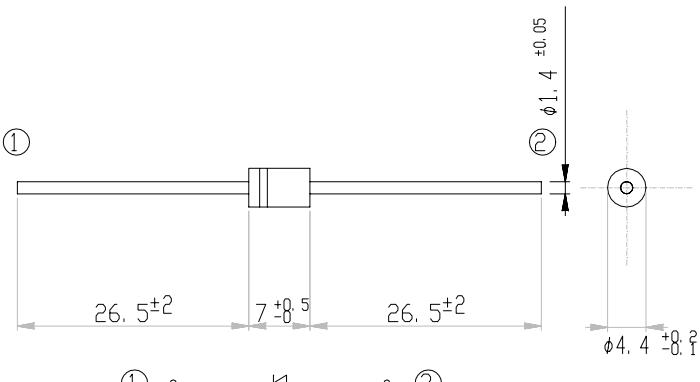

RATINGS

● Absolute Maximum Ratings (If not specified $T_I=25^\circ\text{C}$)


Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	T_{STG}		-40~150	°C
Operating Junction Temperature	T_j		150	°C
Maximum Reverse Voltage	V_{RM}		40	V
Repetitive Peak Surge Reverse Voltage	V_{RRSM}	Pulse width 0.5ms, duty 1/40	45	V
Average Rectified Forward Current	I_o	50Hz sine wave, R-load With heatsink $T_a=63^\circ\text{C}$	3	A
		50Hz sine wave, R-load Without heatsink $T_a=58^\circ\text{C}$	2	
Peak Surge Forward Current	I_{FSM}	50Hz sine wave, Non-repetitive 1 cycle peak value, $T_j=125^\circ\text{C}$	80	A
Repetitive Peak Surge Reverse Power	P_{RRSM}	Pulse width 10 μs , $T_j=25^\circ\text{C}$	330	W

● Electrical Characteristics (If not specified $T_I=25^\circ\text{C}$)

Item	Symbol	Conditions	Ratings	Unit
Forward Voltage	V_F	$I_F=3\text{A}$, Pulse measurement	Max 0.55	V
Reverse Current	I_R	$V_R=V_{RM}$, Pulse measurement	Max 3.5	mA
Junction Capacitance	C_j	$f=1\text{MHz}$, $V_R=10\text{V}$	Typ 150	pF
Thermal Resistance	θ_{jl}	junction to lead	Max 6.5	°C/W
	θ_{ja}	junction to ambient On glass-epoxy substrate junction to ambient With heatsink (20mm×20mm×1mm)	Max 64 Max 36	


D3S4M

Forward Voltage

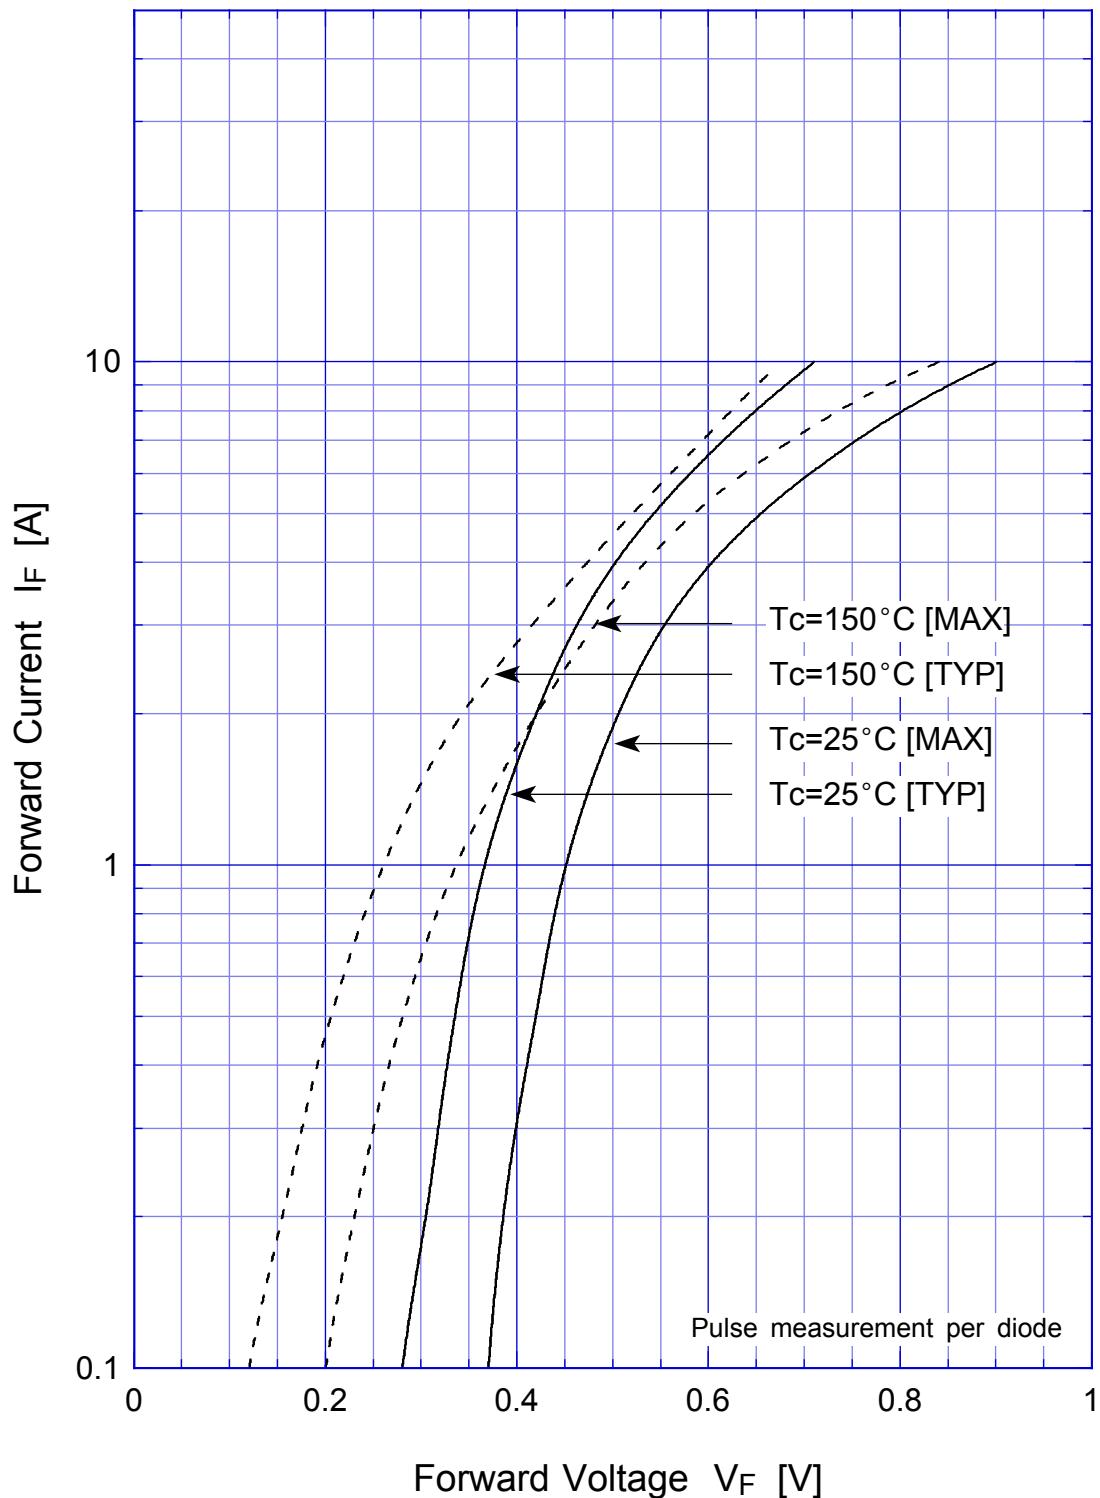




D3S4M



Reverse Power Dissipation


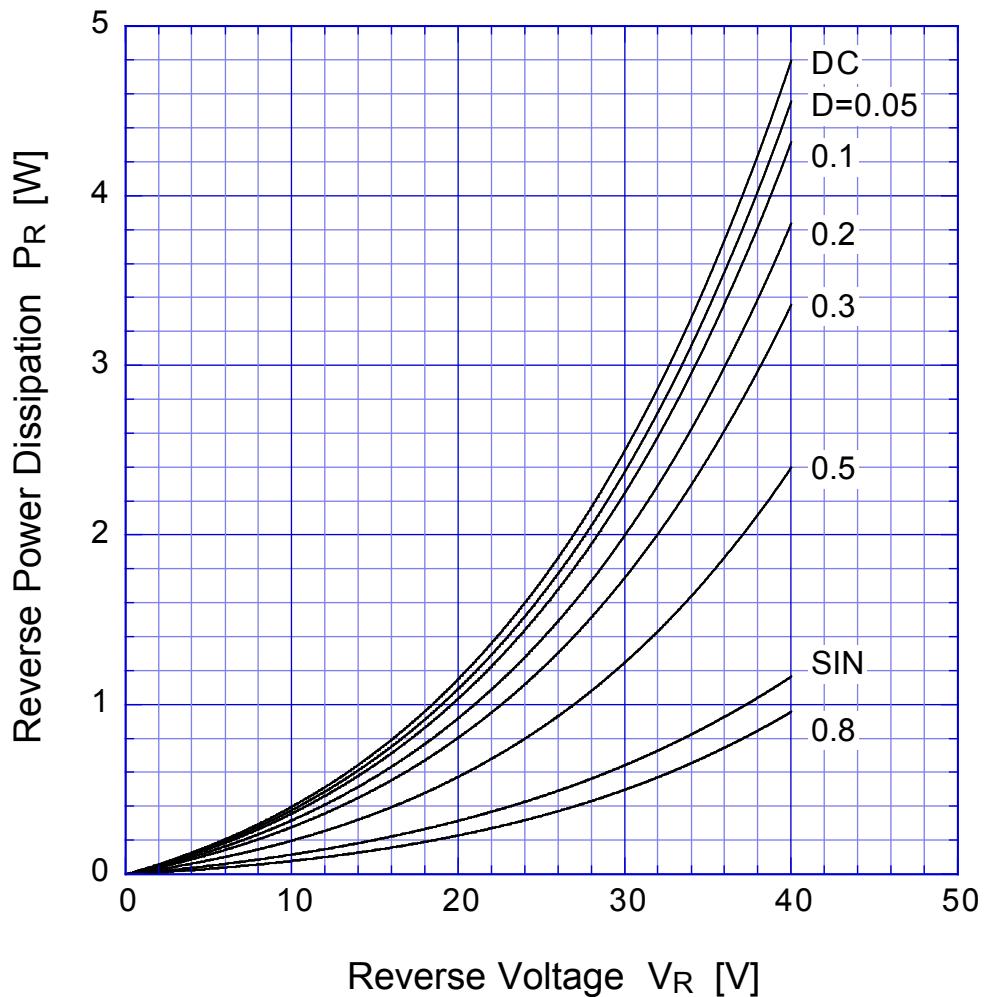




$T_j = 150^\circ\text{C}$

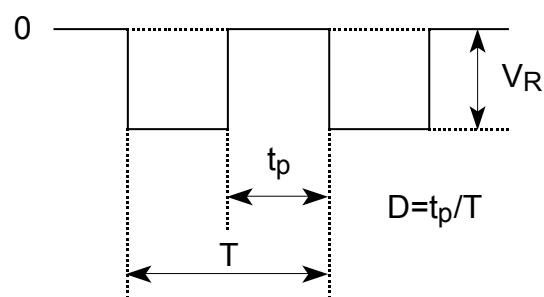

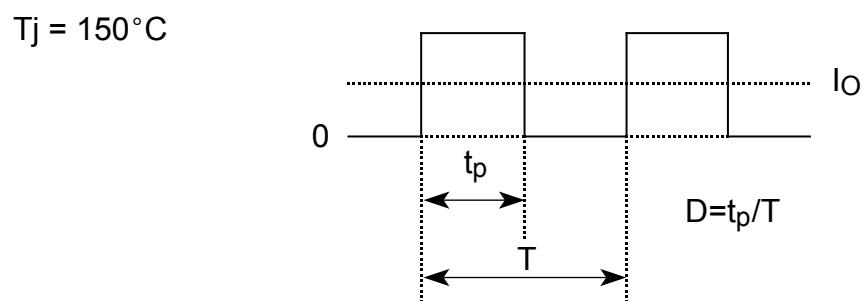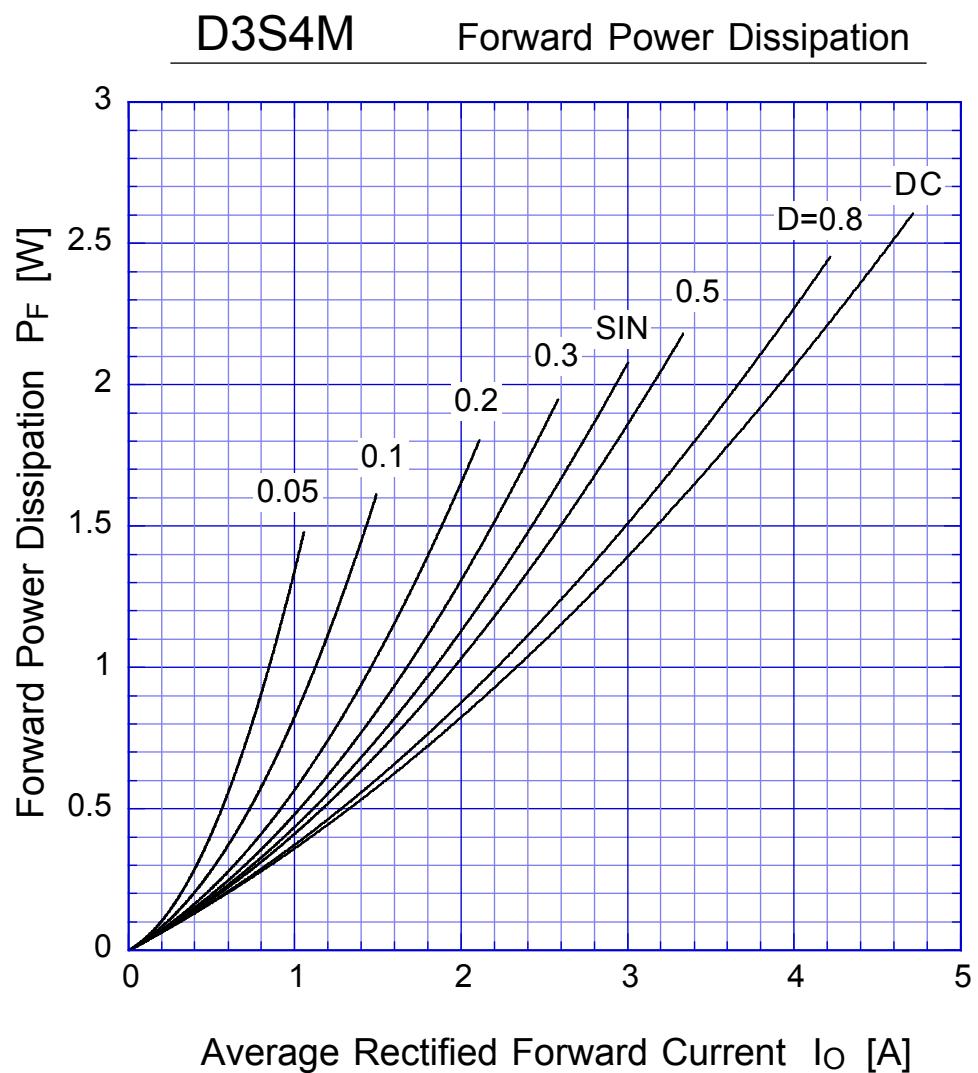

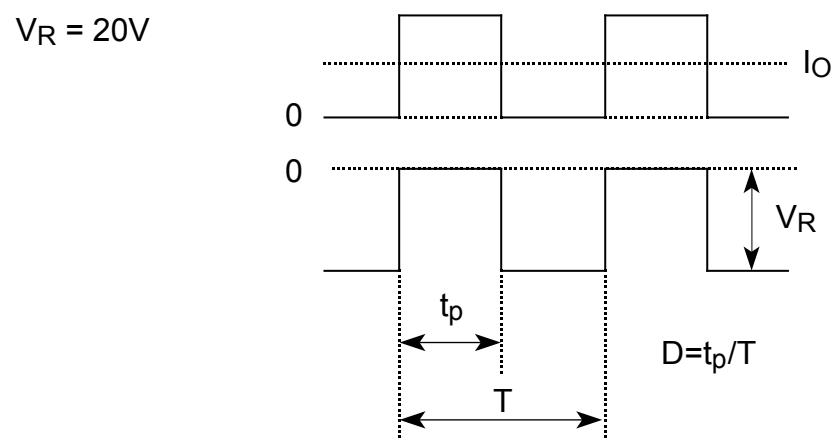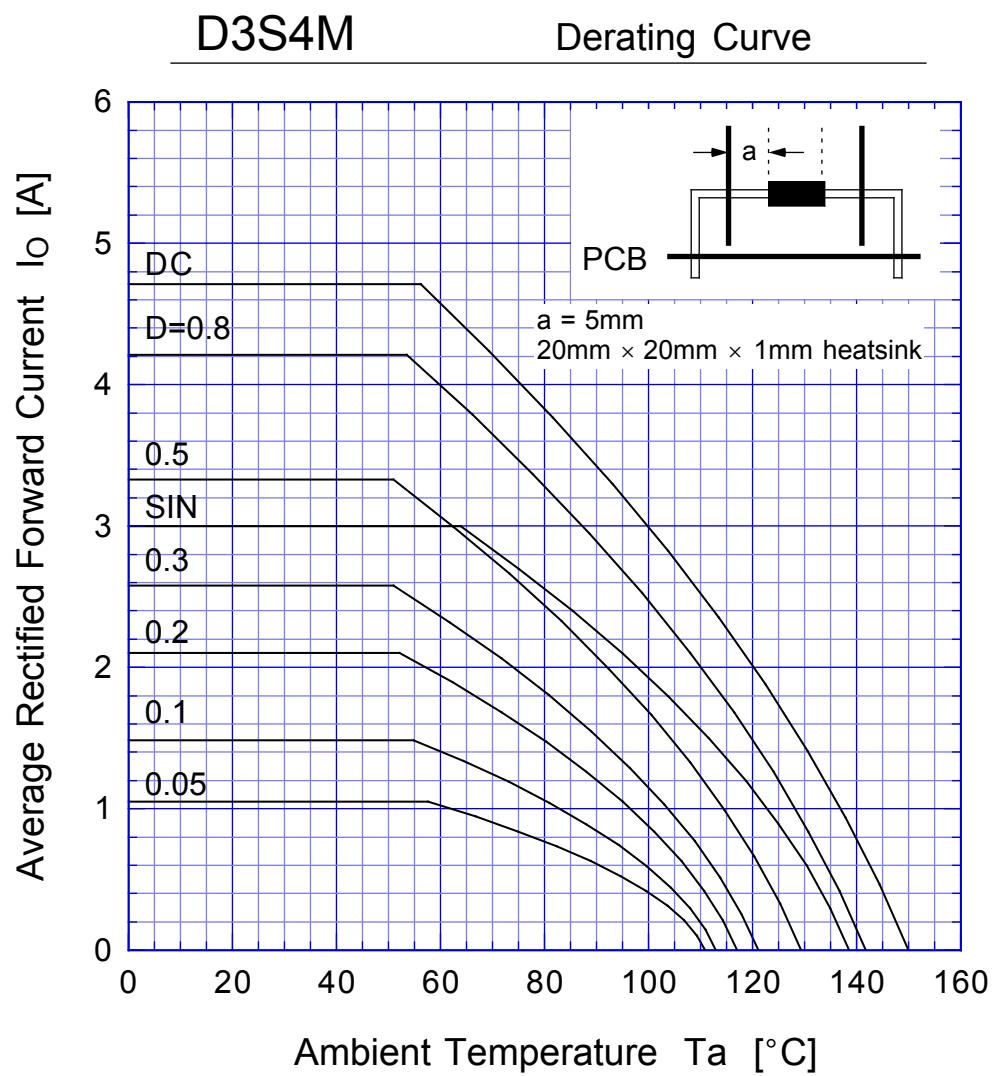


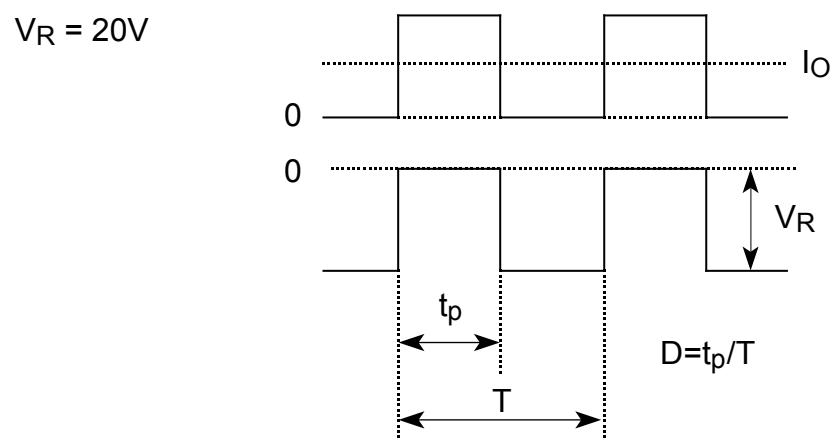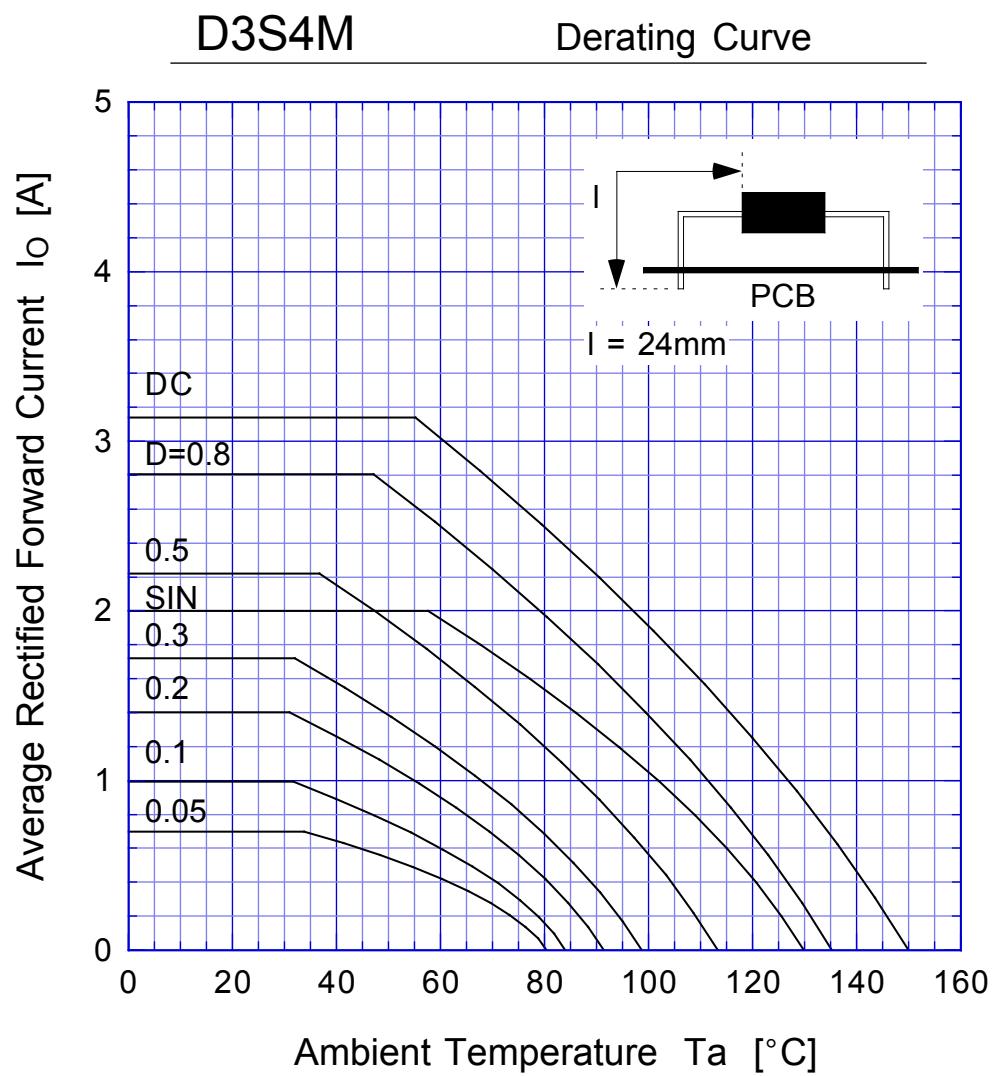

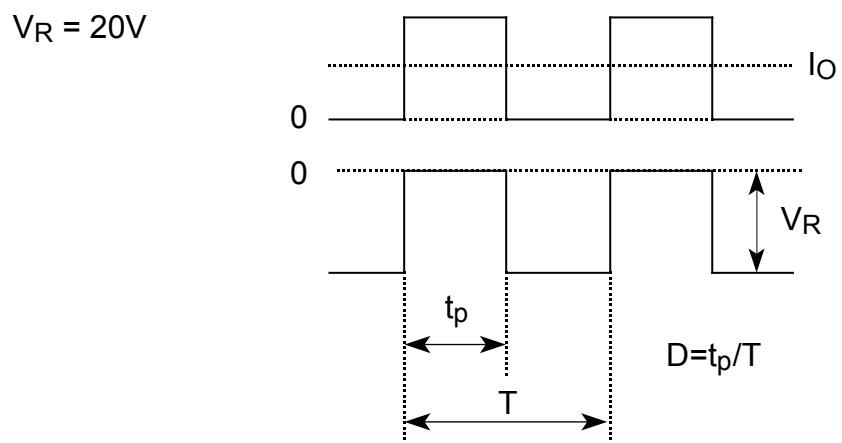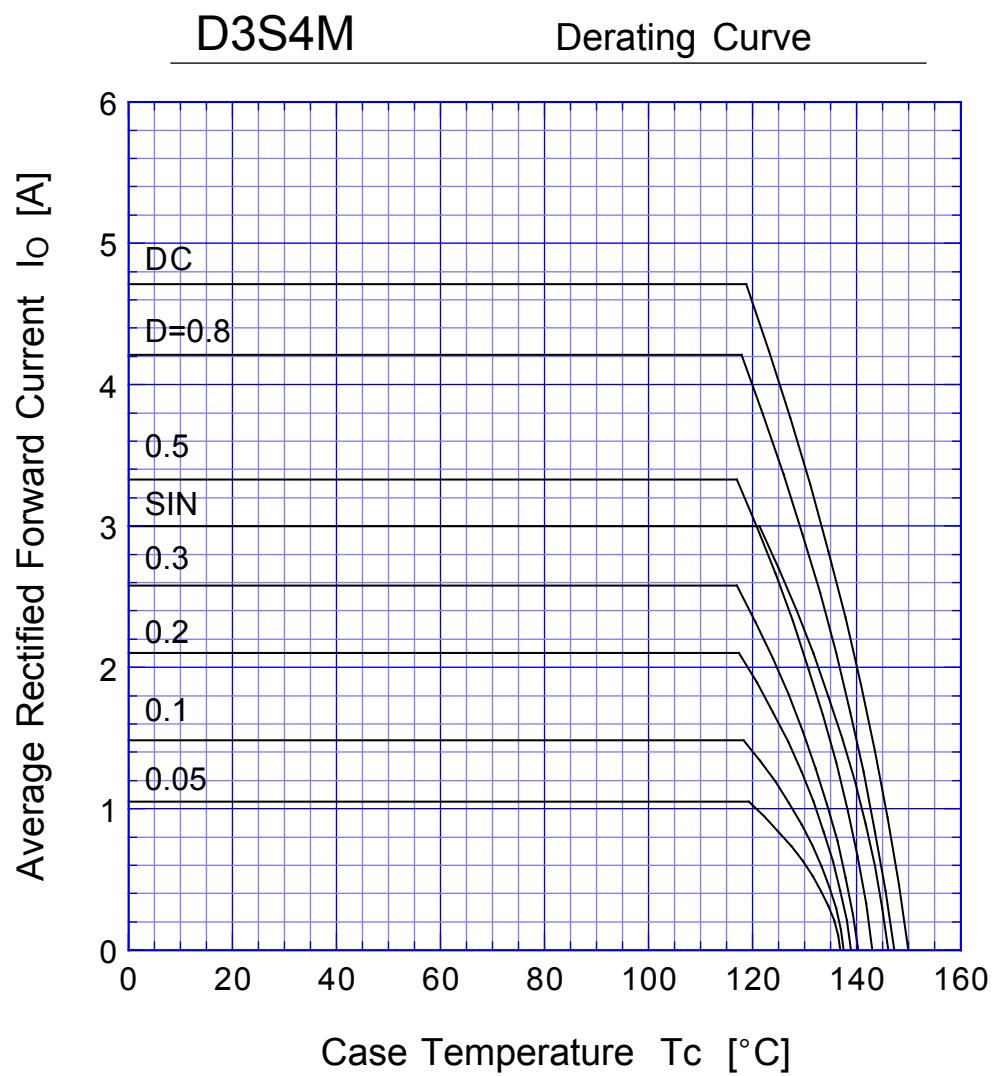


D3S4M

Peak Surge Forward Capability

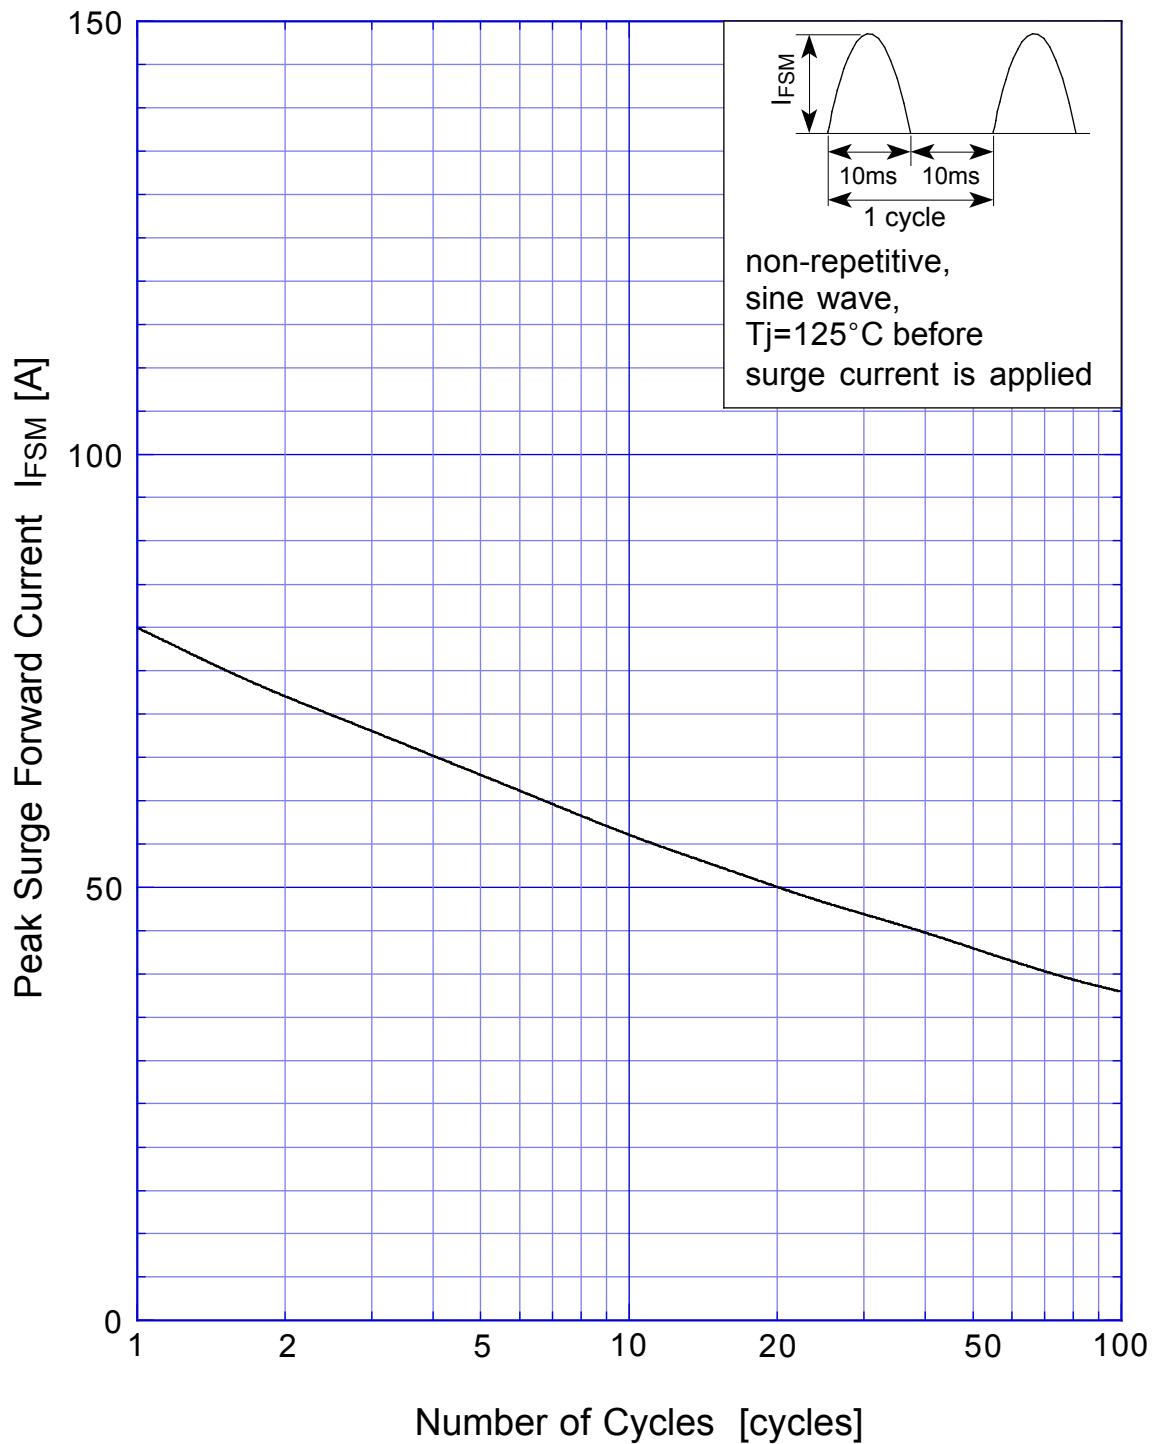

SBD Repetitive Surge Reverse Power Derating Curve

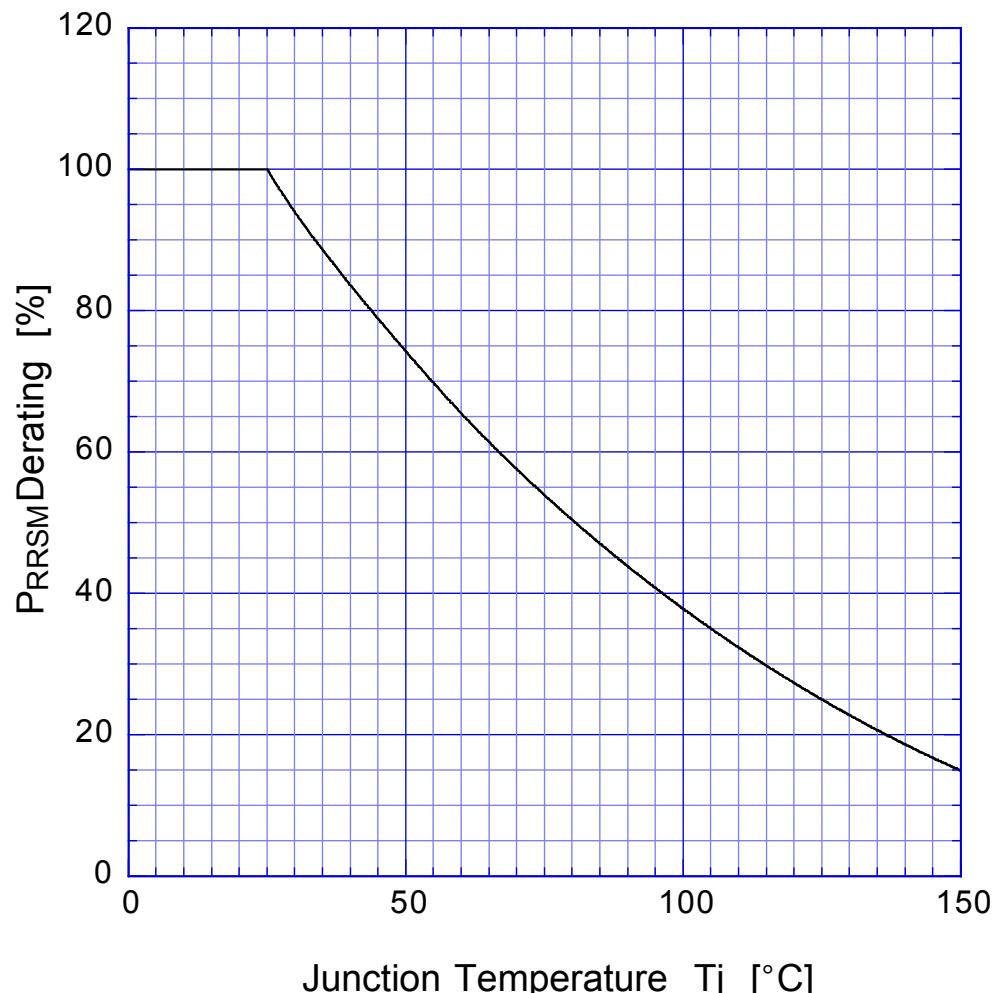

SBD Repetitive Surge Reverse Power Capability

