


### Features

- Fast Switching Speed
- Surface Mount Package Ideally Suited for Automatic Insertion
- High Conductance
- High Reverse Breakdown Voltage Rating

### Mechanical Data

- Case: SOT-23, Molded Plastic
- Plastic Material: UL Flammability Rating Classification Rating 94V-0
- Moisture sensitivity: Level 1 per J-STD-020A
- Terminals: Solderable per MIL-STD-202, Method 208
- Polarity: See Diagram
- Marking: KAE (See Page 2)
- Weight: 0.008 grams (approx.)
- Ordering Information: See below

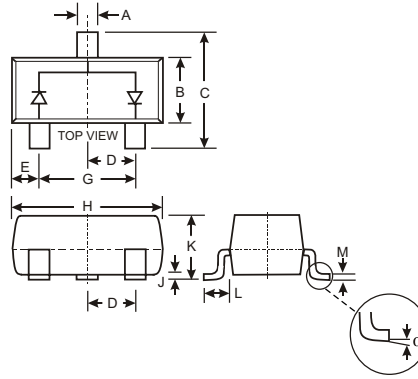

SOT-23		
Dim	Min	Max
A	0.37	0.51
B	1.20	1.40
C	2.30	2.50
D	0.89	1.03
E	0.45	0.60
G	1.78	2.05
H	2.80	3.00
J	0.013	0.10
K	0.903	1.10
L	0.45	0.61
M	0.85	0.80
α	0°	8°
All Dimensions in mm		

### Maximum Ratings @ T<sub>A</sub> = 25°C unless otherwise specified

Characteristic	Symbol	MMBD3004S	Unit
Repetitive Peak Reverse Voltage	V <sub>RRM</sub>	350	V
Working Peak Reverse Voltage DC Blocking Voltage	V <sub>RWM</sub> V <sub>R</sub>	300	V
RMS Reverse Voltage	V <sub>R(RMS)</sub>	212	V
Forward Continuous Current (Note 2)	I <sub>F</sub>	225	mA
Peak Repetitive Forward Current (Note 2)	I <sub>FRM</sub>	625	mA
Non-Repetitive Peak Forward Surge Current @ t = 1.0μs @ t = 1.0s	I <sub>FSM</sub>	4.0 1.0	A
Power Dissipation (Note 2)	P <sub>d</sub>	350	mW
Thermal Resistance Junction to Ambient Air (Note 2)	R <sub>θJA</sub>	357	°C/W
Operating and Storage Temperature Range	T <sub>J</sub> , T <sub>STG</sub>	-65 to +150	°C

### Electrical Characteristics @ T<sub>A</sub> = 25°C unless otherwise specified, per element


Characteristic	Symbol	Min	Typ	Max	Unit	Test Condition
Reverse Breakdown Voltage (Note 1)	V <sub>(BR)R</sub>	350	—	—	V	I <sub>R</sub> = 100μA
Forward Voltage (Note 1)	V <sub>F</sub>	—	0.78 0.93 1.03	0.87 1.0 1.25	V	I <sub>F</sub> = 20mA I <sub>F</sub> = 100mA I <sub>F</sub> = 200mA
Reverse Current (Note 1)	I <sub>R</sub>	—	30 35	100 100	nA μA	V <sub>R</sub> = 240V V <sub>R</sub> = 240V, T <sub>J</sub> = 150°C
Total Capacitance	C <sub>T</sub>	—	1.0	5.0	pF	V <sub>R</sub> = 0V, f = 1.0MHz
Reverse Recovery Time	t <sub>rr</sub>	—	—	50	ns	I <sub>F</sub> = I <sub>R</sub> = 30mA, I <sub>rr</sub> = 3.0mA, R <sub>L</sub> = 100Ω

- Notes:
1. Short duration test pulse used to minimize self-heating effect.
  2. Part mounted on FR-4 board with recommended pad layout, which can be found on our website at <http://www.diodes.com/datasheets/ap02001.pdf>.


### Ordering Information (Note 3)

Device	Packaging	Shipping
MMBD3004S-7	SOT-23	3000/Tape & Reel


- Notes:
3. For Packaging Details, go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.

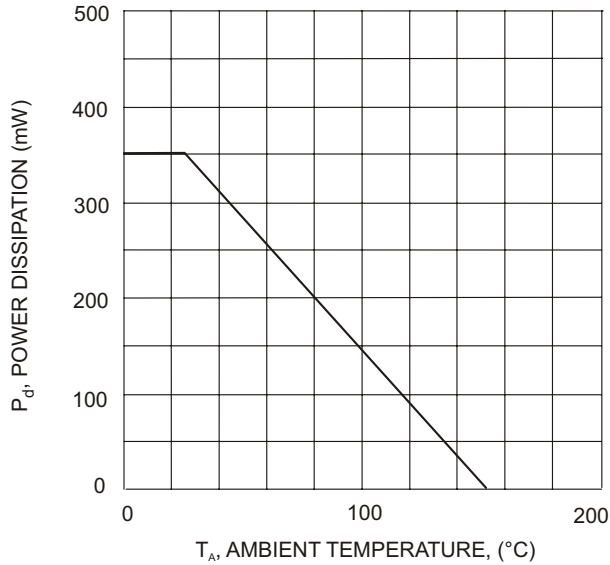


$T_A$ , AMBIENT TEMPERATURE, (°C)  
Fig. 1 Power Derating Curve, total package

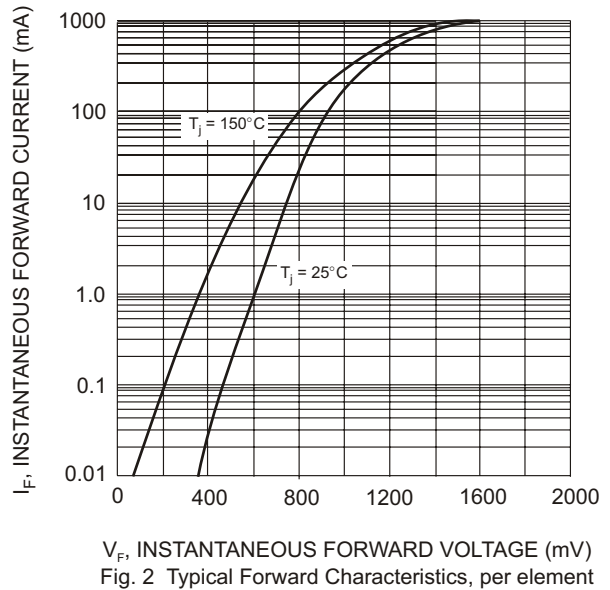

$V_F$ , INSTANTANEOUS FORWARD VOLTAGE (mV)  
Fig. 2 Typical Forward Characteristics, per element

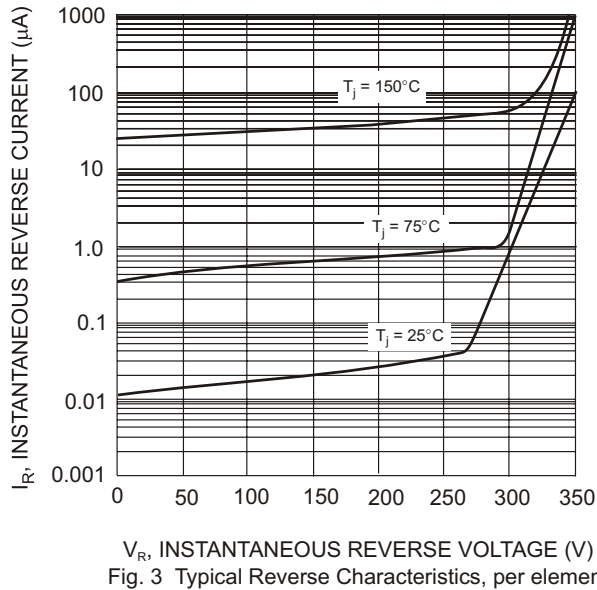


$V_R$ , INSTANTANEOUS REVERSE VOLTAGE (V)  
Fig. 3 Typical Reverse Characteristics, per element

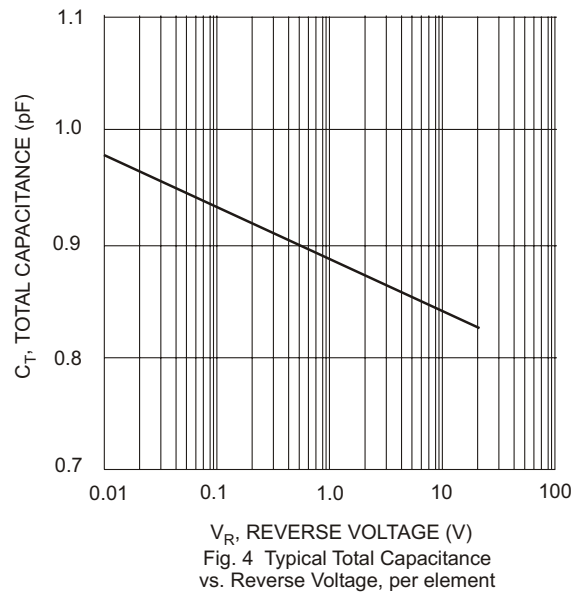

$V_R$ , REVERSE VOLTAGE (V)  
Fig. 4 Typical Total Capacitance vs. Reverse Voltage, per element

## Marking Information



KAE = Product Type Marking Code  
YM = Date Code Marking  
Y = Year ex: N = 2002  
M = Month ex: 9 = September

### Date Code Key

Year	2002	2003	2004	2005	2006	2007
Code	N	P	R	S	T	U

Month	Jan	Feb	March	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Code	1	2	3	4	5	6	7	8	9	O	N	D