


# Dual N-channel enhancement mode TrenchMOS™ transistor

PHN203

## FEATURES

- Dual device
- Low threshold voltage
- Fast switching
- Logic level compatible
- Surface mount package

## SYMBOL

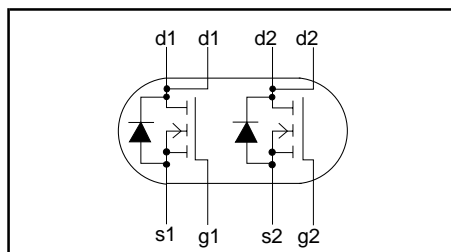

## QUICK REFERENCE DATA

$V_{DS} = 25 \text{ V}$
$I_D = 6.3 \text{ A}$
$R_{DS(ON)} \leq 30 \text{ m}\Omega (V_{GS} = 10 \text{ V})$
$R_{DS(ON)} \leq 55 \text{ m}\Omega (V_{GS} = 4.5 \text{ V})$

## GENERAL DESCRIPTION


N-channel enhancement mode field-effect power transistor in a plastic envelope using 'trench' technology. The device has very low on-state resistance. It is intended for use in dc to dc converters and general purpose switching applications.

The PHN203 is supplied in the SOT96-1 (SO8) surface mounting package.

## PINNING

PIN	DESCRIPTION
1	source 1
2	gate 1
3	source 2
4	gate 2
5,6	drain 2
7,8	drain 1

## SOT96-1

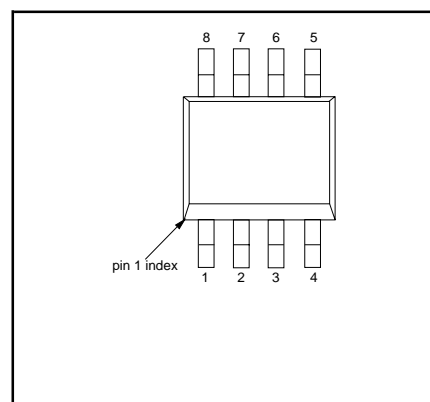

## LIMITING VALUES

Limiting values in accordance with the Absolute Maximum System (IEC 134)

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
$V_{DS}$	Repetitive peak drain-source voltage	$T_j = 25 \text{ }^\circ\text{C to } 150 \text{ }^\circ\text{C}$	-	25	V
$V_{DS}$	Continuous drain-source voltage		-	25	V
$V_{DGR}$	Drain-gate voltage	$R_{GS} = 20 \text{ k}\Omega$	-	25	V
$V_{GS}$	Gate-source voltage		-	$\pm 20$	V
$I_D$	Drain current per MOSFET <sup>1</sup>	$T_a = 25 \text{ }^\circ\text{C}$	-	6.3	A
		$T_a = 70 \text{ }^\circ\text{C}$	-	5	A
$I_D$	Drain current per MOSFET (both MOSFETs conducting) <sup>1</sup>	$T_a = 25 \text{ }^\circ\text{C}$	-	4.4	A
		$T_a = 70 \text{ }^\circ\text{C}$	-	3.5	A
$I_{DM}$	Drain current per MOSFET (pulse peak value)	$T_a = 25 \text{ }^\circ\text{C}$	-	25	A
$P_{tot}$	Total power dissipation (either or both MOSFETs conducting) <sup>1</sup>	$T_a = 25 \text{ }^\circ\text{C}$	-	2	W
		$T_a = 70 \text{ }^\circ\text{C}$	-	1.3	W
$T_{stg}, T_j$	Storage & operating temperature		- 55	150	$^\circ\text{C}$

<sup>1</sup> Surface mounted on FR4 board,  $t \leq 10 \text{ sec}$

## Dual N-channel enhancement mode TrenchMOS™ transistor

PHN203

### THERMAL RESISTANCES

SYMBOL	PARAMETER	CONDITIONS	TYP.	MAX.	UNIT
$R_{th\ j-a}$	Thermal resistance junction to ambient	Surface mounted on FR4 board, $t \leq 10$ sec; either or both MOSFETs conducting	-	62.5	K/W
$R_{th\ j-a}$	Thermal resistance junction to ambient	Surface mounted on FR4 board; either or both MOSFETs conducting	150	-	K/W

### AVALANCHE ENERGY LIMITING VALUES

Limiting values in accordance with the Absolute Maximum System (IEC 134)

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
$E_{AS}$	Non-repetitive avalanche energy (per MOSFET)	Unclamped inductive load, $I_{AS} = 6.3$ A; $t_p = 0.2$ ms; $T_j$ prior to avalanche = $25^\circ\text{C}$ ; $V_{DD} \leq 15$ V; $R_{GS} = 50$ $\Omega$ ; $V_{GS} = 10$ V	-	20	mJ
$I_{AS}$	Non-repetitive avalanche current (per MOSFET)		-	6.3	A

### ELECTRICAL CHARACTERISTICS

 $T_j = 25^\circ\text{C}$ , per MOSFET unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
$V_{(BR)DSS}$	Drain-source breakdown voltage	$V_{GS} = 0$ V; $I_D = 10$ $\mu\text{A}$ ; $T_j = -55^\circ\text{C}$	25 22.5	- -	- -	V V
$V_{GS(TO)}$	Gate threshold voltage	$V_{DS} = V_{GS}$ ; $I_D = 1$ mA $T_j = 150^\circ\text{C}$ $T_j = -55^\circ\text{C}$	1 0.4 -	2 - -	2.8 - 3.2	V V V
$R_{DS(ON)}$	Drain-source on-state resistance	$V_{GS} = 10$ V; $I_D = 4$ A $V_{GS} = 4.5$ V; $I_D = 2$ A $V_{GS} = 10$ V; $I_D = 4$ A; $T_j = 150^\circ\text{C}$	- - -	27 40 43	30 55 51	m $\Omega$ m $\Omega$ m $\Omega$
$g_{fs}$	Forward transconductance	$V_{DS} = 20$ V; $I_D = 4$ A	5	9.7	-	S
$I_{DSS}$	Zero gate voltage drain current	$V_{DS} = 20$ V; $V_{GS} = 0$ V; $V_{DS} = 20$ V; $V_{GS} = 0$ V; $T_j = 150^\circ\text{C}$	- -	60 0.1	100 10	nA $\mu\text{A}$
$I_{GSS}$	Gate source leakage current	$V_{GS} = \pm 20$ V; $V_{DS} = 0$ V	-	10	100	nA
$Q_{g(tot)}$	Total gate charge	$I_D = 4$ A; $V_{DD} = 20$ V; $V_{GS} = 10$ V	-	20	-	nC
$Q_{gs}$	Gate-source charge		-	1.9	-	nC
$Q_{gd}$	Gate-drain (Miller) charge		-	6.1	-	nC
$t_{d\ on}$	Turn-on delay time	$V_{DD} = 20$ V; $R_D = 18$ $\Omega$ ; $V_{GS} = 10$ V; $R_G = 6$ $\Omega$ Resistive load	-	8	-	ns
$t_r$	Turn-on rise time		-	11	-	ns
$t_{d\ off}$	Turn-off delay time		-	31	-	ns
$t_f$	Turn-off fall time		-	17	-	ns
$L_d$	Internal drain inductance	Measured from drain lead to centre of die	-	2.5	-	nH
$L_s$	Internal source inductance	Measured from source lead to source bond pad	-	5	-	nH
$C_{iss}$	Input capacitance	$V_{GS} = 0$ V; $V_{DS} = 20$ V; $f = 1$ MHz	-	611	-	pF
$C_{oss}$	Output capacitance		-	260	-	pF
$C_{rss}$	Feedback capacitance		-	137	-	pF





Dual N-channel enhancement mode  
TrenchMOS™ transistor

PHN203

REVERSE DIODE LIMITING VALUES AND CHARACTERISTICS







T<sub>j</sub> = 25 °C, per MOSFET unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
I <sub>S</sub>	Continuous source diode current (per MOSFET)	T <sub>a</sub> = 25 °C	-	-	2.85	A
I <sub>SM</sub>	Pulsed source diode current (per MOSFET)		-	-	25	A
V <sub>SD</sub>	Diode forward voltage	I <sub>F</sub> = 1.25 A; V <sub>GS</sub> = 0 V	-	0.75	1	V
t <sub>rr</sub>	Reverse recovery time	I <sub>F</sub> = 1.25 A; -di <sub>F</sub> /dt = 100 A/μs;	-	35	-	ns
Q <sub>rr</sub>	Reverse recovery charge	V <sub>GS</sub> = 0 V; V <sub>R</sub> = 25 V	-	24	-	nC

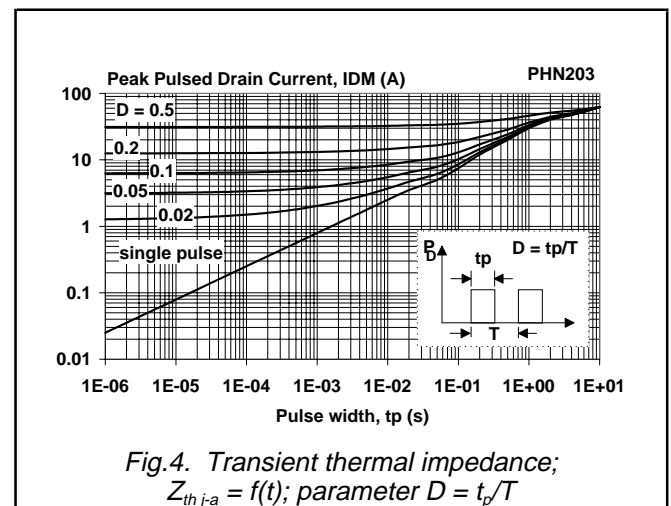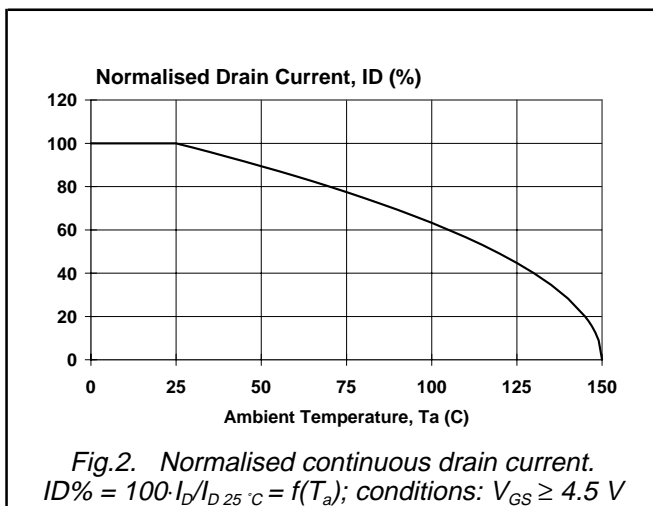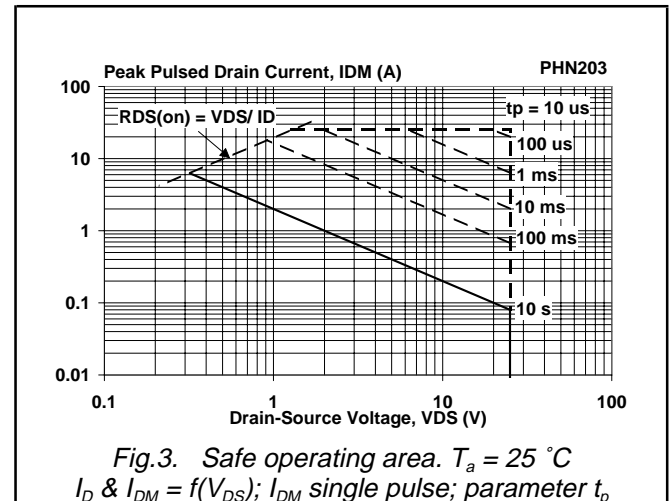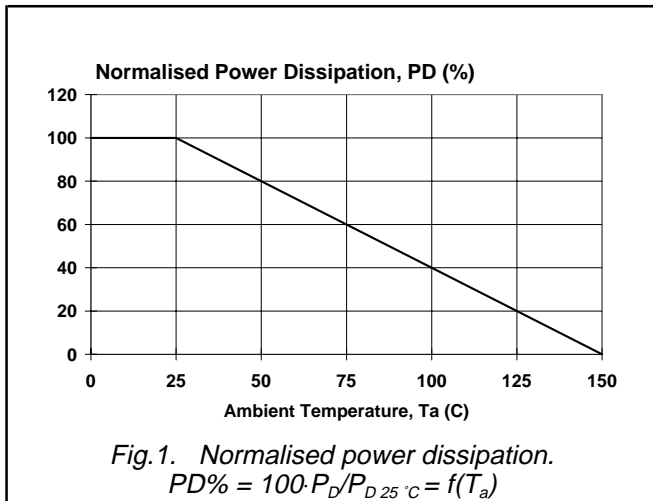






Dual N-channel enhancement mode  
TrenchMOS™ transistor

PHN203

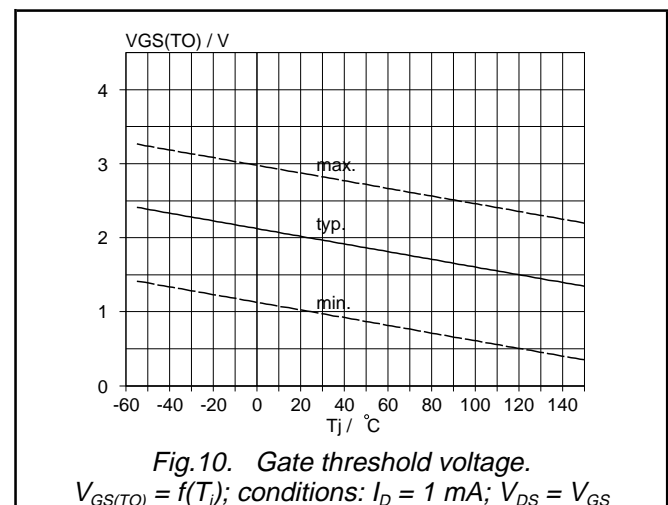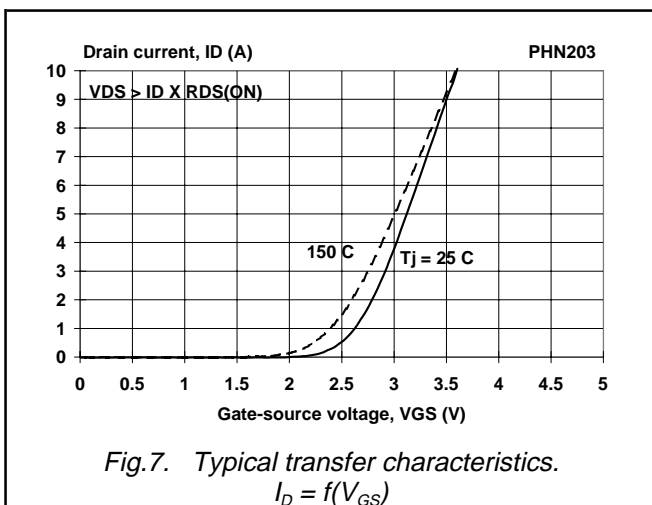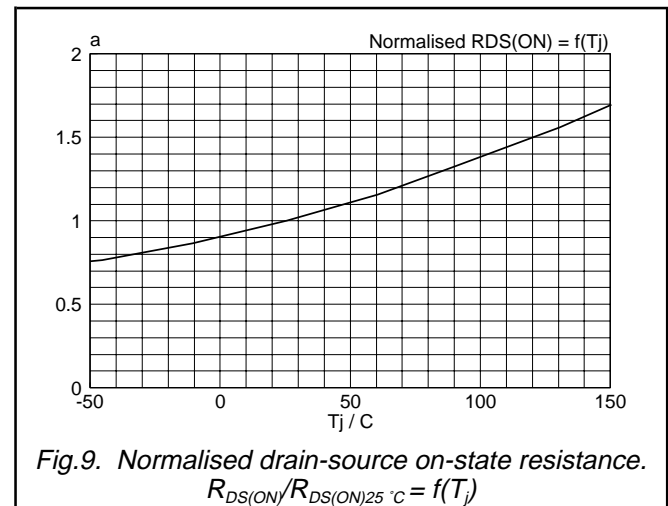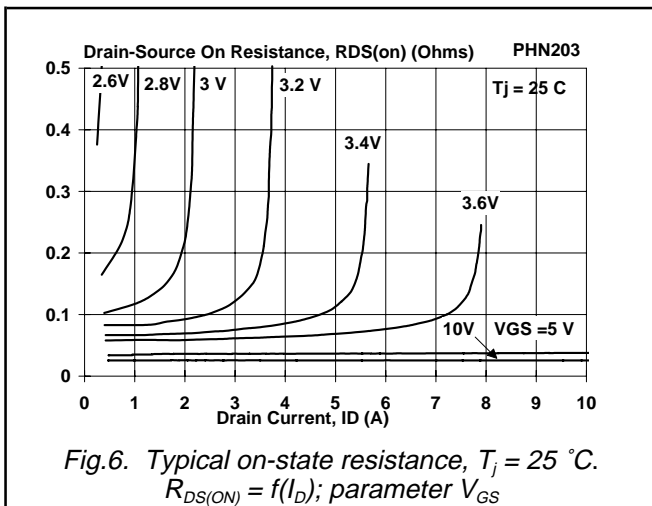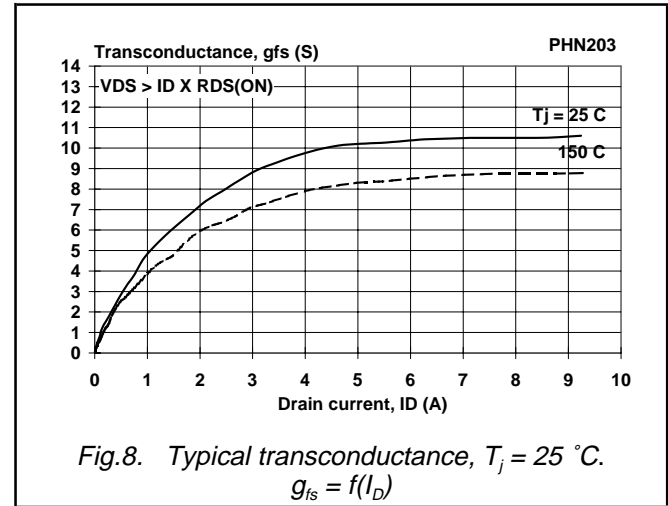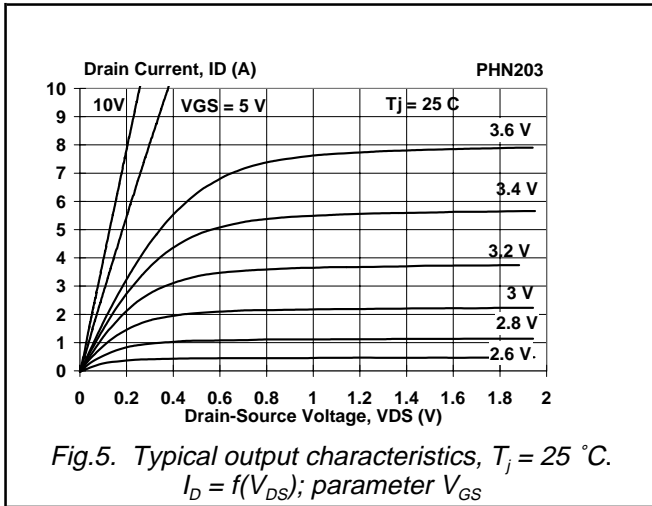

Dual N-channel enhancement mode TrenchMOS™ transistor

PHN203

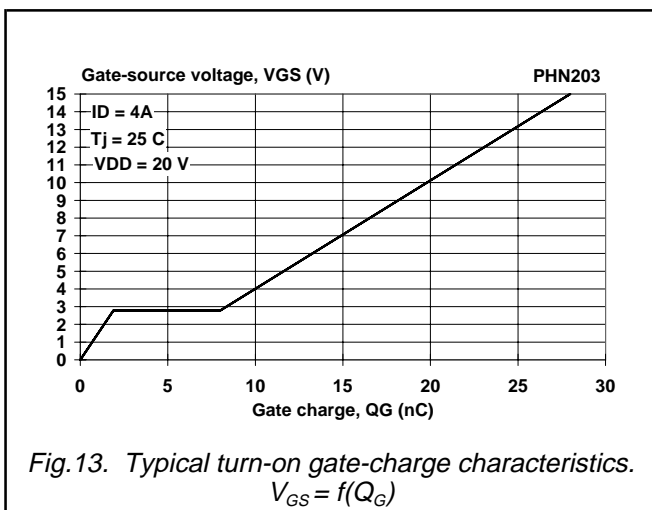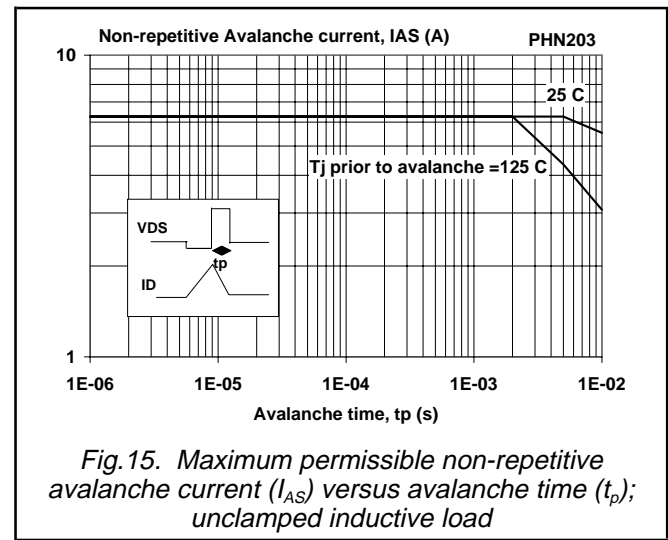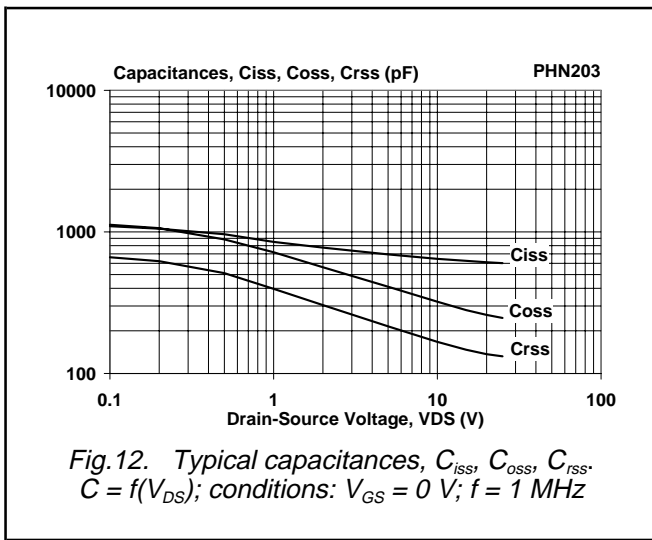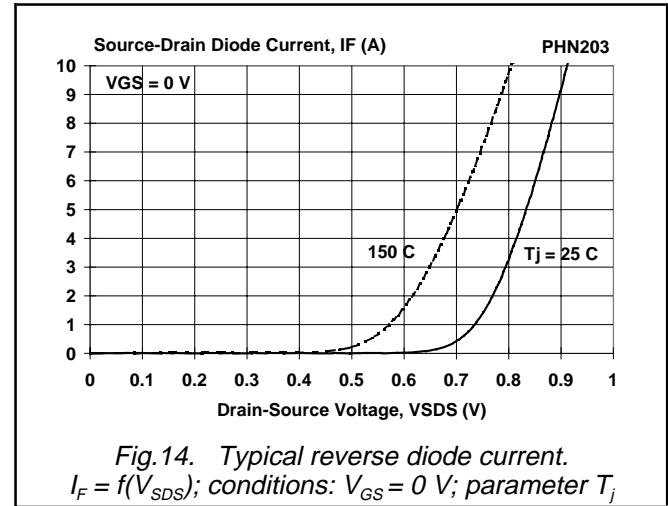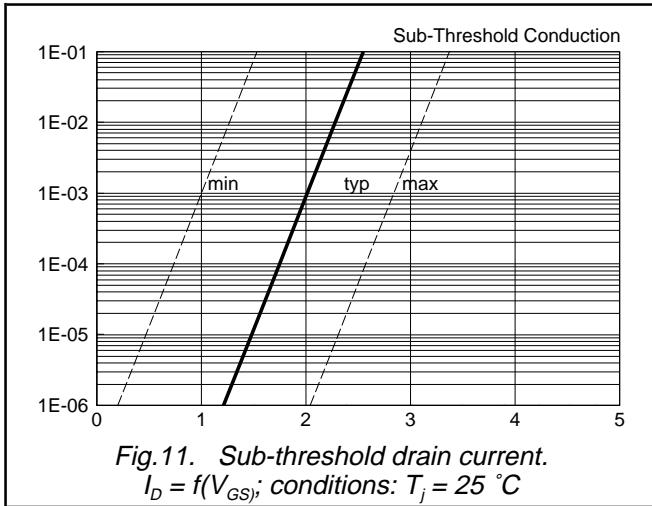

Dual N-channel enhancement mode  
TrenchMOS™ transistor

PHN203

MECHANICAL DATA

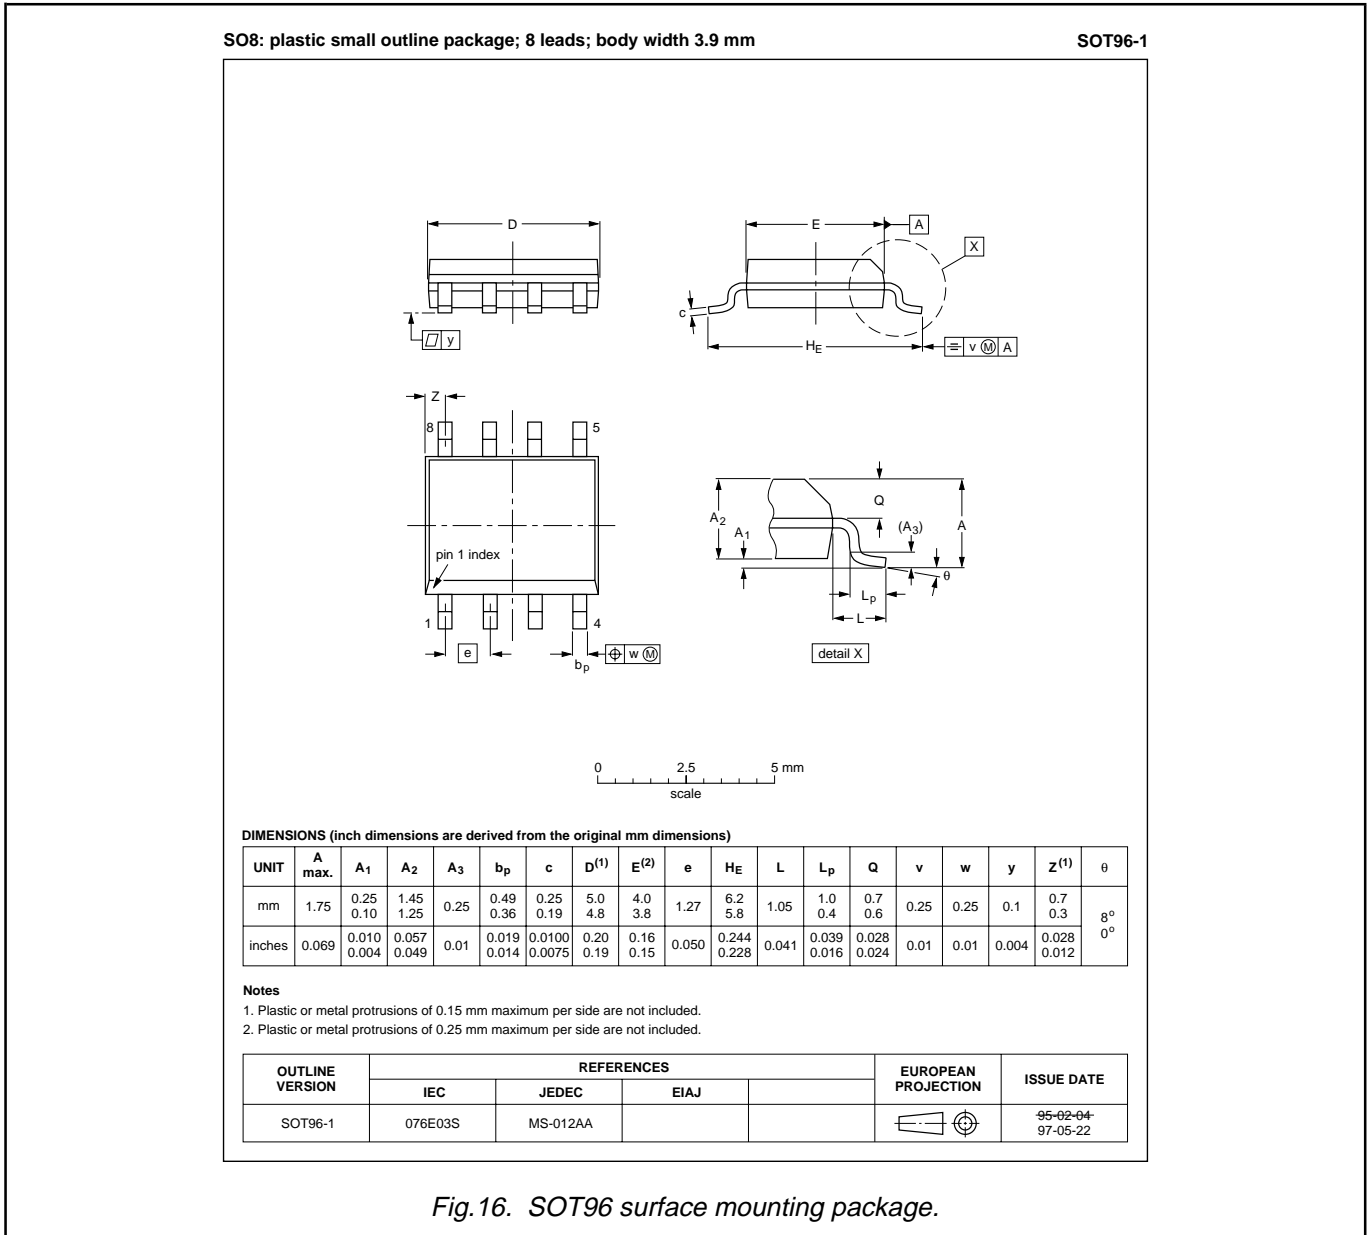


Fig. 16. SOT96 surface mounting package.

Notes

1. This product is supplied in anti-static packaging. The gate-source input must be protected against static discharge during transport or handling.
2. Refer to Integrated Circuit Packages, Data Handbook IC26.
3. Epoxy meets UL94 V0 at 1/8".

## Dual N-channel enhancement mode TrenchMOS™ transistor

PHN203

### DEFINITIONS

<b>Data sheet status</b>	
Objective specification	This data sheet contains target or goal specifications for product development.
Preliminary specification	This data sheet contains preliminary data; supplementary data may be published later.
Product specification	This data sheet contains final product specifications.
<b>Limiting values</b>	
Limiting values are given in accordance with the Absolute Maximum Rating System (IEC 134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of this specification is not implied. Exposure to limiting values for extended periods may affect device reliability.	
<b>Application information</b>	
Where application information is given, it is advisory and does not form part of the specification.	
<b>© Philips Electronics N.V. 1999</b>	
All rights are reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner.	
The information presented in this document does not form part of any quotation or contract, it is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent or other industrial or intellectual property rights.	

### LIFE SUPPORT APPLICATIONS

These products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Philips customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips for any damages resulting from such improper use or sale.