
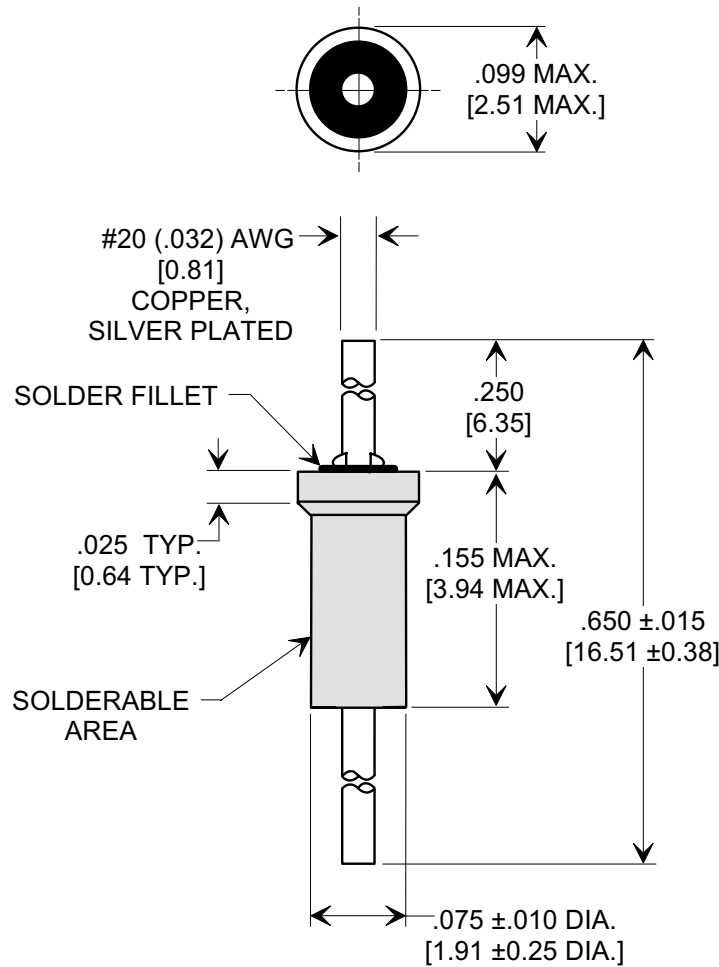



MARKETING SALES DRAWING
DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - []

Electrical Testing
per Tusonix standard
test plans and Mil-Std-202
Test Methods.



SPECIFICATIONS

CAP. VALUE	100 pF
CAP. TOL.	+100, -0%
TEMP. CHAR.	X5R
OPERATING TEMP.	-55° TO +125°C
OPERATING VOLT.	200 WVDC @ +85°C
DIELECTRIC WITHSTANDING	400 VDC, 2 SEC.

NOTES:

- TUSONIX STANDARD PART NUMBER: 2463-002-X5R0-101P.
TUSONIX RoHS COMPLIANT PART
NUMBER: 2463-002-X5R0-101P LF.
CUSTOMER MUST SPECIFY STANDARD OR RoHS PART
NUMBER WHEN ORDERING.
- PART MARKING: STANDARD PART, NO MARKING.
RoHS PART: GREEN LABELING ON PACKAGING.

X-2015 Rev-0

REVISION RECORD	Original Release	ADDED NOTES 1, 2, CIRCUIT & DIELECT. WITH. OPER VOLT WAS 100. ADDED TOL TO DIM .650. S.M. 03-19-05	1
	C.O. 19980305-3-01		

--TOLERANCES-- Unless Otherwise Specified
DECIMAL ± .031 [0.79]
ANGLES ±
TUSONIX TUCSON, ARIZONA

Title SHOULDER FEED-THRU	
Drawn S.M. 03-09-98	Scale NONE
Approved J.Mc. 03-09-98	
A	2463-002-X5R0-101P