


GENERAL PURPOSE APPLICATION.

FEATURES

- Low Saturation Voltage
: $V_{CE(sat)}=1.0V(\text{Max.})$ ($I_C=2A$, $I_B=0.2A$).
- Complementary to KTA1036.

MAXIMUM RATINGS ($T_a=25^\circ\text{C}$)

CHARACTERISTIC		SYMBOL	RATING	UNIT
Collector-Base Voltage		V_{CBO}	60	V
Collector-Emitter Voltage		V_{CEO}	60	V
Emitter-Base Voltage		V_{EB0}	7	V
Collector Current		I_C	3	A
Base Current		I_B	0.5	A
Collector Power Dissipation	$T_a=25^\circ\text{C}$	P_C	2	W
	$T_c=25^\circ\text{C}$		30	
Junction Temperature		T_j	150	$^\circ\text{C}$
Storage Temperature Range		T_{stg}	-55 ~ 150	$^\circ\text{C}$

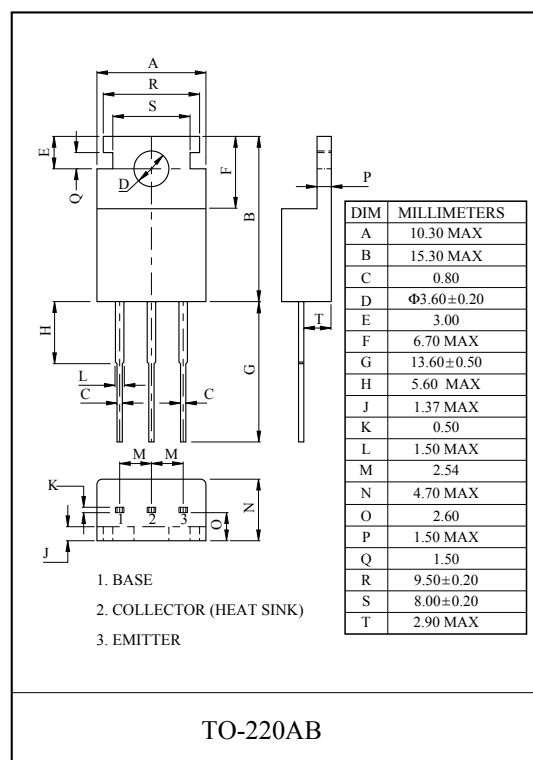

ELECTRICAL CHARACTERISTICS ($T_a=25^\circ\text{C}$)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current		I_{CBO}	$V_{CB}=60V$, $I_E=0$	-	-	100	μA
Emitter Cut-off Current		I_{EBO}	$V_{EB}=7V$, $I_C=0$	-	-	100	μA
Collector-Emitter Breakdown Voltage		$V_{(BR)CEO}$	$I_C=50\text{mA}$, $I_B=0$	60	-	-	V
DC current Gain		h_{FE} (Note)	$V_{CE}=5V$, $I_C=0.5A$	100	-	300	
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$	$I_C=2A$, $I_B=0.2A$	-	0.25	1.0	V
Base-Emitter Voltage		V_{BE}	$V_{CE}=5V$, $I_C=0.5A$	-	0.7	1.0	V
Transition Frequency		f_T	$V_{CE}=5V$, $I_C=0.5A$	-	30	-	MHz
Collector Output Capacitance		C_{ob}	$V_{CB}=10V$, $I_E=0$, $f=1\text{MHz}$	-	35	-	pF
Switching Time	Turn-on Time	t_{on}	$I_{B1}=I_{B2}=0.2A$ DUTY CYCLE $\leq 1\%$	-	0.65	-	μs
	Storage Time	t_{stg}		-	1.3	-	
	Fall Time	t_f		-	0.65	-	

Note : h_{FE} Classification Y:100 ~ 200, GR:150 ~ 300

