

# High Power Broadband Noise Sources

## NMA5112-B1T

### 10 MHz to 2000 MHz



### Specifications

RF Frequency	10 MHz to 2000 MHz
Noise Output	89 to 96 dB ENR
Noise Spectral Density ( $N_o$ )	-83 dBm/Hz Min
Noise Power (N)	10 dBm
Flatness	4 dB P-P Max
VSWR	2.0:1
Peak Factor	5:1
Bias Voltage	15 V
Supply Current	325 mA Max
Impedance	50 ohms

### Package and Connectivity


Construction	Coaxial
Package Type	T Package

### Environmental

Operating Temperature	0 to 70 °C
Storage Temperature	-40 to 95 °C

### Notes

No TTL Control

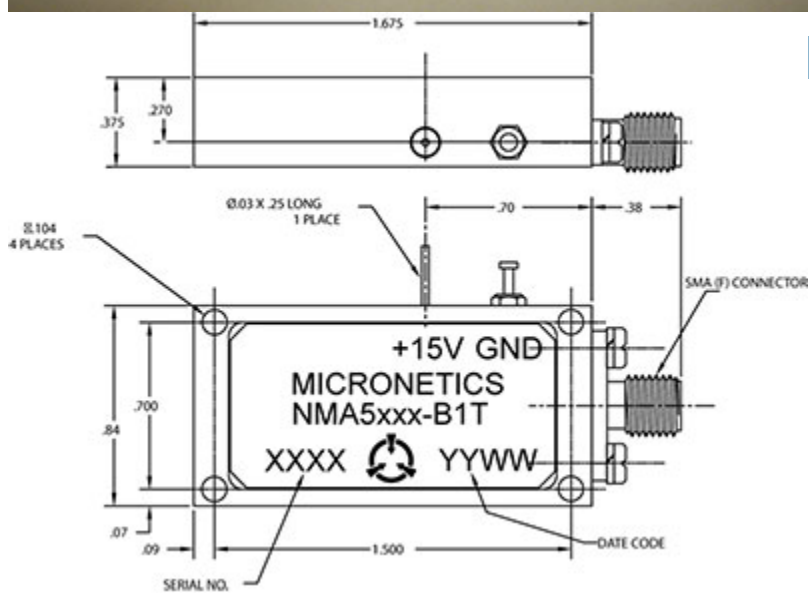

Specifications subject to change without notice

Micronetics, Inc. | Hudson, NH | Tel: 1-603-883-2900 | [www.Micronetics.com](http://www.Micronetics.com)

# MICRONETICS

