


(FEMALE DIP TYPE FOOT PRINT 1.2mm)

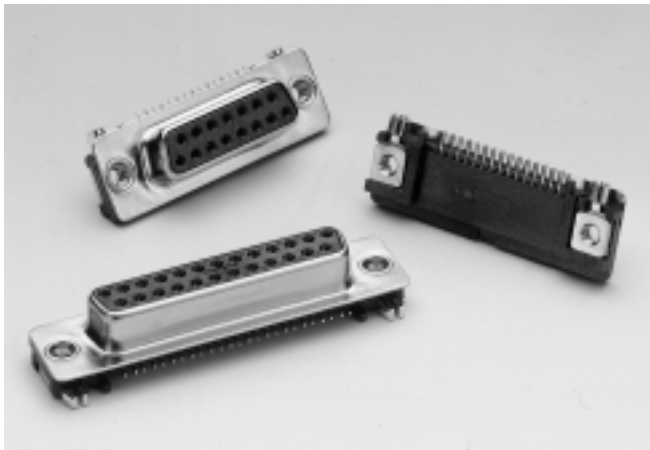


070436FR Series

Mates with SUYIN 070700M, 070900M, 070200M Series

Specifications:

- **09, 15, 25 Circuits**
- **Insulator Material** : High Temp. Plastic
- **Operating Temp. Range** : 230°C for 30 Seconds
- **Terminal Material** : Phosphor Bronze
- **Plating** : Selective Plated (Gold/Tin)
: Metal shell-Nickel Plated
: Soldering clip-Tin Plated
- **Max. Current Rating** : 2.5A
- **Voltage Rating** : 250V AC
- **Dielectric Strength** : 500V (Min. 60 Seconds)

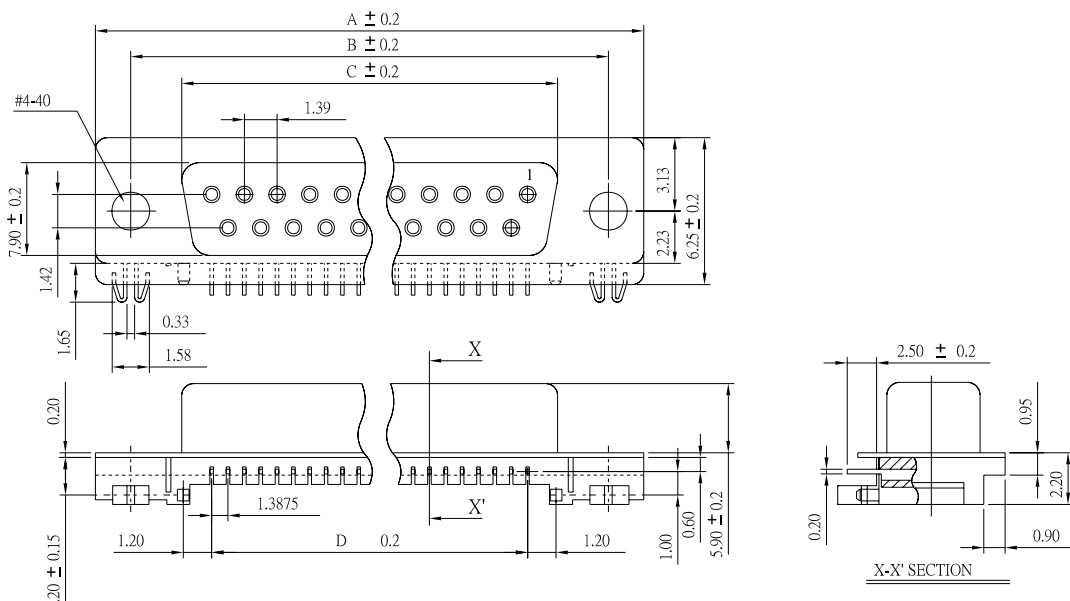


I/O

Order Information

070436FR□□□□00ZU
1 2 3 4 5

1. 'R' : Right Angle Dip Type
 2. No. of Pins
 3. Plating
 4. Color 'Z' : Black
 5. Package
'U' : Tube Package Without Cap
- Reference Page 11

Recommended P.C.B Layout

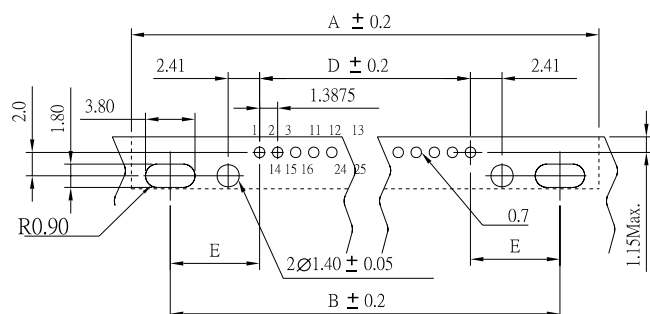

Dimensional Information

SUYIN P/NO.	DIM.A	DIM.B	DIM.C	DIM.D	DIM.E	DIM.F
070436FR009□□□00ZU	30.81	24.99	16.33	11.10	6.945	15.92
070436FR015□□□00ZU	39.14	33.32	24.66	19.425	6.9475	24.425
070436FR025□□□00ZU	53.04	47.04	38.38	33.30	6.87	38.12

* Available for PC 99 system