
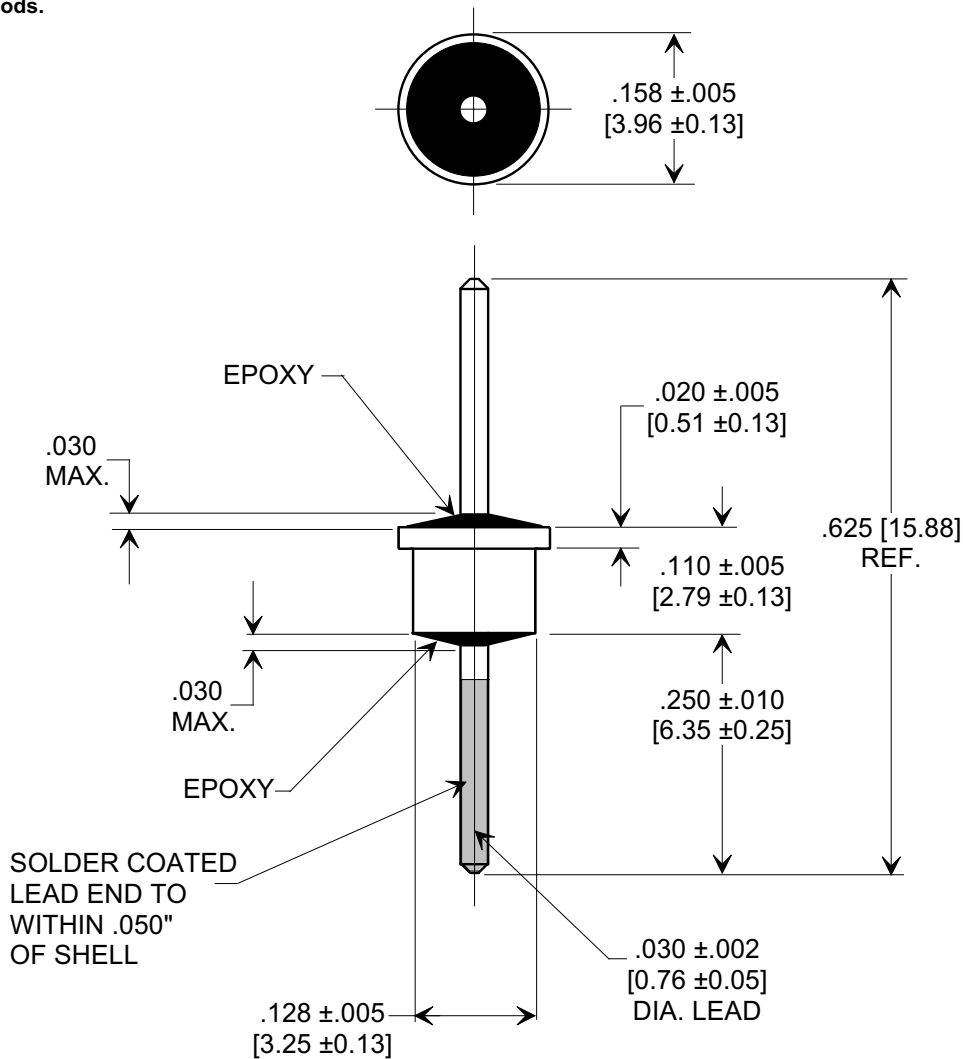



MARKETING SALES DRAWING
 DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
 DIMENSIONS IN METRIC - []

Electrical Testing
 per Tusonix standard
 test plans and Mil-Std-202
 Test Methods.



NOTES:

1. Operating temperature range: -55°C to +125°C.
2. Gold plated case and lead.
3. Epoxy sealed
4. Max. recommended soldering temperature: 260°C.
See installation recommendations.
5. Recommended mounting hole: .135 dia.
6. Solder preform available for mounting.

Cx (pF)	TOL.	DC WORKING VOLTAGE		DC CURRENT (AMPS)	MIN. NO LOAD INSERTION LOSS (dB) @ 25° C PER MIL-STD-220				
		85°C	125°C		1 MHz	10 MHz	100 MHz	1GHz	10 GHz
100	-0 % +100%	300	200	5	---	---	3	20	28

REVISION RECORD Original Release C.O. 20000606-2-04 0		--TOLERANCES-- Unless Otherwise Specified	Title			
		DECIMAL ±	SOLDER MOUNT EMI FILTER			
		ANGLES ±	Drawn	L.E. 06-07-00	Scale	5 X
		TUSONIX TUCSON, ARIZONA	Approved		T.C. 06-07-00	
		A	4301-001			

X-2015 Rev-0