

isc Silicon NPN Power Transistor

2SC790

DESCRIPTION



- Low Collector Saturation Voltage-
: $V_{CE(sat)} = 1.4(V)(Max) @ I_C = 2A$
- DC Current Gain-
: $h_{FE} = 40-240 @ I_C = 0.5A$
- Complement to Type 2SA490

APPLICATIONS

- Designed for power amplifier applications.

ABSOLUTE MAXIMUM RATINGS($T_a=25^{\circ}C$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-Base Voltage	50	V
V_{CEO}	Collector-Emitter Voltage	40	V
V_{EBO}	Emitter-Base Voltage	5	V
I_C	Collector Current-Continuous	3	A
I_E	Emitter Current-Continuous	-3	A
P_C	Total Power Dissipation @ $T_C=25^{\circ}C$	25	W
T_J	Junction Temperature	150	$^{\circ}C$
T_{stg}	Storage Temperature Range	-55~150	$^{\circ}C$

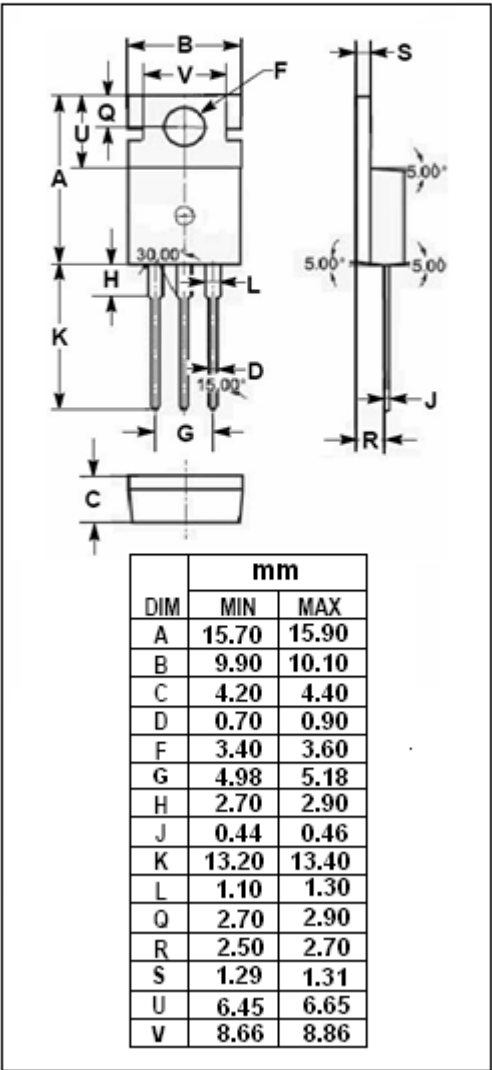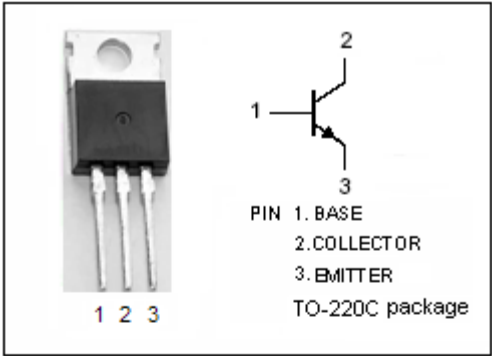

ISC Silicon NPN Power Transistor**2SC790****ELECTRICAL CHARACTERISTICS** $T_C=25^{\circ}\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage	$I_C=50\text{mA}; I_B=0$	40			V
$V_{(BR)EBO}$	Emitter-Base Breakdown Voltage	$I_E=10\text{mA}; I_C=0$	5			V
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C=2\text{A}; I_B=0.2\text{A}$			1.4	V
$V_{BE(on)}$	Base-Emitter On Voltage	$I_C=2\text{A}; V_{CE}=2\text{V}$			1.8	V
I_{CBO}	Collector Cutoff Current	$V_{CB}=30\text{V}; I_E=0$			10	μA
I_{EBO}	Emitter Cutoff Current	$V_{EB}=5\text{V}; I_C=0$			100	μA
h_{FE-1}	DC Current Gain	$I_C=0.5\text{A}; V_{CE}=2\text{V}$	40		240	
h_{FE-2}	DC Current Gain	$I_C=2\text{A}; V_{CE}=2\text{V}$	13			
f_T	Current-Gain—Bandwidth Product	$I_C=0.5\text{A}; V_{CE}=2\text{V}$	3			MHz
C_{OB}	Collector Output Capacitance	$I_E=0; V_{CB}=10\text{V}; f=1\text{MHz}$		70		pF

◆ **h_{FE-1} Classifications**

R	O	Y
40-80	70-140	120-240