




MATERIAL AND FINISH

Insulator: Polycarbonate, UL-94V-0 rated
Contacts: Brass, Tin Plated



ELECTRICAL SPECIFICATIONS:

Current rating: 10 A 

Current rating: 15 A 
Voltage rating: 250 VAC 

Insulation resistance: 100 Mohm min. at 500 VDC

Dielectric withstanding voltage: 2000 VAC for one minute

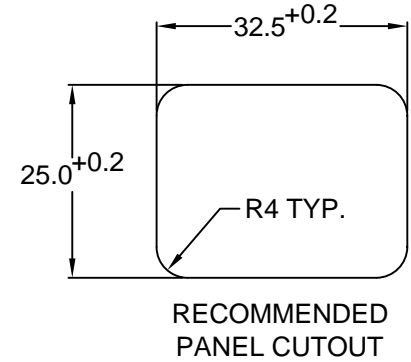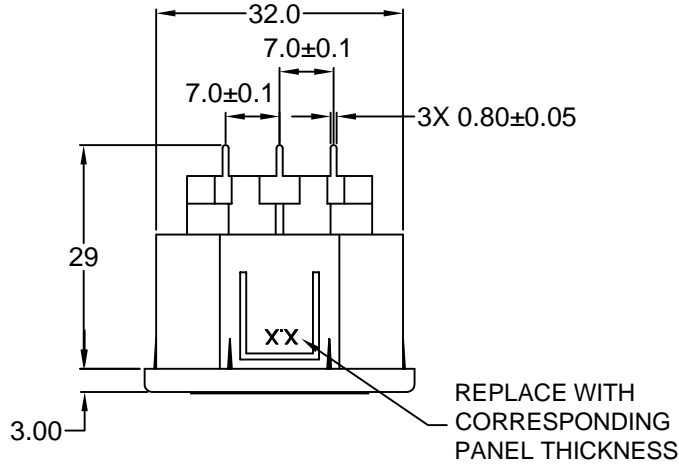




REPLACE WITH CORRESPONDING PANEL THICKNESS

RoHS COMPLIANT

ORDERING CODE:
43R09-3 3 2- 1 2

- 1) COLOR
1 = BLACK
2 = GRAY

- 2) PANEL THICKNESS

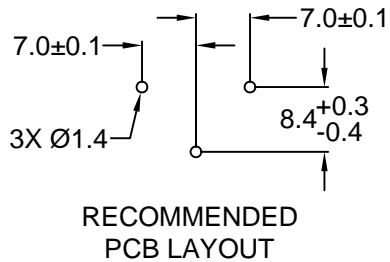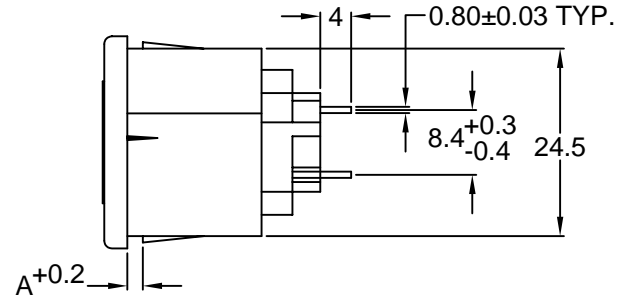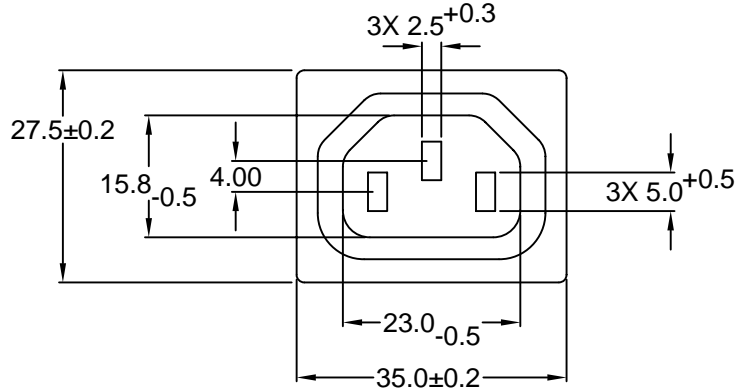

P/N	A	MAX. PANEL THICKNESS
42R09-3X32-150	1.5	1.5
43R09-3X32-200	2.0	2.0
43R09-3X32-250	2.5	2.5

ADDITIONAL PANEL THICKNESS AVAILABLE ON REQUEST

TOLERANCE UNLESS OTHERWISE SPECIFIED	
X	± 1
X.X	± 0.4
X.XX	± 0.20

Power Dynamics, Inc.
Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: 10A/15A IEC 60320 APPL. OUTLET; STRAIGHT PC TERMINALS; SNAP-IN, PANEL MOUNT

DRAWN BY	GQ	DATE:	10/09/01
CHECK BY	TD	DATE:	10/11/01
APPR BY	PB	DATE:	10/11/01

PART #: 43R09-3X32-XXX		SHEET 1 of 1
SIZE: A	ALL DIMENSIONS FOR REFERENCE ONLY	
SCALE: NTS	DIMENSIONS ARE IN MILLIMETERS	

REVISIONS	CHANGE	CHNG	CHK	APPR
	REV	DATE		