

Outgassing Compliant Power Inductors AE558PTA



- High temperature materials allow operation in ambient temperatures up to 155°C.
- Passes NASA low outgassing specifications
- Tin-lead (Sn-Pb) termination for the best possible board adhesion
- Excellent current handling; very low DCR

Core material Ferrite

Terminations Tin-lead over tin over nickel over phos bronze

Weight 1.6 g

Ambient temperature -55°C to +105°C with Irms current, +105°C to +155°C with derated current

Storage temperature Component: -55°C to +155°C.
Tape and reel packaging: -55°C to +80°C

Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)

Enhanced crush-resistant packaging 200/7" reel
Plastic tape: 24 mm wide, 0.4 mm thick, 16 mm pocket spacing, 5.45 mm pocket depth

Part number ¹	Inductance ² ±20% (µH)	DCR max ³ (mOhm)	SRF (MHz) ⁴		Isat (A) ⁵			Irms (A) ⁶	
			min	typ	10% drop	20% drop	30% drop	20°C rise	40°C rise
AE558PTA331MSZ	0.33	4.0	119	170	29.5	30.0	30.5	12.5	16.3
AE558PTA801MSZ	0.80	4.0	70.0	100	24.9	25.2	25.6	12.5	16.3
AE558PTA102MSZ	1.0	4.0	66.5	95.0	16.5	17.0	17.5	12.5	16.3
AE558PTA122MSZ	1.2	6.0	63.7	91.0	20.5	21.0	21.3	11.0	15.0
AE558PTA132MSZ	1.3	4.0	56.7	81.0	12.9	16.8	17.2	12.5	16.3
AE558PTA152MSZ	1.5	6.0	52.5	75.0	13.5	14.0	14.5	11.0	15.0
AE558PTA182MSZ	1.8	6.0	49.0	70.0	13.3	13.8	14.3	11.0	15.0
AE558PTA202MSZ	2.0	9.0	45.5	65.0	15.3	15.8	16.2	8.5	11.5
AE558PTA222MSZ	2.2	4.0	40.6	58.0	8.9	9.6	10.0	12.5	16.3
AE558PTA252MSZ	2.5	7.5	38.5	55.0	11.4	11.8	12.1	9.0	12.0
AE558PTA322MSZ	3.2	6.0	37.1	53.0	7.3	7.8	8.5	11.0	15.0
AE558PTA402MSZ	4.0	9.0	32.9	47.0	8.3	8.5	8.8	8.5	11.5
AE558PTA432MSZ	4.3	7.5	30.8	44.0	6.4	6.8	7.0	9.0	12.0
AE558PTA572MSZ	5.7	9.0	24.5	35.0	5.4	5.8	6.0	8.5	11.5

1. When ordering, please specify **testing** code:

AE558PTA103MSZ

Testing: Z = COTS

H = Screening per Coilcraft CP-SA-10001

N = Screening per Coilcraft CP-SA-10004

2. Inductance measured at 100 kHz, 0.1 Vrms, 0 Adc on an Agilent/HP 4284A or equivalent.

3. DCR measured on a micro-ohmmeter.

4. SRF measured using an Agilent/HP 8753D network analyzer.

5. Typical DC current at which the inductance drops the specified amount from its value without current.

6. Typical current that causes the specified temperature rise from 25°C ambient.

7. Electrical specifications at 25°C.

Refer to Doc 362 "Soldering Surface Mount Components" before soldering.



CRITICAL PRODUCTS & SERVICES

© Coilcraft, Inc. 2012

1102 Silver Lake Road
Cary, IL 60013
Phone 800-981-0363


Fax 847-639-1508
Email cps@coilcraft.com
www.coilcraft-cps.com

Document AE535-1 Revised 12/05/12


This product may not be used in medical or high risk applications without prior Coilcraft approval. Specifications subject to change without notice. Please check our web site for latest information.

AE558PTA Series





Typical L vs Frequency

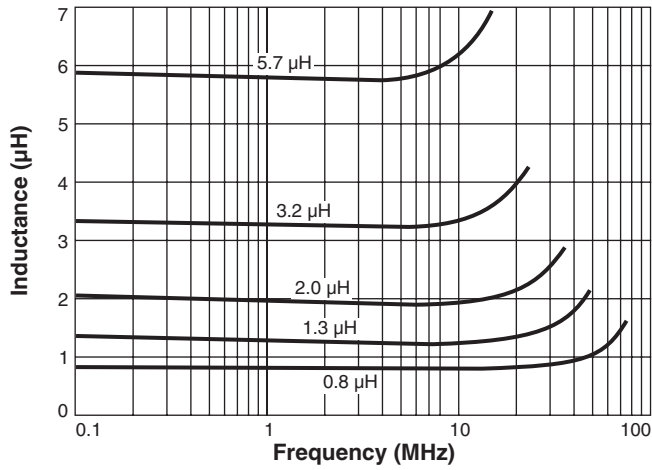

Typical L vs Current

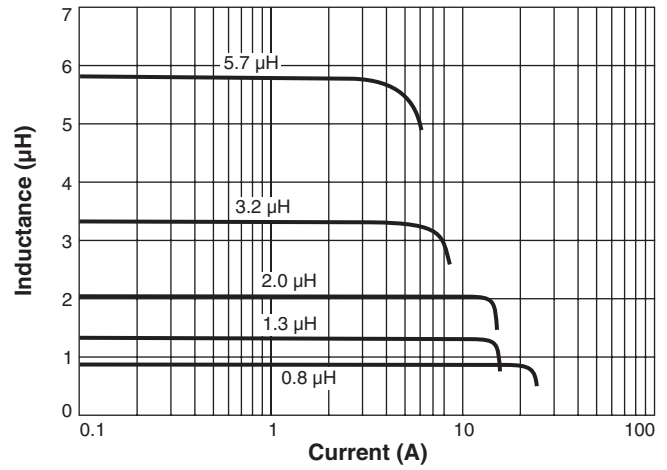

Irms Derating

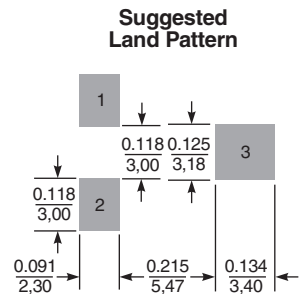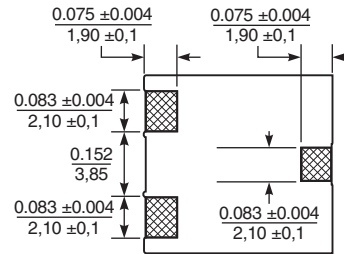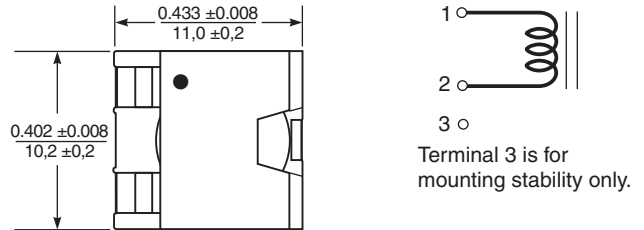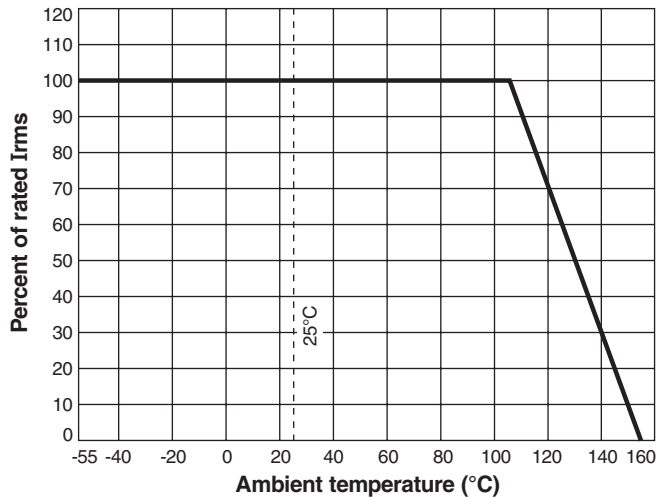

Dimensions are in $\frac{\text{inches}}{\text{mm}}$