

# Chip Inductors for Critical Applications ST413RAD

- Highest Q factors for this body size, roughly 20% higher than our xx413RAA parts.
- Exceptional SRFs, tight tolerance and batch consistency

Part number <sup>1</sup>	Inductance <sup>3</sup> (nH)	Percent tolerance	Q min <sup>4</sup>	SRF min <sup>5</sup> (GHz)	DCR max <sup>6</sup> (Ohm)	I <sub>max</sub> (A)
ST413RAD3N0_LZ <sup>2</sup>	3.0 @ 50 MHz	5	57 @ 1000 MHz	>5.00	38	1.8
ST413RAD4N1_LZ	4.1 @ 50 MHz	5	75 @ 1000 MHz	>5.00	50	1.8
ST413RAD7N8_LZ <sup>2</sup>	7.8 @ 50 MHz	5	51 @ 500 MHz	3.80	50	1.6
ST413RAD10N_LZ	10 @ 50 MHz	5,2	60 @ 500 MHz	3.20	60	1.5
ST413RAD12N_LZ	12 @ 50 MHz	5,2	57 @ 500 MHz	2.40	60	1.5
ST413RAD18N_LZ	18 @ 50 MHz	5,2	62 @ 350 MHz	2.10	70	1.4
ST413RAD22N_LZ	22 @ 50 MHz	5,2	62 @ 350 MHz	2.05	70	1.4
ST413RAD33N_LZ	33 @ 50 MHz	5,2	49 @ 150 MHz	1.70	90	1.2
ST413RAD36N_LZ	36 @ 50 MHz	5,2	57 @ 150 MHz	1.40	90	1.1
ST413RAD39N_LZ	39 @ 50 MHz	5,2	45 @ 150 MHz	1.30	90	1.1
ST413RAD47N_LZ	47 @ 50 MHz	5,2,1	45 @ 150 MHz	1.45	120	0.95
ST413RAD56N_LZ	56 @ 50 MHz	5,2,1	43 @ 150 MHz	1.08	120	0.95
ST413RAD68N_LZ	68 @ 50 MHz	5,2,1	54 @ 150 MHz	1.15	130	0.85
ST413RAD82N_LZ	82 @ 50 MHz	5,2,1	54 @ 150 MHz	1.06	160	0.80
ST413RADR10_LZ	100 @ 50 MHz	5,2,1	51 @ 150 MHz	0.82	160	0.80

1. When ordering, specify **tolerance, termination** and **testing** codes:

ST413RADR10GLZ

**Tolerance:** F 1% G = 2% J = 5%

**Termination:** L = RoHS compliant silver-palladium-platinum glass frit.

**Special order:**

S = Tin-lead (63/37) over silver-platinum-glass frit.

T = Tin-silver-copper (95.5/4/0.5) over silver-platinum-glass frit.

**Testing:** Z = COTS

H = Screening per Coilcraft CP-SA-10001

- Part is wound on low profile coilform.
- Inductance measured using a Coilcraft SMD-A fixture in an Agilent/HP 4286A impedance analyzer or equivalent with Coilcraft-provided correlation pieces.
- Q measured using an Agilent/HP 4291A with an Agilent/HP 16197A test fixture or equivalents.
- SRF measured using an Agilent/HP 8753ES network analyzer or equivalent and a Coilcraft SMD-D test fixture.
- DCR measured on a Keithley 580 micro-ohmmeter or equivalent and a Coilcraft CCF858 test fixture.
- Electrical specifications at 25°C.

Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

**Core material** Ceramic

**Terminations** Silver-palladium-platinum-glass frit.

**Ambient temperature** -40°C to +125°C with I<sub>max</sub> current, +125°C to +140°C with derated current

**Storage temperature** Component: -55°C to +140°C.  
Tape and reel packaging: -55°C to +80°C

**Resistance to soldering heat** Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

**Temperature Coefficient of Inductance (TCL)** +25 to +155 ppm/°C

**Moisture Sensitivity Level (MSL)** 1 (unlimited floor life at <30°C / 85% relative humidity)

**Packaging** 2000/7" reel

Standard height parts: Plastic tape: 8 mm wide, 0.23 mm thick, 4 mm pocket spacing, 1.8 mm pocket depth

Low profile parts: Plastic tape: 8 mm wide, 0.3 mm thick, 4 mm pocket spacing, 1.6 mm pocket depth



© Coilcraft, Inc. 2012

1102 Silver Lake Road  
Cary, IL 60013  
Phone 800-981-0363

Fax 847-639-1508  
Email cps@coilcraft.com  
www.coilcraft-cps.com


**COILCRAFT** ACCURATE  
**PRECISION** REPEATABLE  
MEASUREMENTS  
SEE WEB SITE **TEST FIXTURES**

Document ST190-1 Revised 11/06/12


This product may not be used in medical or high risk applications without prior Coilcraft approval. Specifications subject to change without notice. Please check our web site for latest information.

# ST413RAD Series (1008)



## Typical Q vs Frequency

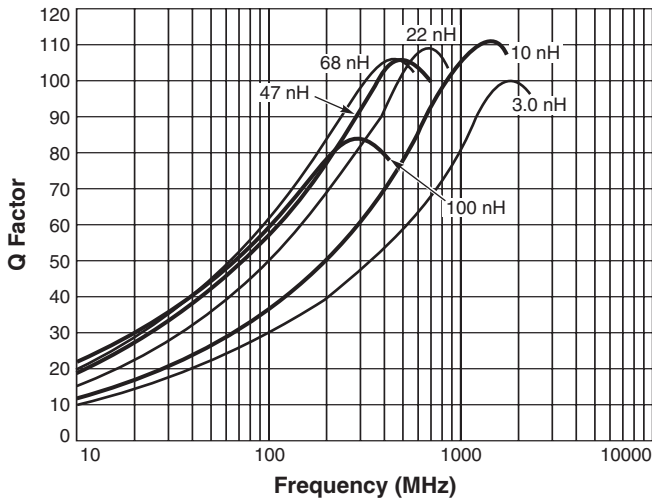

## Typical L vs Frequency

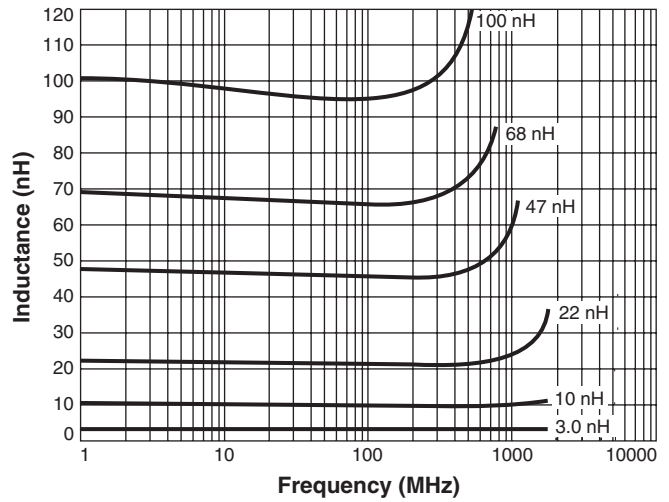

## Current Derating

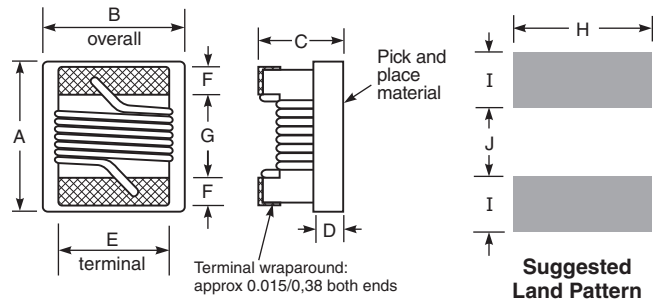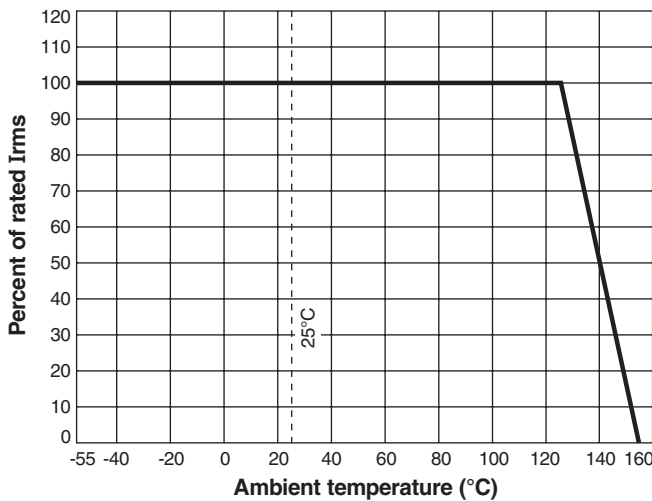

A	B	C	D	E	F	G	H	I	J
max	max	max*	ref						
0.115	0.110	0.080	0.020	0.080	0.020	0.060	0.100	0.040	0.050
2,92	2,79	2,03	0,51	2,03	0,51	1,52	2,54	1,02	1,27

\*Low profile parts: 0.050/1,27

Note: Dimensions are before optional solder application. For maximum overall dimensions including solder, add 0.0025 in / 0,064 mm to B and 0.006 in / 0,15 mm to A and C.



1102 Silver Lake Road  
Cary, IL 60013  
Phone 800-981-0363

Fax 847-639-1508  
Email cps@coilcraft.com  
www.coilcraft-cps.com

Document ST190-2 Revised 11/06/12

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specifications subject to change without notice. Please check our web site for latest information.