

10BASE-T/ETHERNET ISOLATION TRANSFORMER

Turns Ratio (±5%)	1:1
---------------------	-----

TRIPLE STYLE
(3 Transformers per Package)

PARAMETER	MIN.	MAX.	UNITS
Open Circuit Inductance	60	90	μHy
Leakage Inductance		0.25	μHy
Interwinding Capacitance (C _{w/w})		10	pF
Rise Time		3.0	ns
ET	2.3		VμS
Primary DC Resistance		0.25	ohms
Secondary DC Resistance		0.25	ohms
High Potential Test	2000		V _{RMS}

IEEE 802.3 (10 BASE 2, 10 BASE 5)
& ECMA Compatible

Flammability: Materials used in the production of these units meet requirements of UL94-VO and IEC 695-2-2 needle flame test.

Parts shipped in anti-static tubes. 34 pieces per tube


SMD versions available on Tape & Reel

Test Conditions:
Oscillation Voltage = 20mV
Oscillation Frequency = 100.0 KHz


Storage Temperature: -50°C to +130°C

PHYSICAL DIMENSIONS

All dimensions in inches (mm):

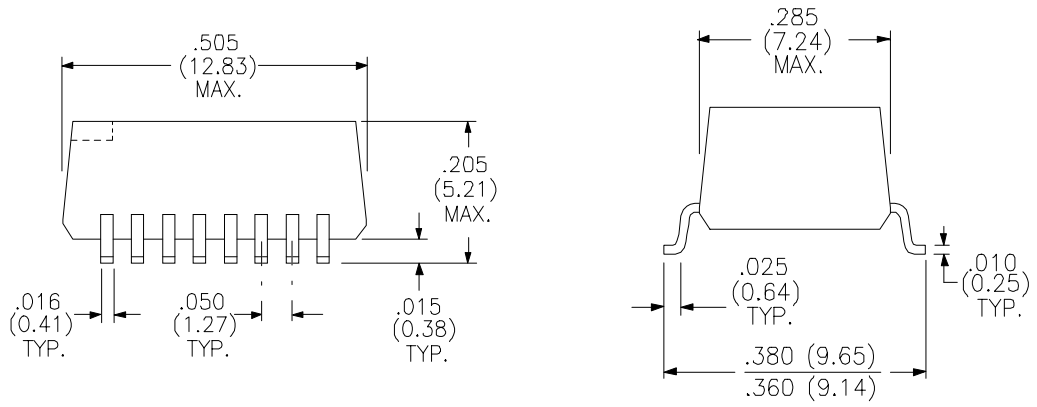

SCHEMATIC DIAGRAM:

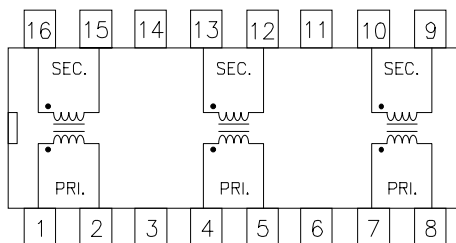

RHOMBUS P/N: T-14001	
CUST P/N:	NAME:
DATE: 11/19/99	SHEET: 1 OF 1