

2SC 3198  
2SC 3198 (L)

# SILICON NPN TRANSISTOR EPITAXIAL PLANAR TYPE (PCT PROCESS)


Unit in mm

## APPLICATIONS

- Low Frequency Amplifiers
- Low Noise Amplifiers

## FEATURES

- Excellent  $h_{FE}$  Linearity,  $h_{FE}(0.1mA)/h_{FE}(2mA) = 0.95$  (Typ.)
- High  $h_{FE}$  (70~700).
- Excellent Safe Operation Area.
- Low Noise 2SC3198 NF=1dB (TYP), 10dB (Max).  
2SC3198(L) NF=0.2dB (TYP), 3dB (Max).
- Complementary to the 2SA1266/2SA1266(L).

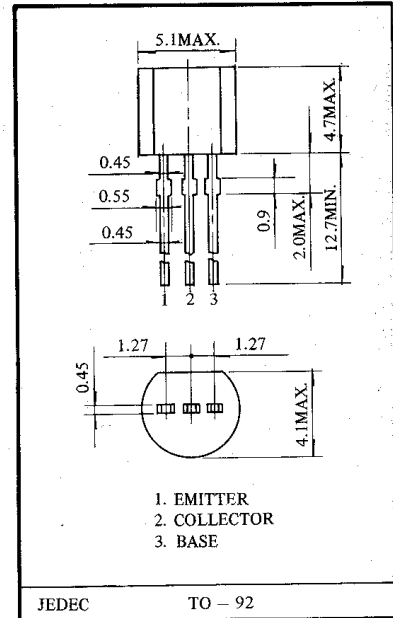

## MAXIMUM RATINGS (Ta=25°C)

CHARACTERISTIC	SYMBOL	RATING	UNIT	CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector - Base Voltage	$V_{CBO}$	60	V	Emitter Current	$I_E$	-150	mA
Collector - Emitter Voltage	$V_{CEO}$	50	V	Collector Power Dissipation	$P_C$	400	mW
Emitter - Base Voltage	$V_{EBO}$	5	V	Junction Temperature	$T_j$	125	°C
Collector Current	$I_C$	150	mA	Storage Temperature Range	$T_{stg}$	-55~125	°C

## ELECTRICAL CHARACTERISTICS (Ta=25°C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut off Current	$I_{CBO}$	$V_{CB}=60V, I_E=0$	-	-	0.1	$\mu A$
Emitter Cut off Current	$I_{EBO}$	$V_{EB}=5V, I_C=0$	-	-	0.1	$\mu A$
DC Current Gain (1)	$h_{FE(1)}$	$V_{CE}=6V, I_C=2mA$	70	-	700	-
DC Current Gain (2)	$h_{FE(2)}$	$V_{CE}=6V, I_C=150mA$	25	-	-	-
Collector - Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=100mA, I_B=10mA$	-	0.1	0.25	V
Base - Emitter Saturation Voltage	$V_{BE(sat)}$	$I_C=100mA, I_B=100mA$	-	-	0.1	V
Transition Frequency	$f_T$	$V_{CE}=10V, I_E=-1mA$	80	-	-	MHz
Output Capacitance	$C_{ob}$	$V_{CB}=10V, I_E=0, f=1MHz$	-	2.0	3.0	pF
Base Spreading Resistance	$r_{bb'}$	$V_{CB}=10V, I_E=-1mA, f=30MHz$	-	50	-	$\Omega$
Noise Figure	2SC3198	$V_{CE}=-6V, I_C=0.1mA$	-	1	10	dB
	2SC3198(L)	$R_g=10k\Omega, f=1KHz$	-	0.2	3	

■ NOTE: According to  $h_{FE}$  (1), Classified as follows

O	70-140	Y	120~240	GR	200~400	BL	350~700
---	--------	---	---------	----	---------	----	---------