


- 4 Transmit, 4 Receive Quad Port Surface Mount Filter
- Operating Temperature -0°C to 70°C
- 1500 Vrms Isolation


Electrical Parameters @ 25° C

Primary Inductance (μ H min.)	Leakage Inductance (μ H Max.)	Interwinding Capacitance (pF Max.)	Insertion Loss (dB Max)	Return Loss (dB)	Common Mode Rejection TX Side (dB Min.)			Crosstalk (dB Typ.)	
					1-10 MHz	@ 50 MHz	@ 100 MHz		@ 200 MHz
@ 100 KHz, 0.1 Vrms	@ 100 KHz, 0.1 Vrms	@ 100 KHz, 0.1 Vrms	1-10 MHz	5-10 MHz	1-10 MHz	@ 50 MHz	@ 100 MHz	@ 200 MHz	5-10 MHz
Xmit & Rcv			Xmit & Rcv	Xmit & Rcv					Xmit & Rcv
150	0.30	10	-1.0	-20	-40	-30	-20	-10	-50

Schematic

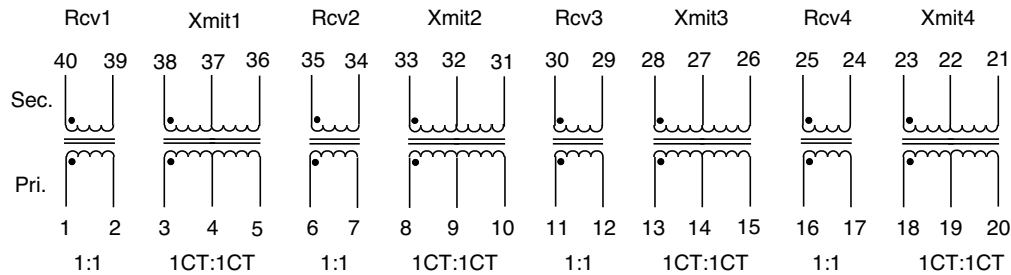

Package

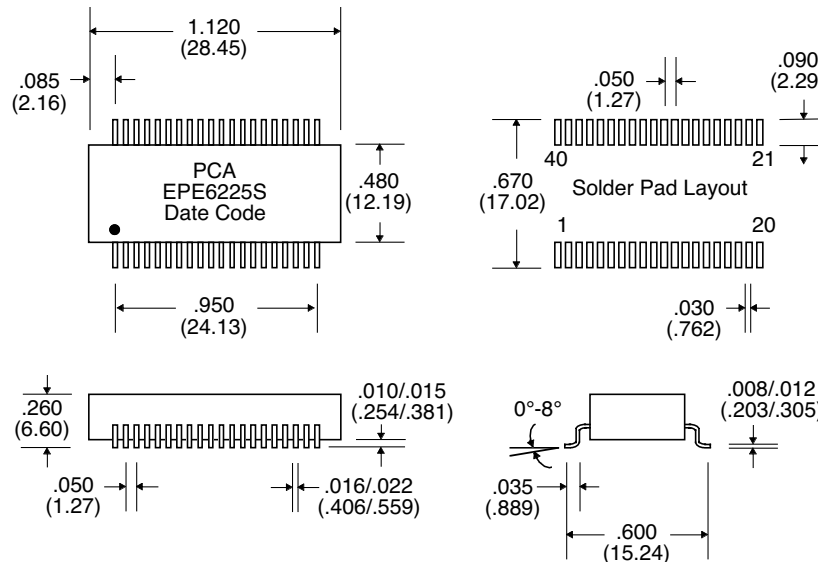

Unless Otherwise Specified Dimensions are in Inches /mm $\pm .010 / .25$