




- Cw/w: 35PF Max TX & RX @100KHz, 0.2V
- LL: 0.6μH Max TX & RX @ 100KHz, 0.2V
- Primary Pins: TX: 1-3
RX: 5-7
- Polarity: 1-16, 5-12 In-Phase
- Operating Temp: -40°C to +85°C

Electrical Specifications @ 25°C

Part Number	OCL(μH Min TX & RX) @ 100KHz, 100mV	Turns Ratio chip: cable (±2%)	Isolation HI-POT (Vrms)
	With 8mA DC Bias		
AHTA-1622I	1200	1:2(TX)/1:1(RX)	1500

All specifications subject to change without notice.

MECHANICAL

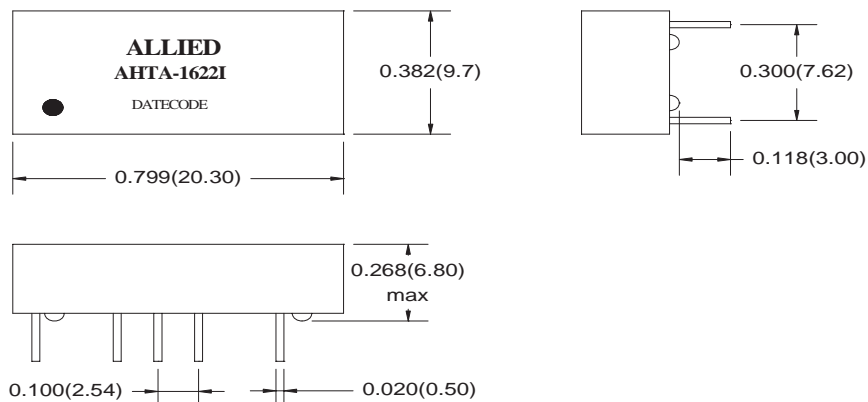

Dimensions: inch(mm)
Unless otherwise specified, all tolerances are ±0.010(0.25)

SCHEMATICS

