


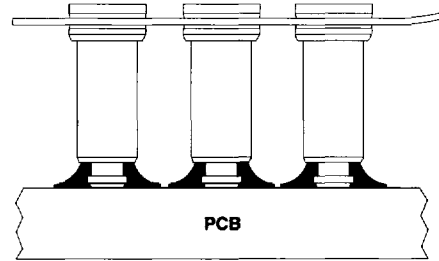


## Surface Mount Single In-line Sockets & Adapters

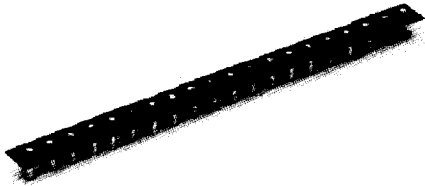

Peel-A-Way® Surface Mount Sockets



Surface Mount Top/Bottom

### Features:

- Sockets surface mount to PCB.
- Supplied in high temperature Peel-A-Way® socket terminal carrier.
- Peel-A-Way® carrier can be left in place for added stability.
- High reliability screw machine terminals with multiple finger beryllium copper contacts.
- Available with solder preforms, See page 49 for preform information.

### Terminals and Contacts:

Terminal: Brass - Copper Alloy 360, ASTM-B-16

Contact: Beryllium Copper - Copper Alloy 172, ASTM-B-194

### Plating:

Terminal: Gold over Nickel or Tin-Lead over Nickel


Contact: Gold over Nickel or Tin-Lead over Nickel

### Body Material:


KSS/KSA - Polyimide Film

Temp. range -269°C to 400°C


### Terminal Information

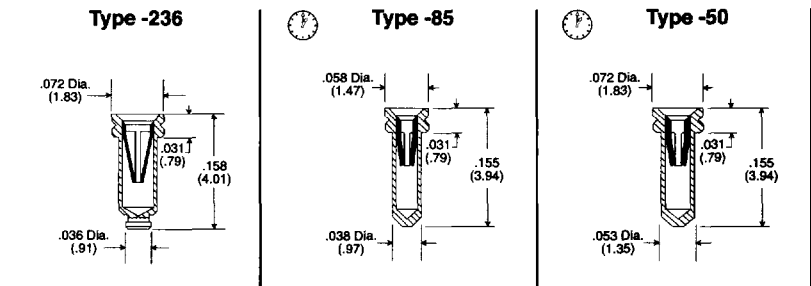

### Type -258




### Type -574



Quick turn delivery available on standard terminal types.

Additional terminal types available. See terminal section for detailed terminal information.


### How To Order

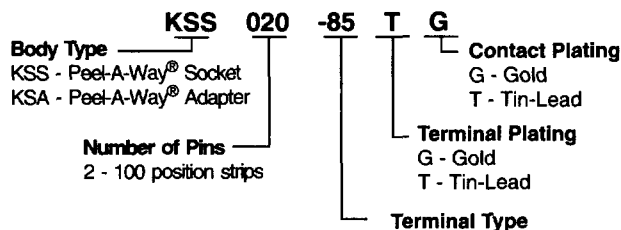

### Socket Options



RTV Sealed - Pg. 50



Solder Preform - Pg.49

See designated pages for how to order information on these socket options.