


GSD

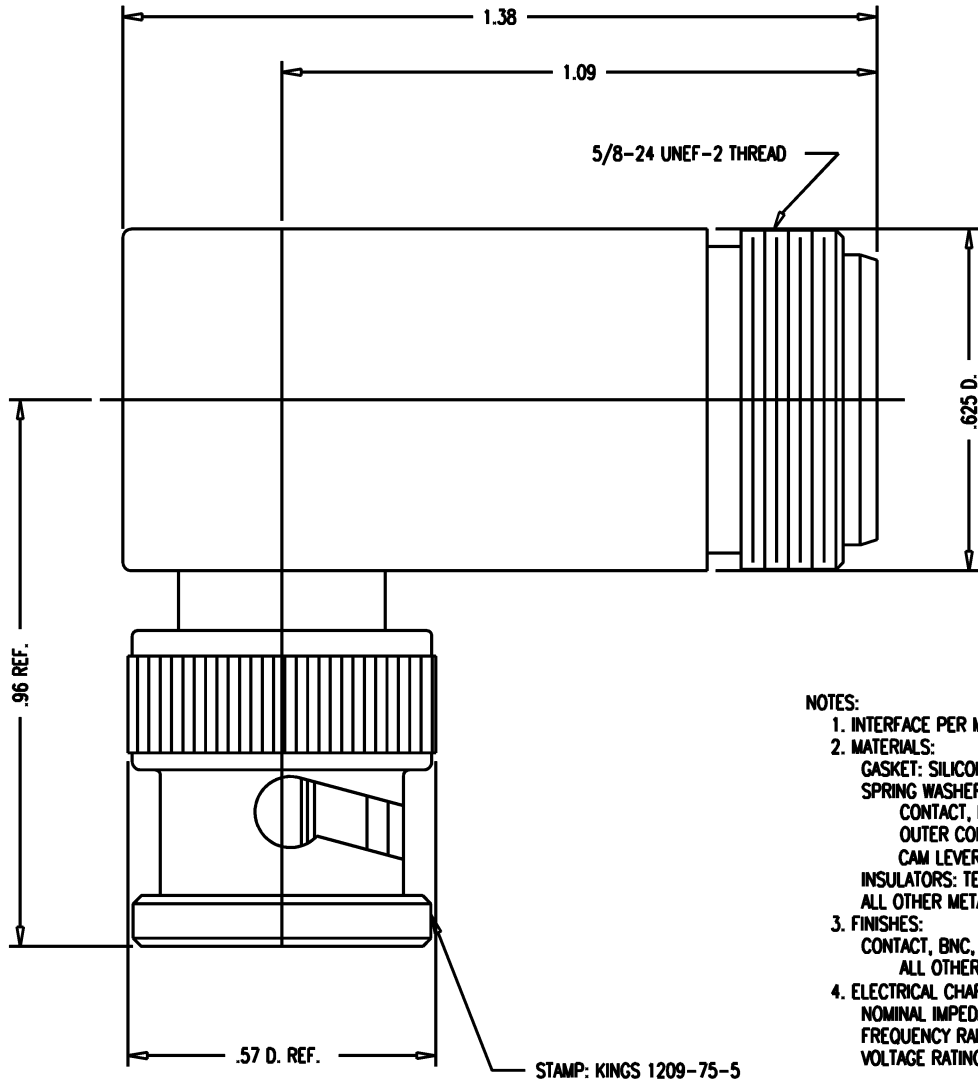

NOTES:

1. INTERFACE PER MIL-STD, FIGURES 313-1 (BNC) AND 304-2 (N)
2. MATERIALS:
 - GASKET: SILICON RUBBER, ZZ-R-765
 - SPRING WASHER
 - CONTACT, F } BER. COPPER, ASTM-B-194
 - OUTER CONTACT }
 - CAM LEVER: BRASS, ASTM-B36
 - INSULATORS: TEFLON, ASTM-D-4894
 - ALL OTHER METAL PARTS: BRASS, ASTM-B16, H02
3. FINISHES:
 - CONTACT, BNC, M & CONTACT, N, F: GOLD PLATE PER MIL-G-45204
 - ALL OTHER METAL PARTS: SILVER PLATE PER QQ-S-365
4. ELECTRICAL CHARACTERISTICS:
 - NOMINAL IMPEDANCE: 50 OHMS
 - FREQUENCY RANGE: 0-4 GHz
 - VOLTAGE RATING: 500 VOLTS RMS

GSD

1209-75-5

REVISIONS

ISSUE	CHANGES
0	ER 37182 PG 11/25/96

JJS0129

SCALE 4:1	
APPROX SURFACE AREA	
WAS E-19241	
USED ON	
REF:	
ADPT, ANG, BNC-N, M-F	
DRAWN PG	11/19/96
DESIGN LI	11/20/96
APPR.	DATE
KINGS ELECTRONICS CO., INC. TUCKAHOE, NEW YORK 10707	

1209-75-5